

|       |         |          |           |
|-------|---------|----------|-----------|
| DATE: | CLIENT: | FIXTURE: | QUANTITY: |
|-------|---------|----------|-----------|

## TITAN HB 160

### LED High Bay with Recessed Kit

Industrial / Commercial / Warehouse /  
Large Box Retailers



### FEATURES / SPECIFICATIONS

#### Fixture

- Aluminum construction
- Polycarbonate protective lens

#### Efficacy

- 126.1 lm/w

#### Color Rendering Index

- 86

#### Wattages

- 160

#### Lumen Maintenance

- 200,000+ Life Hours (L70)

#### Color Temperature

- 3000K
- 3500K
- 4000K
- 5000K

#### Voltage

- 120/277V
- 347/480V

#### Operating Temperature

- -40°C to +40°C

#### Controls

- 0-10V Dimming
- WIFI Dimmable
- Occupancy Sensor

#### Mounting

- Recessed


#### Certifications

- DLC
- cULus

### PERFORMANCE

| MODELS      | Input Watts | Lm/W  | Delivered Lumens |
|-------------|-------------|-------|------------------|
| TITANHB 160 | 159         | 126.1 | 20,048           |

### DIMENSIONS

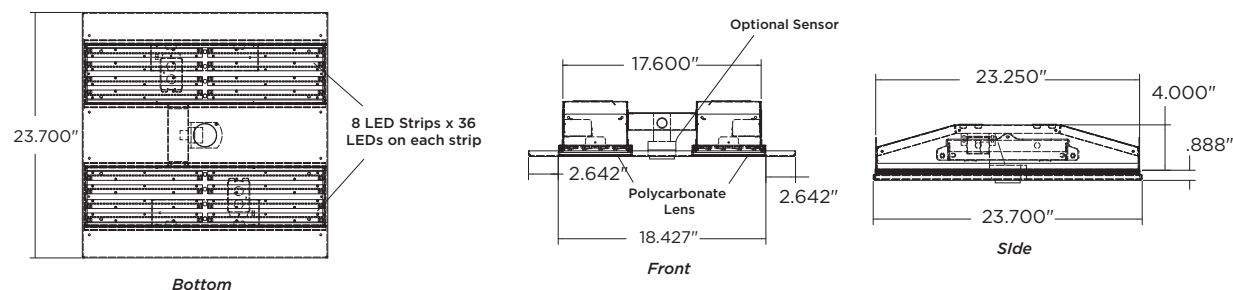

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

**10 Year**  
Warranty

1

**ORDERING OPTIONS**

| MODEL   | WATTS | COLOR TEMP       | VOLTAGE           | LENS                   | FINISH           | MOUNTING         | WIRING                         |
|---------|-------|------------------|-------------------|------------------------|------------------|------------------|--------------------------------|
| TitanHB | 160   | <b>3K</b> 3000K  | <b>U</b> 120/277V | <b>FR</b> Frosted      | <b>WH</b> White  | <b>TG</b> T Grid | <b>BFC</b> Black Flexible Cord |
|         |       | <b>35K</b> 3500K | <b>H</b> 347/480V | <b>CL</b> Clear        | <b>CU</b> Custom |                  | <b>WFC</b> White Flexible Cord |
|         |       | <b>4K</b> 4000K  |                   | <b>CLG</b> Clear Glass |                  |                  |                                |
|         |       | <b>5K</b> 5000K  |                   |                        |                  |                  |                                |

| ACCESSORIES                              | TYPE               | PLUG                      |
|------------------------------------------|--------------------|---------------------------|
| <b>N</b> None                            | <b>RC</b> Recessed | <b>N</b> None             |
| <b>OCC</b> Occupancy Sensor (on/off)     |                    | <b>* See Plug Options</b> |
| <b>WC</b> Wireless Controls*             |                    |                           |
| <b>BLD</b> Bi Level Dimming (100%/10%)   |                    |                           |
| <b>GCC</b> Gasketed and Conformal Coated |                    |                           |
| <b>DA</b> Dimming Wire Accessible        |                    |                           |
| <b>10kV</b> 10kV Surge Protection        |                    |                           |

**NOTE:**

**TitanHB Natatorium** - includes conformal coated boards and gasketing for damp and chlorine rated environments.

**WC** - Please consult factory

|         |       |            |         |      |        |          |        |             |      |      |
|---------|-------|------------|---------|------|--------|----------|--------|-------------|------|------|
| TITANHB | 160   |            |         |      |        | TG       |        |             | RC   |      |
| MODEL   | WATTS | COLOR TEMP | VOLTAGE | LENS | FINISH | MOUNTING | WIRING | ACCESSORIES | TYPE | PLUG |

**\* PLUG OPTIONS**

**5-15P** - 125V 15A T-Slot Plug

**L5-15P** - 125V 15A Locking Plug

**5-20P** - 125V AC 20A T-Slot Plug

**L5-20P** - 125V 20A Locking Plug

**6-15P** - 250V AC 15A 3W/2P Plug NEMA 6-15

**L6-15P** - 250V 15A Locking Plug

**6-20P** - 250V AC 20A Plug

**L6-20P** - 250V 20A Locking Plug

**7-15P** - 277V 15A 3W/2P NEMA 7-15 Plug

**L7-15P** - 277V 15A Locking Plug

**7-20P** - 277V AC 20A Plug

**L7-20P** - 277V 20A Locking Plug

**24-20P** - 347V AV 20A 3W/2P Plug NEMA 24-20

**L24-20P** - 347V 20A Locking Plug

**24-15P** - 347V AC 15A 3W/2 Plug NEMA 24-15