

Date:	Fixture:
Qty:	Client/ Project:



# Titan HB 480

## High Bay

### FEATURES

- TitanHB 160 x 3
- Aluminum construction
- Polycarbonate protective lens
- Dry and Damp Rated
- Driver accessible drawer
- Natatorium option

### SPECIFICATIONS

**Efficacy:**

121.9 Lm/W

**CRI:**

86

**Color Temperature:**

3000K, 3500K, 4000K, 5000K

**Lumen Maintenance:**

200,000+ Life Hours (L70)

**Watts:**

480W

**Voltage:**

120/277V | 347/480V

**Control Options:**

0-10V Dimming, WIFI, Occupancy Sensor, Bi-Level Dimming

**Operating Temperature:**

-25°C to +40°C  
-25°C to +55°C - Option Available

**Mounting Options:**

V Hook, Jack Chain, Aircraft Cable, Mounting Stem, Diecast Mounting Plate, Indirect-Uplight Mounting Bracket

**Wiring Options:**

Black Flexible Cord  
White Flexible Cord




**Accessories:**

Gasketed and Conformal Coated, Dimming Wire Accessible, 10kV Surge Protection

### OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
TitanHB 480	477	121.9	58139

## DIMENSIONS

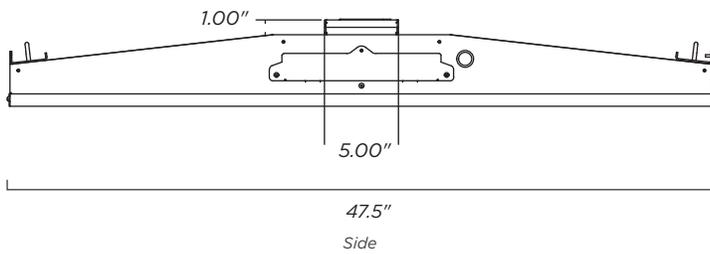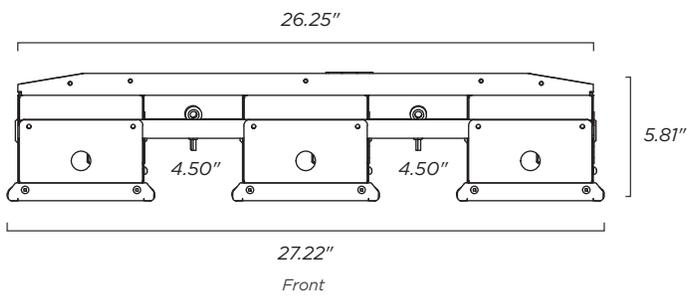

### delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
TitanHB	480	<b>3K</b> 3000K	<b>U</b> 120/277V	<b>FR</b> Frosted	<b>WH</b> White	<b>V</b> V Hook
		<b>35K</b> 3500K	<b>H</b> 347/480V	<b>CL</b> Clear	<b>CU</b> Custom	<b>JC72</b> Jack Chain Set 4 X 72" w/ "S" hooks included
		<b>4K</b> 4000K		<b>CLG</b> Clear Glass		<b>JC96</b> Jack Chain Set 4 X 96" w/ "S" hooks included
		<b>5K</b> 5000K				<b>JC144</b> Jack Chain Set 4 X 144" w/ "S" hooks included
						<b>ACY120</b> Aircraft Cable 120" W/Y Toggles & Adjusters
					<b>ACY200</b> Aircraft Cable 200" W/Y Toggles & Adjusters	

TITANHB						
---------	--	--	--	--	--	--

MOUNTING	WIRING	ACCESSORIES	PLUG
<b>MS3-1/2W</b> Mounting Stem 1/2" IPS (7/8" O.D.) 3' threaded at both ends	<b>BFC</b> Black Flexible Cord	<b>N</b> None	<b>N</b> None
<b>MS4-1/2W</b> Mounting Stem 1/2" IPS (7/8" O.D.) 4' threaded at both ends	<b>WFC</b> White Flexible Cord	<b>OCC</b> Occupancy Sensor (on/off)	<b>+See Plug Options</b>
<b>MS6-1/2W</b> Mounting Stem 1/2" IPS (7/8" O.D.) 6' threaded at both ends		<b>WC</b> Wireless Controls*	
<b>MS8-1/2W</b> Mounting Stem 1/2" IPS (7/8" O.D.) 8' threaded at both ends		<b>BLD</b> Bi Level Dimming (100%/10%)	
<b>1/2 NPT</b> Diecast Mounting Plate with 1/2" NPT		<b>GCC</b> Gasketed and Conformal Coated	
<b>3/4 NPT</b> Diecast Mounting Plate with 3/4" NPT		<b>DA</b> Dimming Wire Accessible	
<b>IND</b> Indirect-Uplight mounting bracket		<b>10kV</b> 10kV Surge Protection	
<b>TG</b> T Grid (Kit)			

--	--	--	--

## NOTE

**TG** - See TitanHB 80 and TitanHB 160 with recessed kit specification sheet or consult factory  
**TitanHB Natatorium** - includes conformal coated boards and gasketing for damp and chlorine rated environments.  
**WC** - Please consult factory

## PLUG OPTIONS

<b>5-15P</b> - 125V 15A T-Slot Plug	<b>6-20P</b> - 250V AC 20A Plug	<b>24-20P</b> - 347V AV 20A 3W/2P Plug NEMA 24-20
<b>L5-15P</b> - 125V 15A Locking Plug	<b>L6-20P</b> - 250V 20A Locking Plug	<b>L24-20P</b> - 347V 20A Locking Plug
<b>5-20P</b> - 125V AC 20A T-Slot Plug	<b>7-15P</b> - 277V 15A 3W/2P NEMA 7-15 Plug	<b>24-15P</b> - 347V AC 15A 3W/2 Plug NEMA 24-15
<b>L5-20P</b> - 125V 20A Locking Plug	<b>L7-15P</b> - 277V 15A Locking Plug	
<b>6-15P</b> - 250V AC 15A 3W/2P Plug NEMA 6-15	<b>7-20P</b> - 277V AC 20A Plug	
<b>L6-15P</b> - 250V 15A Locking Plug	<b>L7-20P</b> - 277V 20A Locking Plug	

## delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.