

Date:	Fixture:
Qty:	Client/ Project:



Titan HB 80

High Bay

FEATURES

- Aluminum construction
- Polycarbonate protective lens
- Dry and Damp Rated
- Driver accessible drawer
- Natatorium option



10 Year
Warranty

SPECIFICATIONS

Efficacy:
117.9 Lm/W

CRI:
86

Color Temperature:
3000K, 3500K, 4000K, 5000K

Lumen Maintenance:
200,000+ Life Hours (L70)

Watts:
80W

Voltage:
120/277V | 347/480V

Control Options:
0-10V Dimming, WIFI, Occupancy
Sensor, Bi-Level Dimming

Operating Temperature:
-25°C to +40°C
-25°C to +55°C - Option Available

Mounting Options:
V Hook, Jack Chain, Aircraft Cable,
Mounting Stem, Diecast Mounting Plate,
Indirect-Uplight Mounting Bracket

Wiring Options:
Black Flexible Cord
White Flexible Cord

Accessories:
Gasketed and Conformal Coated, Dimming
Wire Accessible, 10kV Surge Protection

OUTPUT PERFORMANCE

Model	Watts	Lm/W	Delivered Lumens
TitanHB 80	81.5	117.9	9609

Note: Not all products are qualified on the DLC QPL.
To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.





delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS

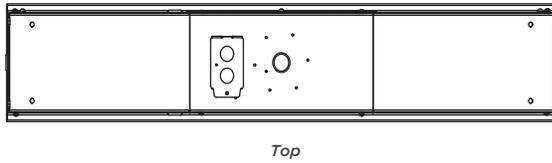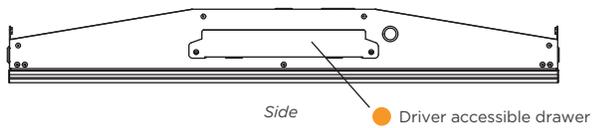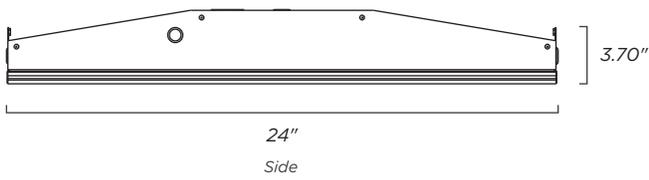

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
TitanHB	80	3K 3000K	U 120/277V	FR Frosted	WH White	V V Hook
		35K 3500K	H 347/480V	CL Clear	CU Custom	JC72 Jack Chain Set 4 X 72" w/ "S" hooks included
		4K 4000K		CLG Clear Glass		JC96 Jack Chain Set 4 X 96" w/ "S" hooks included
		5K 5000K				JC144 Jack Chain Set 4 X 144" w/ "S" hooks included
						ACY120 Aircraft Cable 120" W/Y Toggles & Adjusters
						ACY200 Aircraft Cable 200" W/Y Toggles & Adjusters

TITANHB	80					
---------	----	--	--	--	--	--

MOUNTING	WIRING	ACCESSORIES	PLUG
MS3-1/2W Mounting Stem 1/2" IPS (7/8" O.D.) 3' threaded at both ends	BFC Black Flexible Cord	N None	N None
MS4-1/2W Mounting Stem 1/2" IPS (7/8" O.D.) 4' threaded at both ends	WFC White Flexible Cord	OCC Occupancy Sensor (on/off)	+See Plug Options
MS6-1/2W Mounting Stem 1/2" IPS (7/8" O.D.) 6' threaded at both ends		WC Wireless Controls*	
MS8-1/2W Mounting Stem 1/2" IPS (7/8" O.D.) 8' threaded at both ends		BLD Bi Level Dimming (100%/10%)	
1/2 NPT Diecast Mounting Plate with 1/2" NPT		GCC Gasketed and Conformal Coated	
3/4 NPT Diecast Mounting Plate with 3/4" NPT		DA Dimming Wire Accessible	
IND Indirect-Uplight mounting bracket		10kV 10kV Surge Protection	
TG T Grid (Kit)			

--	--	--	--

NOTE

TG - See TitanHB 80 and TitanHB 160 with recessed kit specification sheet or consult factory
TitanHB Natatorium - includes conformal coated boards and gasketing for damp and chlorine rated environments.
WC - Please consult factory

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug	6-20P - 250V AC 20A Plug	24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L5-15P - 125V 15A Locking Plug	L6-20P - 250V 20A Locking Plug	L24-20P - 347V 20A Locking Plug
5-20P - 125V AC 20A T-Slot Plug	7-15P - 277V 15A 3W/2P NEMA 7-15 Plug	24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15
L5-20P - 125V 20A Locking Plug	L7-15P - 277V 15A Locking Plug	
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15	7-20P - 277V AC 20A Plug	
L6-15P - 250V 15A Locking Plug	L7-20P - 277V 20A Locking Plug	