



Troffer 1x4

Retrofit

FEATURES

- LED upgrade to existing lighting fixtures
- Frosted, clear, and no lens options
- Easy installation
- 18 gauge aluminum
- High gloss white finish



10 Year
Warranty

SPECIFICATIONS

Efficacy:

Up to 115 Lm/W

CRI:

83+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

150,000+ Life Hours (L70)

Watts:

15W, 20W, 30W, 40W, 60W

Voltage:

120/277V | 347V

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +40°C

Mounting Options:

Retrofit

OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
TRFT2 1x4 15*	13.9	115.1	1601
TRFT2 1x4 20	21.6	112.5	2434
TRFT2 1x4 30	30.9	104.7	3242
TRFT2 1x4 40	40.3	100.4	4050
TRFT2 1x4 60	60.1	98	5831

Note: TRFT2 1x4 15 - 120/277V Only

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS

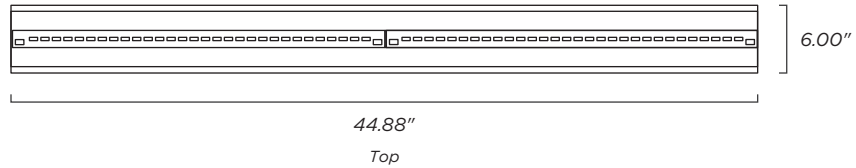

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
TRFT2 1x4	15	3K 3000K	U 120/277V	FR Frosted	WH White	RT Retrofit
	20	35K 3500K	H 347V	CL Clear		
	30	4K 4000K		NL No Lens		
	40	5K 5000K				
	60					
TRFT2 1x4					WH	RT

PLUG

N None
•See Plug Options

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug	6-20P - 250V AC 20A Plug	24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L5-15P - 125V 15A Locking Plug	L6-20P - 250V 20A Locking Plug	L24-20P - 347V 20A Locking Plug
5-20P - 125V AC 20A T-Slot Plug	7-15P - 277V 15A 3W/2P NEMA 7-15 Plug	24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15
L5-20P - 125V 20A Locking Plug	L7-15P - 277V 15A Locking Plug	
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15	7-20P - 277V AC 20A Plug	
L6-15P - 250V 15A Locking Plug	L7-20P - 277V 20A Locking Plug	