



Troffer 2x2

Retrofit

FEATURES

- LED upgrade to existing lighting fixtures
- Frosted, clear, and no lens options
- Easy installation
- 18 gauge aluminum
- High gloss white finish



SPECIFICATIONS

Efficacy:

Up to 114 Lm/W

CRI:

83+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

150,000+ Life Hours (L70)

Watts:

15W, 20W, 30W, 40W, 60W

Voltage:

120/277V | 347V

Control Options:

0-10V Dimming

Operating Temperature:

-40°C to +40°C

Mounting Options:

Retrofit

OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
TRFT2 2x2 15	13.9	100.5	1399
TRFT2 2x2 20	21.5	96.6	2082
TRFT2 2x2 30	31.4	109.1	3430
TRFT2 2x2 40	36.5	114.2	4175
TRFT2 2x2 60	58.9	112.9	6655

Note: Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

DIMENSIONS

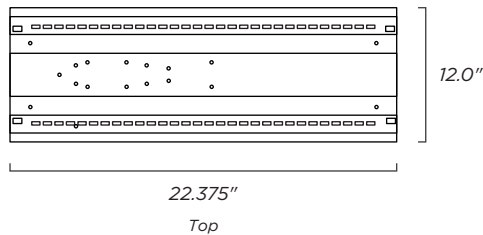

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
TRFT2 2x2	15	3K 3000K	U 120/277V	FR Frosted	WH White	RT Retrofit
	20	35K 3500K	H 347V	CL Clear		
	30	4K 4000K		NL No Lens		
	40	5K 5000K				
	60					

TRFT2 2x2					WH	RT
------------------	--	--	--	--	-----------	-----------

PLUG	
-------------	--

N None
•See Plug Options

--	--

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug	6-20P - 250V AC 20A Plug	24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L5-15P - 125V 15A Locking Plug	L6-20P - 250V 20A Locking Plug	L24-20P - 347V 20A Locking Plug
5-20P - 125V AC 20A T-Slot Plug	7-15P - 277V 15A 3W/2P NEMA 7-15 Plug	24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15
L5-20P - 125V 20A Locking Plug	L7-15P - 277V 15A Locking Plug	
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15	7-20P - 277V AC 20A Plug	
L6-15P - 250V 15A Locking Plug	L7-20P - 277V 20A Locking Plug	