



TriLight

Linear

FEATURES

- Aluminum body
- Slim profile
- White finish
- Polycarbonate lens
- 4 and 8 foot length options

10 Year
Warranty

SPECIFICATIONS

Efficacy:

100 Lm/W

CRI:

83

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

150,000+ Life Hours (L70)

Watts:

4': 20W

8': 40W

Voltage:

120/277V | 347V

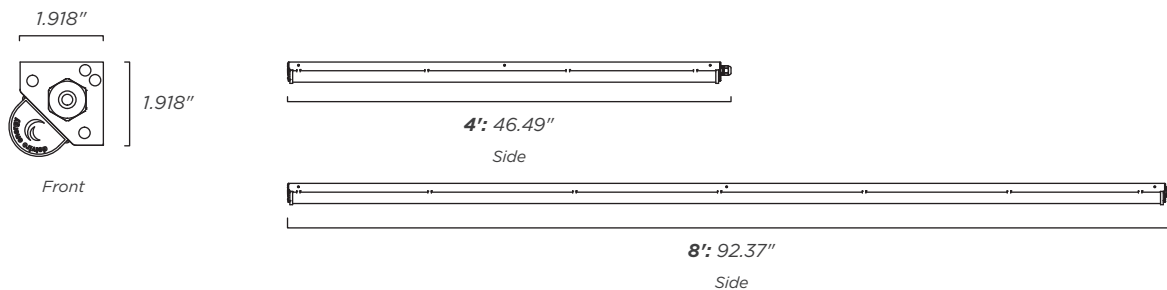
Control Options:

0-10V Dimming

OUTPUT PERFORMANCE

Model	Length	Input Watts	Lm/W	Delivered Lumens
Trilight 4	4'	20	110	2,200
Trilight 8	8'	40	110	4,400

DIMENSIONS


delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	LENGTH	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH
TriLight	4'	20	3K 3000K	U 120/277V	FR Frosted	WH White
	8'	40	35K 3500K	H 347V		
			4K 4000K			
			5K 5000K			

TRILIGHT					FR	WH
----------	--	--	--	--	----	----

ACCESSORIES	PLUG
N None BFC Black Flexible Cord —" EXT Int Cable by "	N None *See Plug Options

--	--	--

PLUG OPTIONS

5-15P - 125V 15A T-Slot Plug
L5-15P - 125V 15A Locking Plug
5-20P - 125V AC 20A T-Slot Plug
L5-20P - 125V 20A Locking Plug
6-15P - 250V AC 15A 3W/2P Plug NEMA 6-15
L6-15P - 250V 15A Locking Plug

6-20P - 250V AC 20A Plug
L6-20P - 250V 20A Locking Plug
7-15P - 277V 15A 3W/2P NEMA 7-15 Plug
L7-15P - 277V 15A Locking Plug
7-20P - 277V AC 20A Plug
L7-20P - 277V 20A Locking Plug

24-20P - 347V AV 20A 3W/2P Plug NEMA 24-20
L24-20P - 347V 20A Locking Plug
24-15P - 347V AC 15A 3W/2 Plug NEMA 24-15