

Date:	Fixture:
Qty:	Client/ Project:



## VTS

### Vapor Tight Fixture

#### FEATURES

- 4 and 8 foot length options
- Enclosed and gasketed body protects electronics from harsh weather elements
- Moisture, Vapor, Chemical Resistant, Corrosion Free
- Dust and Moisture protective
- Frosted and Clear lens options
- IP 65
- IP 67
- NFS Available



**10 Year**  
Warranty

#### SPECIFICATIONS

##### Efficacy:

4': Up to 133 Lm/W | 8': Up to 150 Lm/W

##### CRI:

85

##### Color Temperature:

3000K, 3500K, 4000K, 5000K

##### Lumen Maintenance:

200,000+ Life Hours (L70)

##### Watts:

4': 30W, 40W, 60W, 80W

8': 40W, 60W, 80W, 120W

##### Voltage:

120/277V | 347/480V

##### Control Options:

0-10V Dimming

##### Operating Temperature:

-40°C to +40°C

+55°C - option available

##### Mounting Options:

Suspended

##### Wiring Options:

Black Flexible Cord

White Flexible Cord

##### Accessories:

Occupancy Sensor (waterproof option available), Bi-Level Dimming (waterproof option available), Photo Control, 10kV Surge Protection

#### OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
VT4s 30	29.4	133.3	3922
VT4s 40	39.5	131.4	5155
VT4s 60	59.6	127.6	7621
VT4s 80	83.9	120.0	10075

VT4s - 4' Vapor Tight

Model	Input Watts	Lm/W	Delivered Lumens
VT8s 40	37	150	5550
VT8s 60	56	148	8288
VT8s 80	79	140	11060
VT8s 120	115	131	15065

VT8s - 4' Vapor Tight

**Note:** Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/qpl](http://www.designlights.org/qpl).

#### delviro energy


94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | [info@delviro.com](mailto:info@delviro.com) | [www.delviro.com](http://www.delviro.com)

© delviro energy 2018


Specifications subject to change without notice.

**DIMENSIONS**


**Vapor Tight 4s**

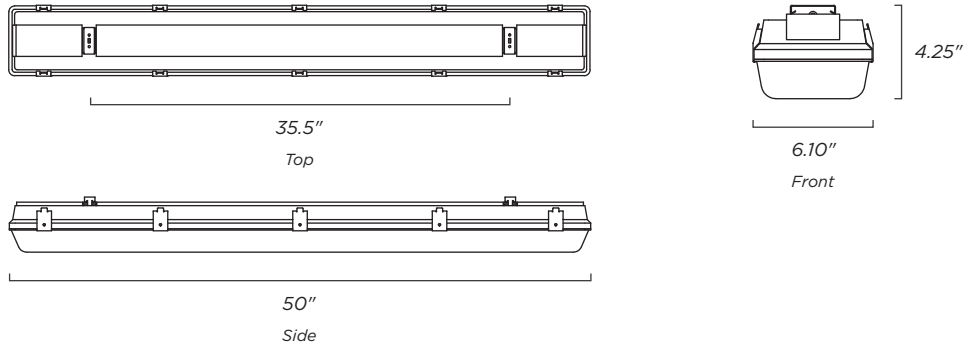

**Vapor Tight 8s**

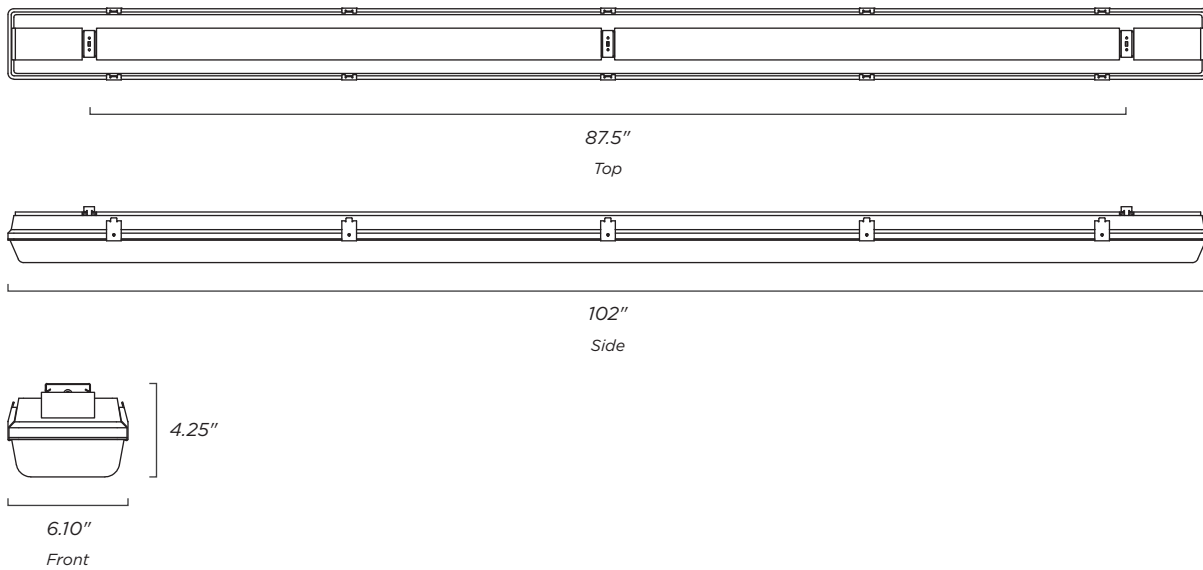

**STANDARD MOUNTING BRACKET**

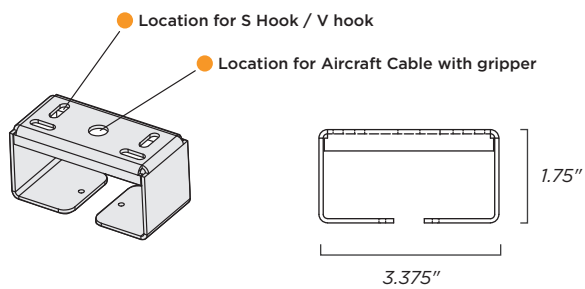

**delviro energy**

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING
<b>VT4S</b>	<b>30, 40, 60, 80</b>	<b>3K</b> 3000K	<b>U</b> 120/277V	<b>*FR</b> Frosted	<b>GRY</b> Grey	<b>AC</b> Aircraft Cable
<b>VT8S</b>	<b>40, 60, 80, 120</b>	<b>35K</b> 3500K	<b>H</b> 347V	<b>CL</b> Clear	<b>CU</b> Custom	<b>V</b> V Hooks
		<b>4K</b> 4000K				
		<b>5K</b> 5000K				

WIRING	ACCESSORIES	PLUG
<b>BFC</b> Black Flexible Cord	<b>N</b> None	<b>N</b> None
<b>WFC</b> White Flexible Cord	<b>OCC</b> Occupancy Sensor (on/off)	<b>*See Plug Options</b>
	<b>BLD</b> Bi Level Dimming (100%/10%)	
	<b>WBD</b> Waterproof Bi-Level Dimming (100%/10%)	
	<b>WOC</b> Waterproof Occupancy Sensor (on/off)	
	<b>PC</b> Photo Control	
	<b>HT</b> High Temperature +55°C	
	<b>10kV</b> 10kV Surge Protection	

NOTE
<p><b>FR</b> - Frosted lens for VT4S model only</p> <p><b>CU</b> - Custom finishes - Please contact factory</p> <p><b>PC</b> - Photo Control - Please specify voltage (120V, 208-277V, 347V, 480V)</p> <p><b>HT</b> - High Temperature +55°C - Specify if dimming required - Please consult factory</p>

PLUG OPTIONS
<b>5-15P</b> - 125V 15A T-Slot Plug
<b>L5-15P</b> - 125V 15A Locking Plug
<b>5-20P</b> - 125V AC 20A T-Slot Plug
<b>L5-20P</b> - 125V 20A Locking Plug
<b>6-15P</b> - 250V AC 15A 3W/2P Plug NEMA 6-15
<b>L6-15P</b> - 250V 15A Locking Plug
<b>6-20P</b> - 250V AC 20A Plug
<b>L6-20P</b> - 250V 20A Locking Plug
<b>7-15P</b> - 277V 15A 3W/2P NEMA 7-15 Plug
<b>L7-15P</b> - 277V 15A Locking Plug
<b>7-20P</b> - 277V AC 20A Plug
<b>L7-20P</b> - 277V 20A Locking Plug
<b>24-20P</b> - 347V AV 20A 3W/2P Plug NEMA 24-20
<b>L24-20P</b> - 347V 20A Locking Plug
<b>24-15P</b> - 347V AC 15A 3W/2 Plug NEMA 24-15