

Date:	Fixture:
Qty:	Client/ Project:



## Zip Light

### DSL Linear

#### FEATURES

- Frosted acrylic lens shields the LEDs from direct view
- Screw in LED pan single ground screw for easy installation
- Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment
- Glass free polycarbonate shatter-proof lens safe for food plants
- Dry and Damp rated
- 2 and 4 foot length options



**10 Year**  
Warranty

#### SPECIFICATIONS

**Efficacy:**

Up to 140 Lm/W

**CRI:**

86

**Color Temperature:**

3000K, 3500K, 4000K, 5000K

**Lumen Maintenance:**

200,000+ Life Hours (L70)

**Voltage:**

120/277V | 347V

**Control Options:**

0-10V Dimming

**Operating Temperature:**

-30°C to +45°C

**Mounting Options:**

Flush Mount

**Wiring Options:**

Black Flexible Cord  
White Flexible Cord

**Accessories:**

Occupancy Sensor, Ultrasonic BLD sensor,  
Battery Backup, Bi Level Dimming,  
Emergency Backup, 10kV Surge Protection

#### OUTPUT PERFORMANCE

Model	Input Watts	Lm/W	Delivered Lumens
Zip 2 20	22.1	135.1	2999

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 20	20.3	140	2885
Zip 4 40	41.6	140	5378
Zip 4 60	59.7	140	8272

**Note:** Not all products are qualified on the DLC QPL.

To view our DLC qualified products, please consult the DLC qualified products list at [www.designlights.org/gpl](http://www.designlights.org/gpl).




**delviro energy**

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | [info@delviro.com](mailto:info@delviro.com) | [www.delviro.com](http://www.delviro.com)

© delviro energy 2018


Specifications subject to change without notice.

## DIMENSIONS

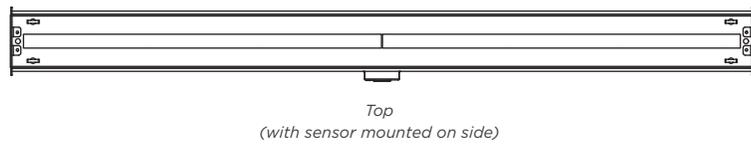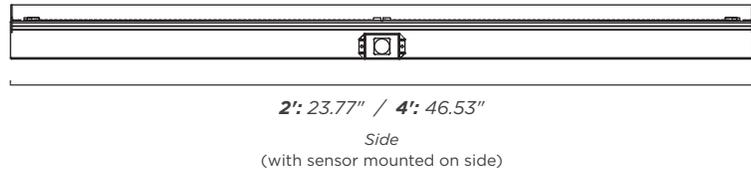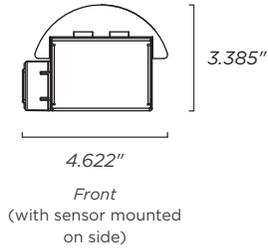


## SENSOR MOUNTING


End

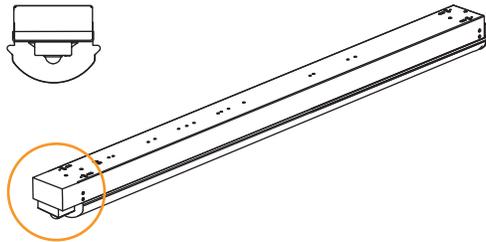


Down / Middle

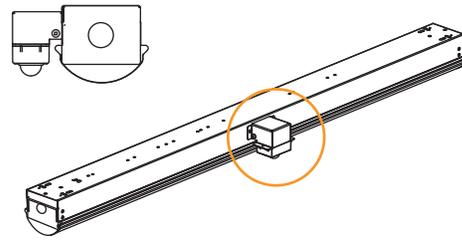

Sideways

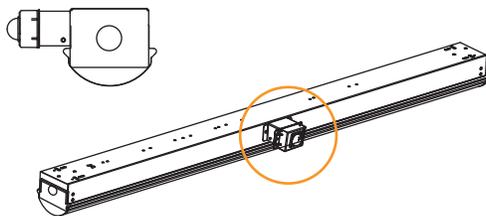

45° Angle

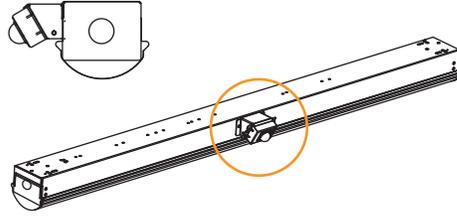

## ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING	WIRING
<b>Zip 2</b>	<b>20</b>	<b>3K</b> 3000K	<b>U</b> 120/277V	<b>FR</b> Frosted	<b>WH</b> White	<b>FM</b> Flush Mount	<b>IN</b> No Cord Internal Wiring (standard)
<b>Zip 4</b>	<b>20</b>	<b>35K</b> 3500K	<b>H</b> 347/480V	<b>CL</b> Clear		<b>V</b> V Hook	<b>BFC</b> Black Flexible Cord
	<b>40</b>	<b>4K</b> 4000K					<b>WFC</b> White Flexible Cord
	<b>60</b>	<b>5K</b> 5000K					
					<b>WH</b>		

ACCESSORIES			TYPE	PLUG	
<b>N</b>	None	<b>DBD25E</b>	Occupancy Sensor - End pointing down. Dim to 25%	<b>DSL</b> Delviro Stair Light	<b>N</b> None <b>*See Plug Options</b>
<b>OCC</b>	Occupancy Sensor (on/off)	<b>DBD40E</b>	Occupancy Sensor - End pointing down. Dim to 40%		
<b>UOCC</b>	Ultrasonic BLD Sensor	<b>DBD25D</b>	Occupancy Sensor - Middle pointing down. Dim to 25%		
<b>BAT</b>	Battery Backup	<b>DBD40D</b>	Occupancy Sensor - Middle pointing down. Dim to 40%		
<b>BLD</b>	Bi Level Dimming (100%/10%) - Programmable	<b>DBD25S</b>	Occupancy Sensor pointing Sideways. Dim to 25%		
<b>EM</b>	Emergency Battery	<b>DBD40S</b>	Occupancy Sensor pointing Sideways. Dim to 40%		
<b>10kV</b>	10kV Surge Protection	<b>DBD25A</b>	Occupancy Sensor pointing at 45° angle. Dim to 25%		
		<b>DBD40A</b>	Occupancy Sensor pointing at 45° angle. Dim to 40%		
				<b>DSL</b>	

NOTE
<b>BAT</b> - Battery Backup limited to 120/277V

PLUG OPTIONS		
<b>5-15P</b> - 125V 15A T-Slot Plug	<b>6-20P</b> - 250V AC 20A Plug	<b>24-20P</b> - 347V AV 20A 3W/2P Plug NEMA 24-20
<b>L5-15P</b> - 125V 15A Locking Plug	<b>L6-20P</b> - 250V 20A Locking Plug	<b>L24-20P</b> - 347V 20A Locking Plug
<b>5-20P</b> - 125V AC 20A T-Slot Plug	<b>7-15P</b> - 277V 15A 3W/2P NEMA 7-15 Plug	<b>24-15P</b> - 347V AC 15A 3W/2 Plug NEMA 24-15
<b>L5-20P</b> - 125V 20A Locking Plug	<b>L7-15P</b> - 277V 15A Locking Plug	
<b>6-15P</b> - 250V AC 15A 3W/2P Plug NEMA 6-15	<b>7-20P</b> - 277V AC 20A Plug	
<b>L6-15P</b> - 250V 15A Locking Plug	<b>L7-20P</b> - 277V 20A Locking Plug	