



Fixture: _____

Date: _____ QTY: _____

Client/Project: _____

ZIP ECO

LED Linear Luminaire

Product Details

LED Luminaire. 4 and 8' length options. Steel construction. Frosted acrylic lens. Wall mountable option. Screw in LED pan single ground screw for easy installation. Enclosed lens prevents penetration of dust, insects, and other debris into the lamp compartment. Glass free polycarbonate shatter-proof lens safe for food plants. Dry and Damp rated. DLC listed. 10 Year Warranty.

Specifications

Efficacy: 4': 130 Lm/W | 8': Up to 146 Lm/W

CRI: 86

Color Temperature: 4000K, 5000K

Lumen Maintenance: 200,000+ Life Hours (L70)

Voltage: 120/277V | 347V

Watts: 4': 20W, 30W, 40W | 8': 40W, 60W, 80W

Controls: 0-10V Dimming (347V option)

Operating Temperature: -35°C to +45°C

Mounting Option

Suspended, Flush Mount

Accessories

Occupancy Sensor, 10kV Surge Protection

Output Performance

Model	Input Watts	Lm/W	Delivered Lumens
Zip 4 20	20	130	2,600
Zip 4 30	30	130	3,900
Zip 4 40	38	130	4,940

Model	Input Watts	Lm/W	Delivered Lumens
Zip 8 40	38	140	5,320
Zip 8 60	60	146	8,760
Zip 8 80	75	140	10,500






Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

Specifications subject to change without notice.

Zip Eco

Dimensions

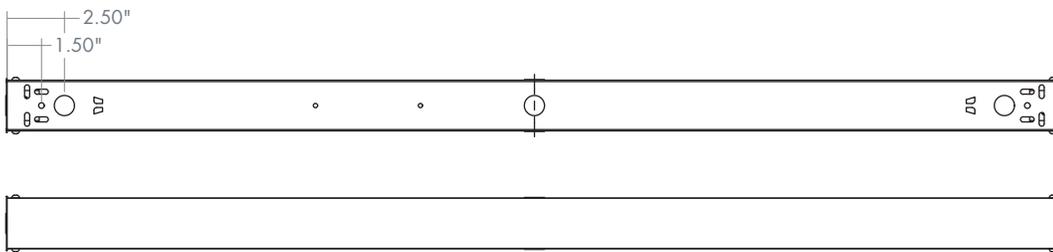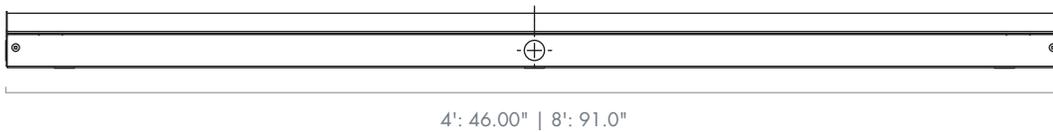

Zip Eco

Ordering Guide

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH	MOUNTING	WIRING
Zip 4	20, 30, 40	4K 4000K	U 120/277V	FR Frosted	WH White	V V Clips	BFC Black Flexible Cord
Zip 8	40, 60, 80	5K 5000K	H 347V			FM Flush Mount	
				FR	WH		BFC
ACCESSORIES		TYPE					
N	None	ZIP ECO					
OCC	Occupancy Sensor (on/off)						
10kV	10kV Surge Protection						
		ZIP ECO					