



Zip Square

Suspended | Flush Mount

delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com

www.delviro.com



Zip Cloud Square

Suspended | Flush

FEATURES

- Contemporary design
- Direct and direct-indirect distributions
- Aluminum housing
- Integrated driver
- 2' x 2' size



10 Year
Warranty

SPECIFICATIONS

Efficacy:

100 Lm/W

CRI:

80+

Color Temperature:

3000K, 3500K, 4000K, 5000K

Lumen Maintenance:

200,000+ Life Hours (L70)

Voltage:

120V, 277V, 347V, Univ

Control Options:

0-10V Dimming, Occupancy Sensor,
Daylight Sensor

Mounting Options:

Suspended
Flush Mount

Wiring Options:

Black and White Flexible Cord,
5 Conductor Wire

OUTPUT PERFORMANCE


Models	Input Watts	Lm/W	Delivered Lumens
Direct	20	100	2,000
	40	100	4,000
	60	100	6,000

*Direct: Suspended and Flush Mount Models


Models	Input Watts	Lm/W	Delivered Lumens
Direct - Indirect	20 / 20	100	2000 / 2000
	20 / 40	100	2000 / 4000
	20 / 60	100	2000 / 6000
	40 / 20	100	4000 / 2000
	40 / 40	100	4000 / 4000
	40 / 60	100	4000 / 6000
	60 / 20	100	6000 / 2000
	60 / 40	100	6000 / 4000
	60 / 60	100	6000 / 6000

DIMENSIONS


Suspended Direct - Indirect

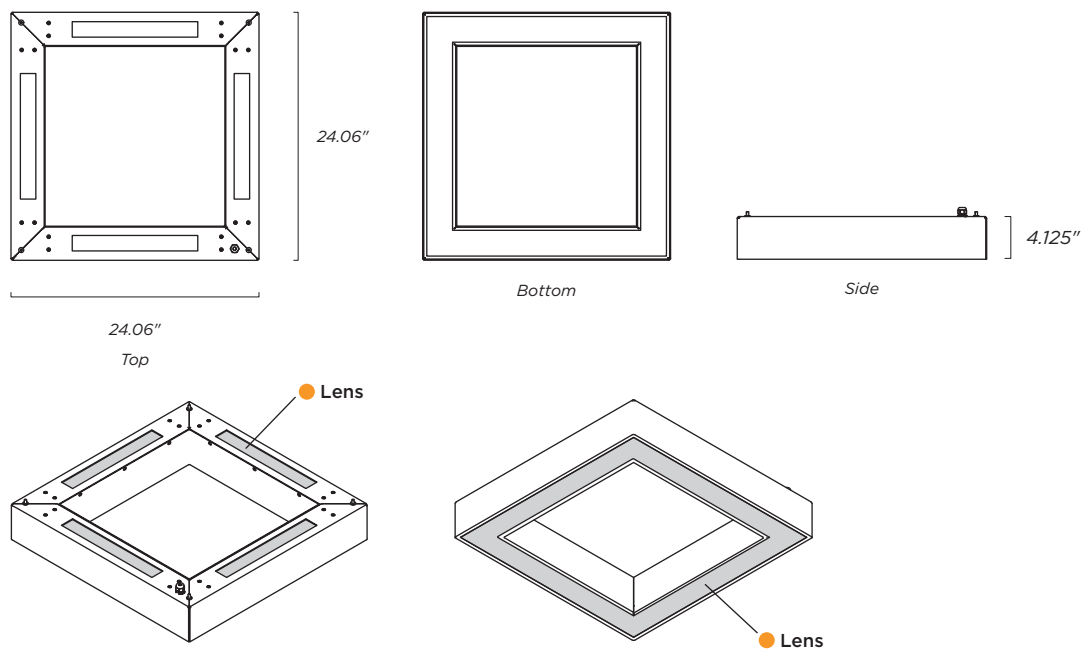

Suspended Direct

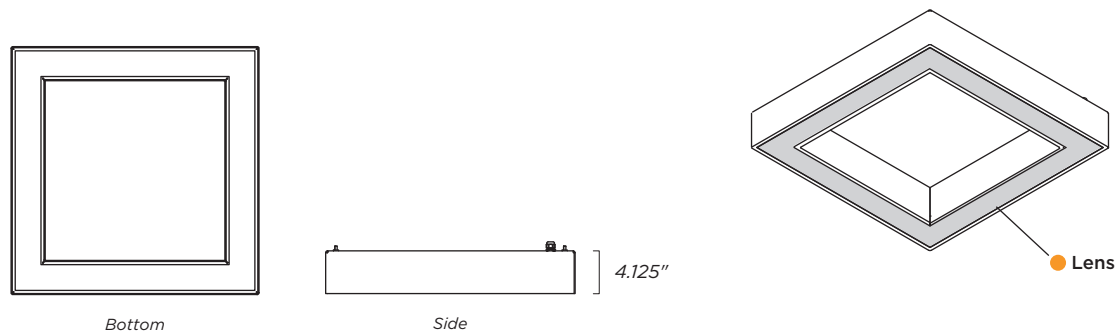

Flush Mount



delviro energy

94 Brockport Drive, Toronto, Ontario, M9W 7J8 | Tel. 1.877.502.3434 | info@delviro.com | www.delviro.com

© delviro energy 2018

Specifications subject to change without notice.

ORDERING GUIDE

MODEL	WATTS	COLOR TEMP	VOLTAGE	LENS	FINISH
Zip Cloud Square Flush	20, 40, 60	3K 3000K	120V	FR Frosted	WH White
Zip Cloud Square Direct	20, 40, 60	35K 3500K	277V		CU Custom
Zip Cloud Square Direct-Indirect	20 / 20	4K 4000K	347V		
	20 / 40	5K 5000K	Univ		
	20 / 60				
	40 / 20				
	40 / 40				
	40 / 60				
	60 / 20				
	60 / 40				
	60 / 60				

				FR	
--	--	--	--	----	--

MOUNTING	WIRING	ACCESSORIES	CANOPY FINISH
SUS D Suspended Direct	N None	N None	WH White (Default)
SUS D/I Suspended Direct-Indirect	BFC Black Flexible Cord	OCC Occupancy Sensor	CU Custom
FM Flush Mount	WFC White Flexible Cord	DLS Daylight Sensor	
	5 WIRE W 5 Conductor Wire White	DLOCC Daylight Sensor w/ Occupancy Sensor	
	5 WIRE B 5 Conductor Wire Black	DIMOFF 0-10 1% Dim to off Driver	

--	--	--	--

NOTE
CU - Please consult factory OCC DLS DLOCC - Please consult factory