



DLC on Some
Linear Models

Date: _____ Fixture: _____

QTY: _____ Project: _____

Thinline 4.5

Recessed with Trim

Multiple Lens and Customizations Available

Architectural luminaire. Recessed mounting. Slim contemporary design. Continuous runs with lit corners available. L90 > 70K Hours. Designed and manufactured in North America. 10 Year Warranty.

Performance

Color Temp	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Ordering Options

MODEL	LENGTH	DIR LUMENS	CRI	COLOR TEMP	VOLTAGE	LENS	FINISH
DTL RECTR 4.5	CR _____ - Min 2' - Available in 6" increments - Unibody, up to 8'	D 250 D 500 D 750 D 1000 D _____ Custom Up to 1200	80 90	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K BIOS	U 120/277V H 347V	FR Frosted FRREG Frosted Regressed ASY Asymmetric .5" FR DROP 1.5" FR DROP	WH White CU Custom

DTL RECTR 4.5							
---------------	--	--	--	--	--	--	--

DRIVER	CONTROLS	ACCESSORIES	DOWNLIGHT
DIMOFF 0-10 1% DIMOFF Driver LUTRON Lutron Ecosystem Driver SR Philips SR DALI .1% ELDO LED Driver ELDO * 347 only in 1 - 10 5%	N None DMX SNS Philips SNS 300 w/ BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	N None 10kV 10kV Surge Protection EMBAT 6W 90 Min BAT	DL# _____ POS _____ POS END MID BEG MULTIPLE

--	--	--	--

SAMPLE: DTL RECTR 4.5 - CR8 - 500 - 80 - 35K - U - FR - WH - DIMOFF - N - N - DLO

Available with BIOS® (please consult factory)

Specifications subject to change without notice.

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

10YR
WARRANTY

LED

L90 > 70,000

Samsung 301 3 McAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%


Optics

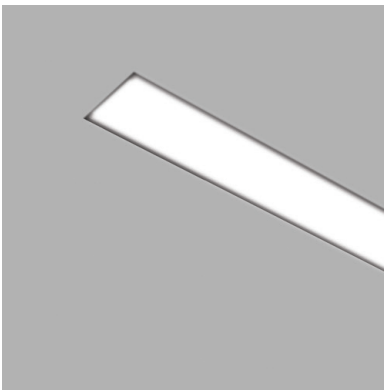

Flat

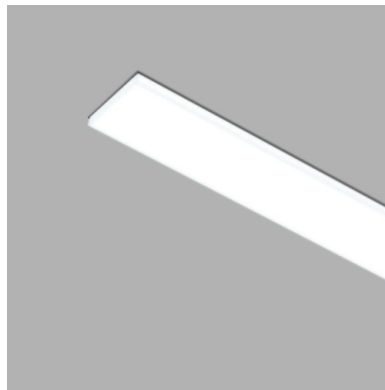


0.5" Drop Lens

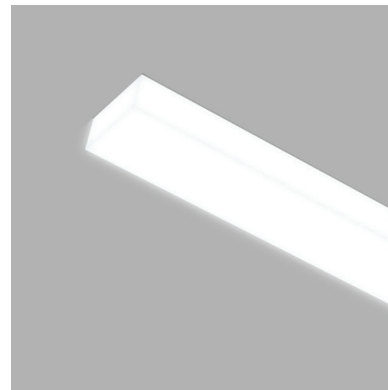


1.5" Drop Lens

Downlight

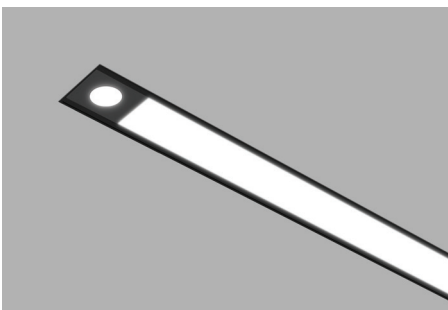

Start

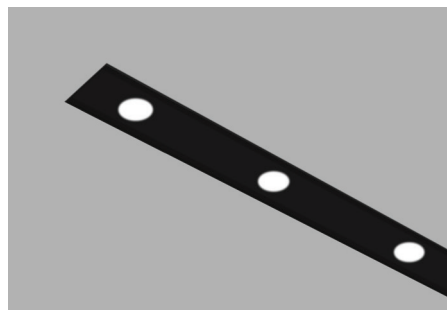


Multiple

Beam 60°

Lumens 50



Watts 4

Lens Options



4.5"



Standard
Frosted Flat



4.5"



0.25"
Regressed Lens

0.25"



4.5"



Asymmetric



0.5"

4.5"


0.5" Drop Lens




1.5"

4.5"


1.5" Drop Lens



Mounting - Drywall

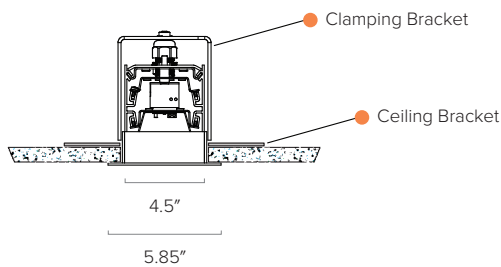

Measurements

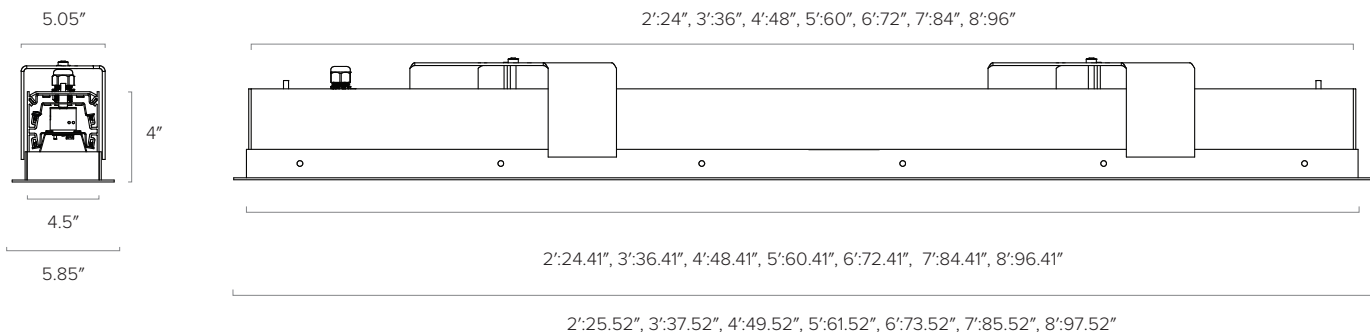


Note: Dimensions are for reference only. Please make measurements for actual dimensions

Lit Corner Hubs



Lit Corner 90°



Lit Corner 135°



T-Hub



Y-Hub




X-Hub


**** Custom Available ****

Lit Corner Hubs - Shapes


Sample Configurations




Lit Corner Hub 90°



Lit Corner Hub 90°

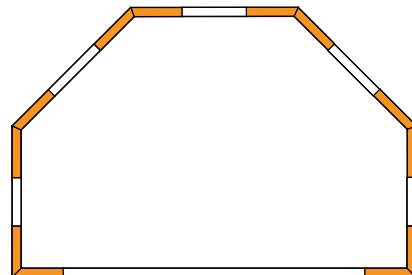


Lit Corner Hub 90° & Lit Corner Hub 135°

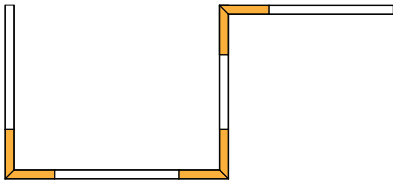


Lit Corner Hub 90°




Lit Corner Hub 90°

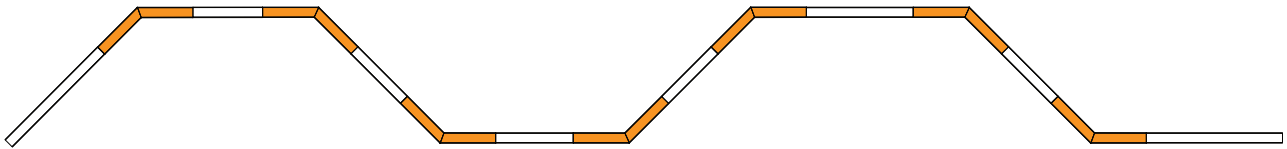


Lit Corner Hub 135°

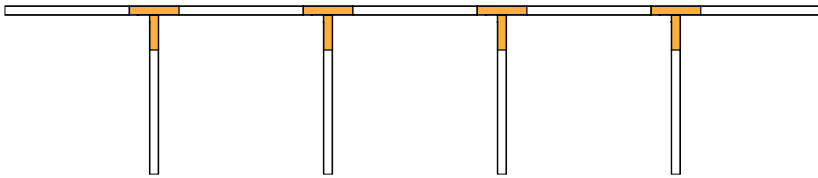

Lit Corner T-Hub



Lit Corner X-Hub



Lit Corner Y-Hub