


DLC on Some
Linear Models


Date: _____ Fixture: _____

QTY: _____ Project: _____

Thinline 4.5

Wall Mount Direct-Indirect

Cast End Caps with Light Block

Multiple Lens and Customizations Available

Architectural luminaire. Wall mounting. Slim contemporary design. Aluminum extruded body. Continuous runs available. L90 > 70K Hours. Designed and manufactured in North America. 10 Year Warranty.

Performance

Color Temp	Lm/W
4000K	120 Lm/W
3500K	116 Lm/W
3000K	112 Lm/W

Ordering Options

MODEL	CONTINUOUS RUN	DIR LUMENS	IND LUMENS	CRI	COLOR TEMP	VOLTAGE	DIRECT LENS	INDIRECT LENS
DTL WM DI 4.5	CR _____ - Min 2' - Available in 6" increments - Unibody, up to 8'	D 250 D 500 D 750 D 1000 D _____ Custom Up to 1200	I 250 I 500 I 750 I 1000 I _____ Custom Up to 1200	80 90	27K 2700K 3K 3000K 35K 3500K 4K 4000K 5K 5000K BIOS	U 120/277V H 347V	FR Frosted FRREG Frosted Regressed ASY Asymmetric .5" FR DROP 1.5" FR DROP	FR Frosted ASY Asymmetric BATWING

DTL WM DI 4.5								
---------------	--	--	--	--	--	--	--	--

FINISH	MOUNTING	DRIVER	CONTROLS	CIRCUITS
GRY Grey WH White BLK Black CU Custom	WM Wall Mount 12EX 12" Extended Arm	DIMOFF 0-10 1% DIMOFF Driver LUTRON Lutron Ecosystem Driver SR Philips SR DALI .1% ELDO LED Driver ELDO * 347 only in 1 - 10 5%	N None DMX SNS Philips SNS 300 w/ BLD & Daylight CLM Encelium CLM LG LG Dongle BT Bluetooth Mesh EN Enlighted Integral	1 One circuit

				1
--	--	--	--	---

ACCESSORIES	WIRING	DOWNLIGHT
N None 10kV 10kV Surge Protection EMBAT 6W 90 Min BAT	N None (Will provide 5 Leads from mounting plate)	DL# _____ POS _____ POS END MID BEG MULTIPLE

	N	
--	---	--

SAMPLE: DTL WM DI 4.5 - CR8 - D500 - 80 - 4K - U - FR - WH - WM - DIMOFF - N - 1 - N - N - 0

Available with BIOS® (please consult factory)
Specifications subject to change without notice.

Note: Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC qualified products list at www.designlights.org/qpl.

10YR
WARRANTY

LED

L90 > 70,000

Samsung 301 3 McAdam Binning


4000K 120 Lm/W

3500K 98%


3000K 96%

90 CRI 85%


Optics



Flat




0.25" Regressed



Asymmetric




0.5" Drop Lens




1.5" Drop Lens

Downlight

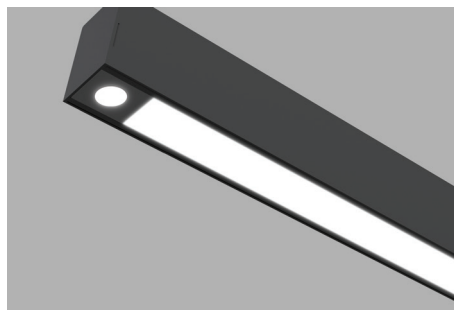

Start

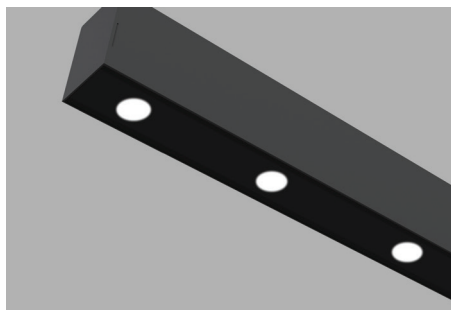


Multiple

Beam 60°


Lumens 50

Watts 4


Lens Options- Direct Distribution

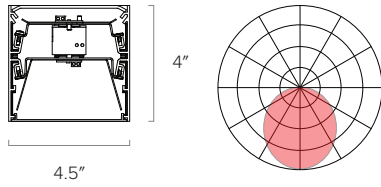


Standard
Frosted Flat

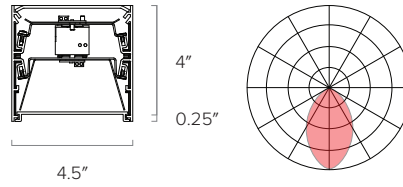


0.25"
Regressed Lens

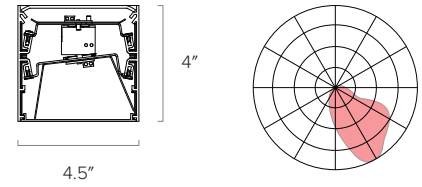

Asymmetric

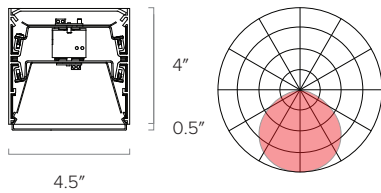


0.5" Drop Lens

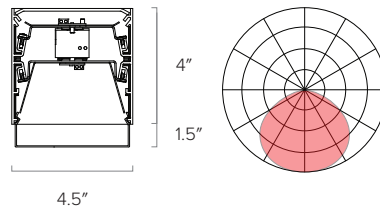


1.5" Drop Lens


Lens Options- Indirect Distribution

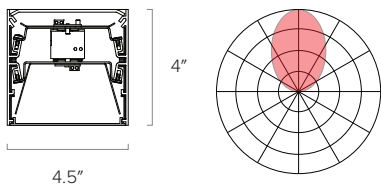

Indirect

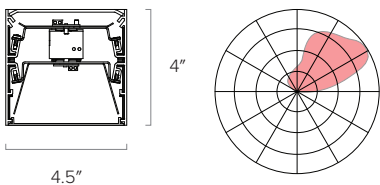


Asymmetric

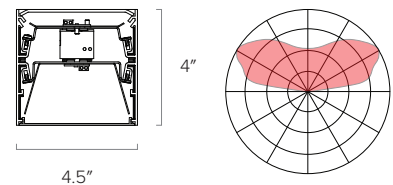


Batwing

Mounting





Wall Mount Bracket

Secure light fixture
using #8-32 screws (2x)

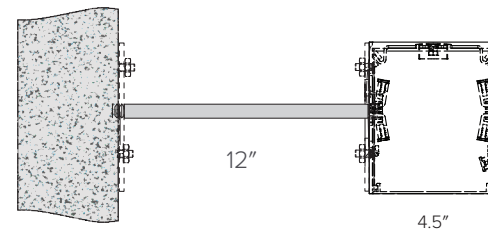



12" Extended Arm

Measurements



2': 24.2", 3': 36.2", 4': 48.2", 5': 60.2", 6': 72.2", 7': 84.2", 8': 96.2"

Actual Length = NOMINAL +.2"

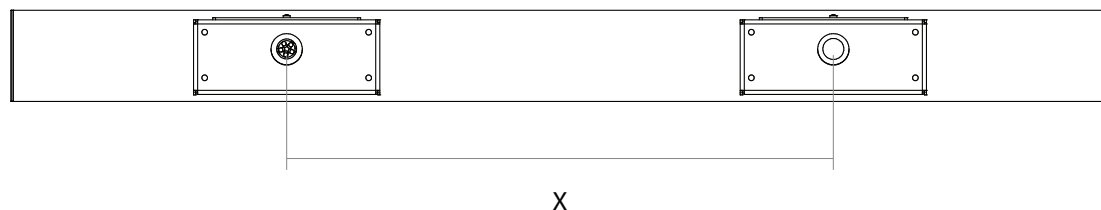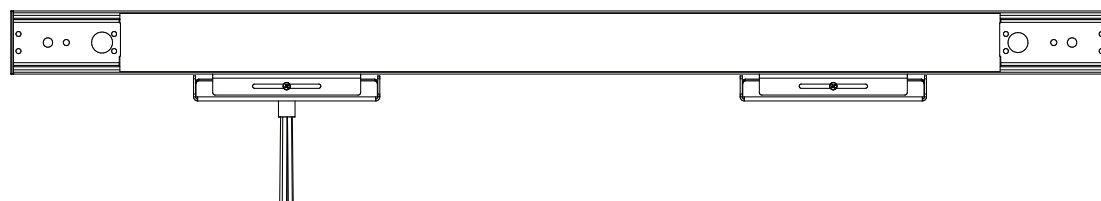


Mounting Location


Models	Mounting Lengths X
DTL 2	12"
DTL 3	18"
DTL 4	24"
DTL 5	30"
DTL 6	36"
DTL 7	42"
DTL 8	48"

Finishes


Standard Finishes



Delviro Grey
RAL 7046
Sandtex




Delviro White
RAL 9003
Sandtex




Delviro Black
RAL 9004
Sandtex


Custom Finishes




Delviro Orange
RAL 2009
Sandtex



Delviro Blue
RAL 5012
Sandtex



Delviro Yellow
RAL 1037
Sandtex



Delviro Green
RAL 6010
Sandtex

Additional Finishes Available - Please consult factory