

SPECIFICATION SHEET

SUBJECT

3.5" GIMBAL REGRESSED LED

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____

 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The 3.5" Bulls Eye Gimbal Regressed is the perfect solution for slope ceilings, highlight artwork and wall washing applications that features a 15 degree tilt, 360 degree rotation and a regressed design for anti-glare. This recessed luminaire is dimmable, IC and air tight rated, damp locations approved and Energy Star approved.



**3.5" GIMBAL
 REGRESSED
 LED LUMINAIRE**



SPECIFICATION FEATURES

Construction

Round fixture with integral LEDs
 Durable, die cast aluminum alloy for optimal heat dissipation with adjustable gimbal
 1 size: 3.5 inch

Controls

Isolated driver factory installed inside connection box

Electrical

Ambient temperature -20°C to 40°C
 CRI: 80
 120V dimmable/ 277-347V non-dimmable
 3000K and 4000K
 LED modules rated for greater than 50,000 hours
 12 Watt equivalent to 65 Watt halogen

Mounting

Cut hole in ceiling and snap fixture in opening with attached spring clips

Beam Angle

38° Beam with 15° tilt and 360° rotation

Finish


White
 Oil based spray painted
 Scratch resistant and smooth finish

Compliance

cETLus and Energy Star

Warranty

5 years

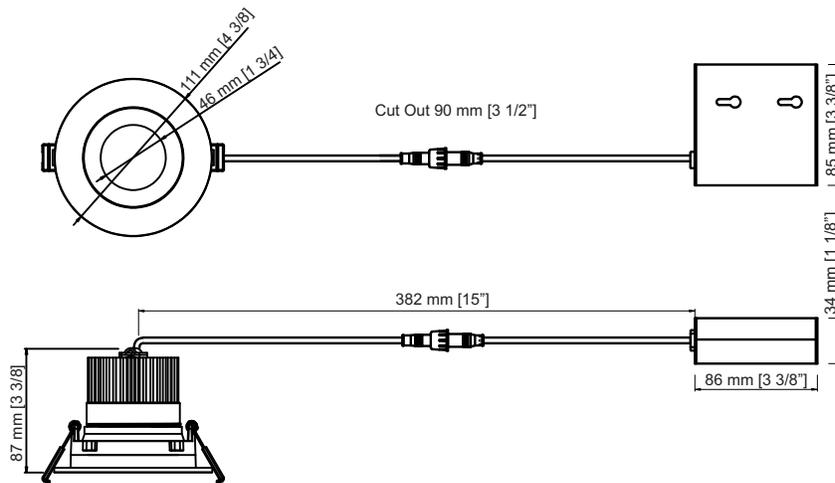

BERLED-3-S12W-3KWH-G/ BERLED-3-S12W-4KWH-G
Dimensions
 OD 4-3/8" (111mm) x ID 1-3/4" (46mm)
 Cut out 3-1/2" (90mm)
 Thickness 3-3/8" (87mm)





ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	BERLED-3-S12W-3KWH-G	800	12	120V	3000K		Standard
	BERED-3-S12W-4KWH-G	820	12	120V	4000K		Standard

NOTE:

- 120V dimmable
- Lumens are estimated

