

# SUBJECT SPECIFICATION SHEET

## Ceiling Light Porthole M

### CUSTOMER PROJECT

Project: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Cat. No.: \_\_\_\_\_  
 Qty: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 EEL Rep: \_\_\_\_\_



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

### DESCRIPTION

The Ceiling Light Porthole M fixture features a brushed nickel finish and a white polycarbonate diffuser. It is perfect for commercial and residential applications. Ideal for hallways, kitchens and bedrooms.

### SPECIFICATION FEATURES

#### Construction

- Efficient heat dissipating metal plate
- High Transmittance PS Lens
- Brushed nickel trim
- Available in 14"

#### Mounting

- Surface Mount

#### Finish

- Brushed nickel

#### Compliance

- Energy Star
- ETL
- FCC rated
- T24 rated
- Suitable for damp locations

#### Warranty

- 5-Year Warranty (Standard)
- 10-Year Limited Warranty (Optional)





## Ceiling Light Porthole

### M SERIES



Wattage(s)	26W
Voltage	120V
Dimmable	Triac Dimmable
CCT	3CCT-B (3000K, 4000K, 5000K)
CRI	90+
Lumen Maintenance	L70 = 30,000h
Operating Temperature	-20°C to 40°C
Beam Angle	115°
PF	>0.9

### ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	CRI	Efficacy (lm/W)	Certification
 <b>CLPM-537R14BN</b> 26W120V-3CCTB-Triac-CRI90	1820	26W	120V	3CCT-B (3000K, 4000K, 5000K)	90+	70	

#### NOTE:

- Special-Order: CLPM 10.3" & 18"
- Lumens are estimated

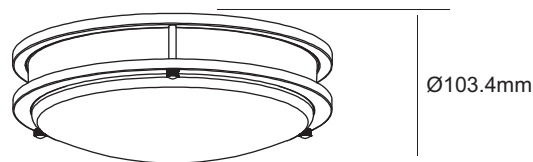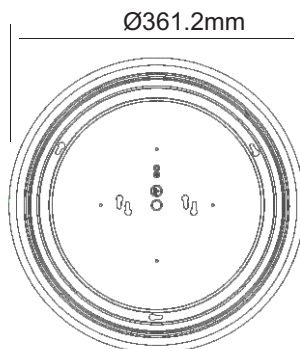

www.eelighting.ca