

## SPECIFICATION SHEET

### SUBJECT

### LED EMERGENCY LIGHT

### CUSTOMER PROJECT

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Cat. No.: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Date: \_\_\_\_\_  
EEL Rep: \_\_\_\_\_



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

### DESCRIPTION

This model has 2 remote emergency light heads which are constructed of high impact thermoplastic. Clear PC lens and aluminum reflector provide bright illumination. Adjustable swivel locks the lamp head position.

### SPECIFICATION FEATURES

#### Construction

Injection-moulded thermoplastic ABS housing  
UL94V-0 flame rating  
Clear PC lens and aluminum reflector provides bright illumination  
Suitable for wall mounting and ceiling mounting  
Standard canopy is designed to mount directly to typical electrical junction boxes

#### Finish

White

#### Compliance

CSA listed and meets all requirements in C22.2  
No. 141-10

#### Warranty


2 years

#### Electrical

DC5V - DC12V Input Voltage  
SMD 2W high power LED, CCT 6000K for emergency lamp heads  
Ambient temperature 5°C to 30°C  
Suitable for damp locations



**CM SERIES  
REMOTE  
EMERGENCY  
LIGHT HEAD  
(2 LAMP HEADS)**

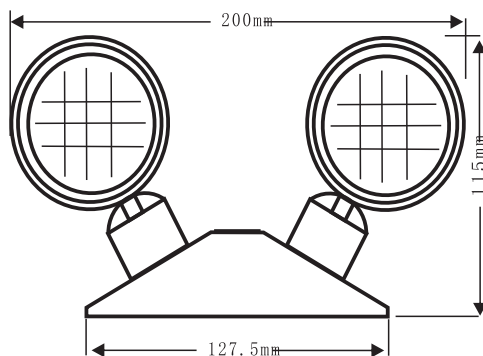

**CM202A**  
**Dimensions**  
mm | 128(Ø) x 200(W) x 115(H)  
inch | 5(Ø) x 7.9(W) x 4.5(H)





## ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Voltage (V)	Lamp Head	Lumen Output	Certification	Type
 CM202A	DC5V-DC12V	2W x 2	180 lm		Standard

## PHOTOMETRICS

### Luminous intensity distribution

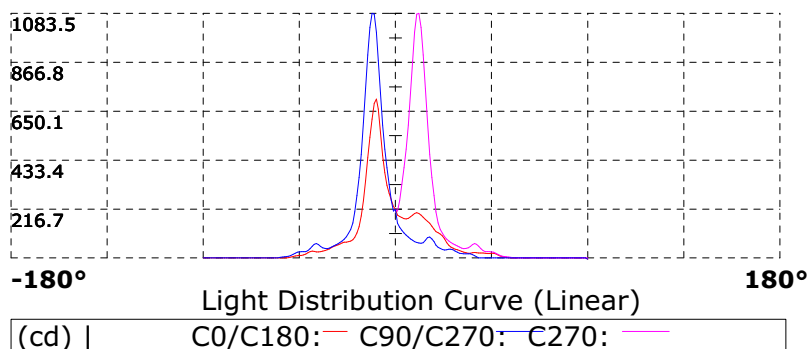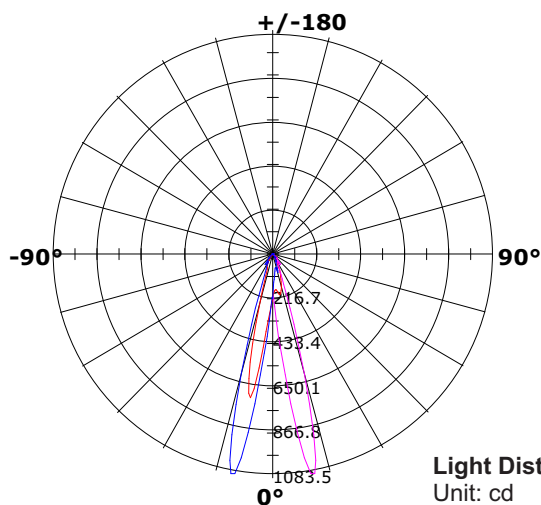

Light Distribution Curve  
Unit: cd

Height	Center lx	Diameter
1.m	215.90 lx	34.91cm
2.m	53.98 lx	69.81cm
3.m	23.99 lx	104.72cm
4.m	13.49 lx	139.62cm
5.m	8.64 lx	174.53cm
6.m	6.00 lx	209.43cm
7.m	4.41 lx	244.34cm
8.m	3.37 lx	279.24cm
9.m	2.67 lx	314.15cm
10.m	2.16 lx	349.06cm
11.m	1.78 lx	383.96cm
12.m	1.50 lx	418.87cm
13.m	1.28 lx	453.77cm
14.m	1.10 lx	488.68cm
15.m	0.96 lx	523.58cm
16.m	0.84 lx	558.49cm

Lux Distance Curve  
Beam angle: 19.80° (50% Imax)