

PR332347



Ballast Type:	Electronic	Starting Method:	Rapid Start
Lamp Connection:	Series	Input Voltage:	347
Input Frequency:	50/60 Hz	Sound Rating:	A
Remote Mounting:	18 ft Maximum	Warranty:	One Year
End-of-Life Protection:	No	Max. Case Temperature:	70°C

ELECTRICAL SPECIFICATIONS

Lamp Type	# of Lamps	Rated Lamp Watts	Min. Start Temp. (°F/°C)	Input Current (Amps)	Input Power (Watts)	Ballast Factor	Max THD %	Power Factor	Max L.C.C.F.	B.E.F	
F32T8	3	32	32 / 0	0.26	91	0.88	10	0.99	1.70	0.97	
	2			0.21	69	1.05				1.52	
F32T8/ES (30W)	3	30	60 / 16	0.25	85	0.88				1.04	
	2			0.19	63	1.05				1.67	
F32T8/ES (28W)	3	28		0.23	79	0.88				1.11	
	2			0.18	60	1.05				1.75	
F32T8/ES (25W)	3	25		0.22	74	0.88				1.19	
	2			0.17	55	1.05				1.91	
F25T8	3	25		32 / 0	0.22	77				0.92	1.19
	2				0.17	56				1.10	1.96
F17T8	3	17	0.18		61	1.00				1.64	
	2		0.13		42	1.15				2.74	

REGULATORY COMPLIANCE


- Meets ANSI Standard C82.11
- Meets ANSI Standard C62.41
- Meets FCC Part 18 Class A for EMI & RFI (Non-Consumer Limits)
- No PCB's

- cULus Listed (Class P, Type 1 Outdoor, Type HL)
- RoHS Compliant



PHYSICAL CHARACTERISTICS

WIRING DIAGRAM

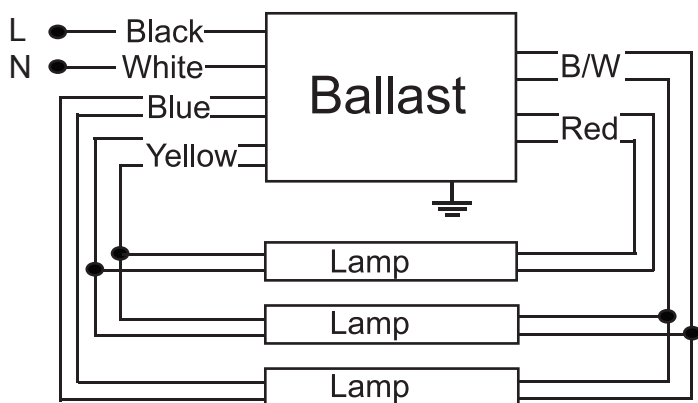


LEAD LENGTH

Wire	in
Black	18
White	18
Blue	31
Red	31
Yellow	46
Blue/White	31

CASE DIMENSIONS

Overall (L)	9.50"	241.0 mm
Width (W)	1.72"	43.8 mm
Height (H)	1.18"	30.0 mm
Mounting (M)	8.90"	226.0 mm

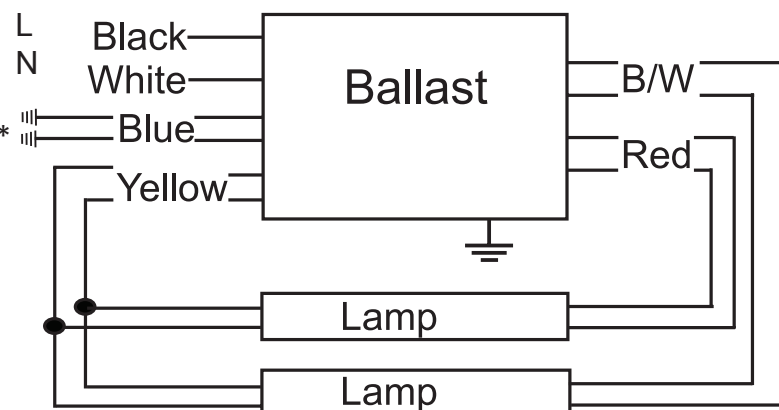

*Cap off each blue wire separately

ORDERING INFORMATION

Model #	Carton Weight	Carton Dimensions LxWxH	Carton Quantity	Skid Quantity
PR332347	30.8 lbs	11.0" x 10.6" x 9.1"	20	960