

SPECIFICATION SHEET

SUBJECT

LUX RECESSED BAFFLE

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____

 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The LUX LED Recessed Light Baffle Luminaire fits anywhere you need for general light source. No recessed fixture required. It has a baffle style that gently softens light for great illumination. Available in 3000K and 4000K. TRIAC dimmable, IC air tight rated. Energy Star approved. Suitable for damp locations and insulated ceiling applications.

SPECIFICATION FEATURES

Construction

Round, baffle designed fixture with integral LEDs. Glare controlling lens provides comfortable light distribution.

Controls

Isolated driver factory installed inside connection box

Electrical

Ambient temperature -20°C to 40°C
 CRI:80
 IC-Rated
 120V dimmable
 6 Watt equivalent to 35 Watt halogen
 9 Watt equivalent to 50 Watt halogen
 12 Watt equivalent to 65 Watt halogen

Mounting

Ceiling Recess Mount. Includes two spring loaded clips to affix to any ceiling material. Cut hole in ceiling and snap fixture in opening with attached spring clips. Clearance needed - 2" (50mm).

Beam Angle

120°

Finish

White

Compliance


cETLus and Energy Star

Warranty

5 years, 50,000+ hours



**LED RECESSED
 BAFFLE LUMINAIRE**

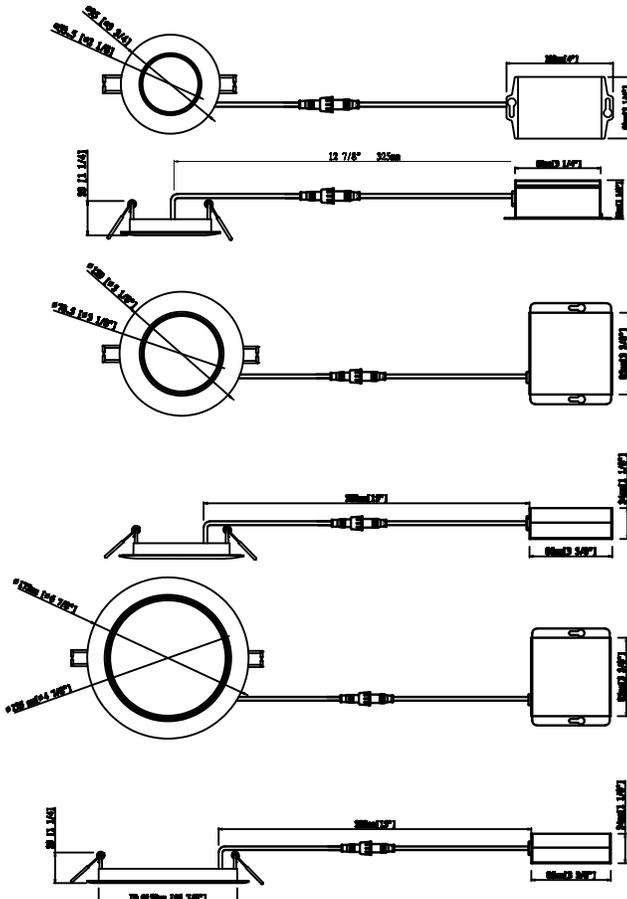

RLBLED-3-S6W

Dimensions

OD 3-3/4" (95mm) x ID 2-3/4" (71mm)
 Cut out 3" (75mm)
 Thickness 1-1/4" (33mm)

RLBLED-4-S9W

Dimensions

OD 5-1/8" (129mm) x ID 4" (102mm)
 Cut out 4-1/8" (105mm)
 Thickness 1-1/4" (33mm)

RLBLED-6-S12W

Dimensions

OD 6-7/8" (175mm) x ID 5-7/8" (150mm)
 Cut out 6-1/8" (155mm)
 Thickness 1-1/4" (33mm)





ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	RLBLED-3-S6W-3KWH	360	6	120	3000K		Standard
	RLBLED-3-S6W-4KWH	400	6	120	4000K		Standard
	RLBLED-4-S9W-3KWH	550	9	120	3000K		Standard
	RLBLED-4-S9W-4KWH	600	9	120	4000K		Standard
	RLBLED-6-S12W-3KWH	700	12	120	3000K		Standard
	RLBLED-6-S12W-4KWH	800	12	120	4000K		Standard

NOTE:
 • Lumens are estimated

OPTIONAL ACCESSORIES

- UTLED-3-GOOF RING | Goof Ring for 3" UltraThin
- UTLED-4-GOOF RING | Goof Ring for 4" UltraThin
- UTLED-6-GOOF RING | Goof Ring for 6" UltraThin

