

## SPECIFICATION SHEET

### SUBJECT

LED SILHOUETTE WRAPAROUND LUMINAIRE

**EELighting**



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

### CUSTOMER PROJECT

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Cat. No.: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Date: \_\_\_\_\_  
EEL Rep: \_\_\_\_\_

### DESCRIPTION

The LED Silhouette Wraparound is ideal for surface and chain hung general illumination luminaire for light commercial and residential applications. The high efficiency LED light engine provides exceptional performance coupled with quality visual light.

### SPECIFICATION FEATURES

#### Construction

Die formed 22 gauge galvanized steel painted high gloss white finish

#### Electrical

Long life LED system complete with 0-10V dimmable electrical driver to deliver the optimal performance LED's available in 4000K with a typical CRI: 80  
Ambient temperature -30°C to 40°C  
LED Modules rated for 50,000 hours  
Electronic drivers are available in 120-277 and 347 Volt applications

#### Driver and Module Access

Drivers can be accessed by removing the lens and then the driver cover

#### Mounting

Surface mount and suspension mount (V-hooks is supplied)  
No knockout at the end of fixture.

#### Finish

22 gauge galvanized steel and high gloss enamel paint finish ensures maximum bonding and rust inhibition.  
End caps are made of polycarbonate (PC).

#### Shielding

Frosted PC LED lens offers visual comfort

#### Compliance


Modules and Drivers are UL recognized components and indoor luminaires are cULus listed

#### Warranty

5 years



**SILHOUETTE  
LED WRAPAROUND**

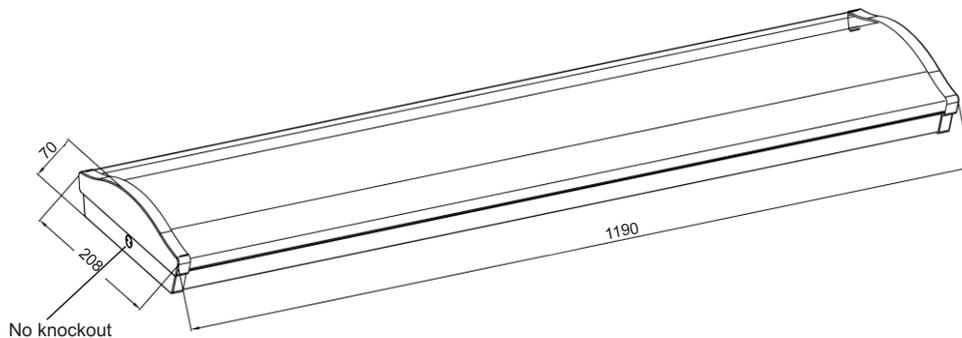

SPW4-45LED04

#### Dimensions

mm | 1190(L) x 208(W) x 70(H)  
inch | 46.9(L) x 8.2(W) x 2.8(H)





### ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification	Type
	SPW4-45LED04	6250	50	120-277 or 347	4000K	125		Standard

**NOTE:**  
Lumens are estimated

#### OPTIONAL ACCESSORIES

ULT - HC419S | On-Off Sensor Control | 120-277V  
ULT - HC419V | Tri-level Dimming Control | 120-277V

#### EMERGENCY BACK-UP (OPTIONAL)

EMLEDS10155564 | LED Emergency Pack 120-277V

