

SPECIFICATION SHEET

SUBJECT

ULTRATHIN JUNIOR ROUND

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____

 Qty: _____
 Date: _____
 EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The UltraThin Junior Recessed Luminaire is an economical version of the EEL UltraThin. This recessed luminaire fits where no other recessed fixture can. It features a LED module that maintains uniform intensity. Available in 3000K and 4000K. TRIAC dimmable, IC air tight rated. Energy Star approved. Suitable for damp locations and insulated ceiling applications.

SPECIFICATION FEATURES

Construction

Round fixture with integral LEDs. Durable body with etched white polycarbonate diffuser lens for low glare.

Controls

Isolated driver factory installed inside connection box

Electrical

Ambient temperature -20°C to 40°C
 CRI:80
 IC-Rated
 120V dimmable
 9 Watt equivalent to 50 Watt halogen
 12 Watt equivalent to 65 Watt halogen

Mounting

Ceiling Recess Mount. Includes two spring loaded clips to affix to any ceiling material. Cut hole in ceiling and snap fixture in opening with attached spring clips. Cutout of 108mm (4 1/4") required for the 4 inch model and 158mm (6 1/4") required for the 6 inch model. Clearance needed - 2" (50mm).

Beam Angle

120°

Finish

White

Compliance


cETLus and Energy Star

Warranty

3 years




**ULTRATHIN JUNIOR
 LED RECESSED
 LUMINAIRE**

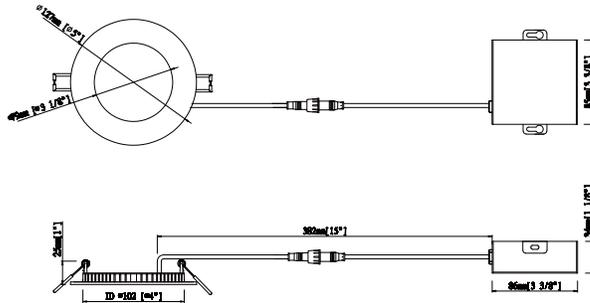

UJLED-4-S9W

Dimensions
 OD 5" (127mm) x ID 4" (102mm)
 Cut out 4-1/4" (108mm)
 Thickness 1" (25mm)

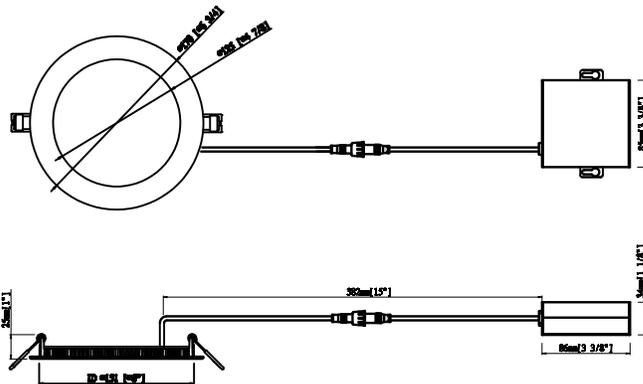

UJLED-6-S12

Dimensions
 OD 6-3/4" (170mm) x ID 6" (151mm)
 Cut out 6-1/4" (158mm)
 Thickness 1" (25mm)





ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	UJLED-4-S9W-3KWH	550	9	120	3000K		Standard
	UJLED-4-S9W-4KWH White	600	9	120	4000K		Standard
	UJLED-6-S12W-3KWH	700	12	120	3000K		Standard
	UJLED-6-S12W-4KWH White	800	12	120	4000K		Standard

NOTE:
 • Lumens are estimated

OPTIONAL ACCESSORIES

- UTLED-4-MP | Mounting Plate for 4" UltraThin
- UTLED-6-MP | Mounting Plate for 6" UltraThin
- UTLED-JC-10 | Extension Cable 10ft for UltraThin
- UTLED-JC-20 | Extension Cable 20ft for UltraThin
- TRIM4BK | Face Plate in Black for 4" UltraThin
- TRIM4BN | Face Plate in Brushed Nickel for 4" UltraThin
- TRIM4CP | Face Plate in Copper for 4" UltraThin
- TRIM6BK | Face Plate in Black for 6" UltraThin
- TRIM6BN | Face Plate in Brushed Nickel for 6" UltraThin
- TRIM6CP | Face Plate in Copper for 6" UltraThin
- UTLED-4-GOOF RING | Goof Ring for 4" UltraThin
- UTLED-6-GOOF RING | Goof Ring for 6" UltraThin

SHIPPING DATA

Model No.	Gross Weight
UJLED-4-S9W	0.31 kg / 0.68 lbs
UJLED-6-S12W	0.39 kg / 0.86 lbs