

SPECIFICATION SHEET

SUBJECT

ULTRATHIN LED RECESSED LUMINAIRE

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The UltraThin Recessed Luminaire, stands apart from other fixtures of its type by providing a continual family line of products. No pot housing required and can be installed easily anywhere along a ceiling. This original family member is airtight, wet location approved and Energy Star rated. Comes in several sizes, two shapes, various colours and also accommodates UltraThin, colour changing face plates.



ULTRATHIN 3" LED RECESSED LUMINAIRE

SPECIFICATION FEATURES

Construction

- Round 3" fixture with integral LEDs

Controls

- Isolated driver factory installed inside connection box

Electrical

- Ambient temperature -40°C to 40°C
- CRI:80
- IC-rated
- 120 Volt
- 6 Watt equivalent to 35 Watt halogen
- Triac Dimmable (120V)

cULus 600V Push-in wire connectors, rated for 12-18 AWG Solid/Stranded wires

One Time Use Only – Do Not Reuse (reusing the connector may lead to poor contact and cause the fixture to flicker)

Beam Angle

- 120°

Mounting

- Cut hole in ceiling by using the template provided and snap fixture in opening with attached spring clips. Clearance needed - 2" (50mm).

Shielding

- Diffused lens

Finish


- Standard - White
- Special Order - Brushed Nickel and Black

Compliance

- cETLus
- Energy Star

Warranty

- 5-Year Warranty
- 50,000+ hours

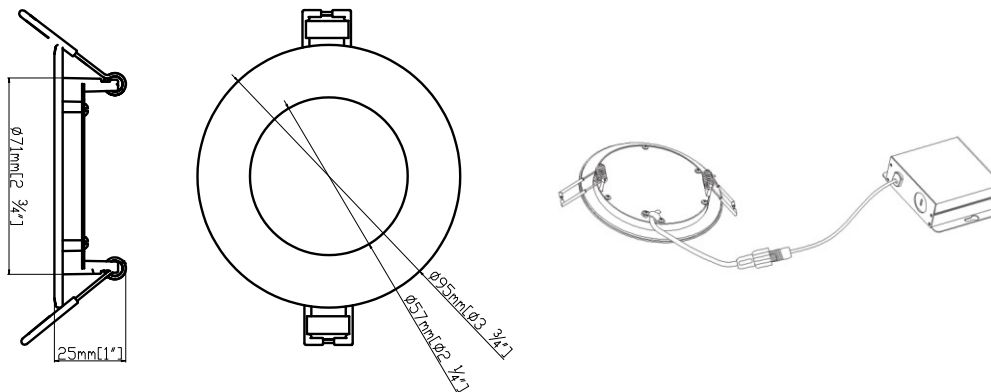



UTLED-3-S6W-3KWH
UTLED-3-S6W-4KWH

Dimensions

OD 3-3/4" (95mm) x ID 2-3/4" (71mm)
Cut out 3" (75mm)
Thickness 1" (25mm)



ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification
	UTLED-3-S6W-3KWH	360	6	120	3000K	
	UTLED-3-S6W-4KWH	400	6	120	4000K	
	White					

NOTE:

Lumens are estimated
Energy Star certification applies to 120V only

SHIPPING DATA

Model No.	Gross Weight
UTLED-3-S6W-3KWH	0.31 kg / 0.69 lbs
UTLED-3-S6W-4KWH	0.31 kg / 0.69 lbs

OPTIONAL ACCESSORIES

UTLED-JC-10 | 10' Extension Cable for UltraThin
UTLED-JC-20 | 20' Extension Cable for UltraThin
UTLED-3-MP | Mounting Plate for 3" UltraThin
UTLED-3-GOOF RING | Goof Ring for 3" UltraThin
TRIM3BK | Face Plate in Black for 3" UltraThin
TRIM3BN | Face Plate in Brushed Nickel for 3" UltraThin
TRIM3CP | Face Plate in Copper for 3" UltraThin

