

## SPECIFICATION SHEET

### SUBJECT

### LED ULTRATHIN GIMBAL

### CUSTOMER PROJECT

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Cat. No.: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Date: \_\_\_\_\_  
EEL Rep: \_\_\_\_\_



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

### DESCRIPTION

The UltraThin 3" recessed adjustable Gimbal is the perfect solution for slope ceilings and wall washing applications that features a 15 degree tilt. The recessed LED slim luminaire is dimmable, Non-IC, damp location and Energy Star approved. For Indoor use only.



### ULTRATHIN GIMBAL 3" LED RECESSED LUMINAIRE

### SPECIFICATION FEATURES

#### Construction

Round 3" fixture with integral LEDs  
15 degrees tilt

#### Controls

Isolated driver factory installed inside connection box

#### Electrical

Ambient temperature -40°C to 40°C. CRI:80. 120 Volt.  
6 Watt equivalent to 35 Watt halogen

#### Mounting

Cut hole in ceiling by using the template provided and snap fixture in opening with attached spring clips.  
Clearance needed - 2" (50mm)

#### Beam Angle

120°

#### Shielding

Diffused lens

#### Finish


White (WH)  
Optional Brushed Nickel (BN) and Black (BK)

#### Compliance

cETLus and Energy Star

#### Warranty

5 years, 50,000+ hours

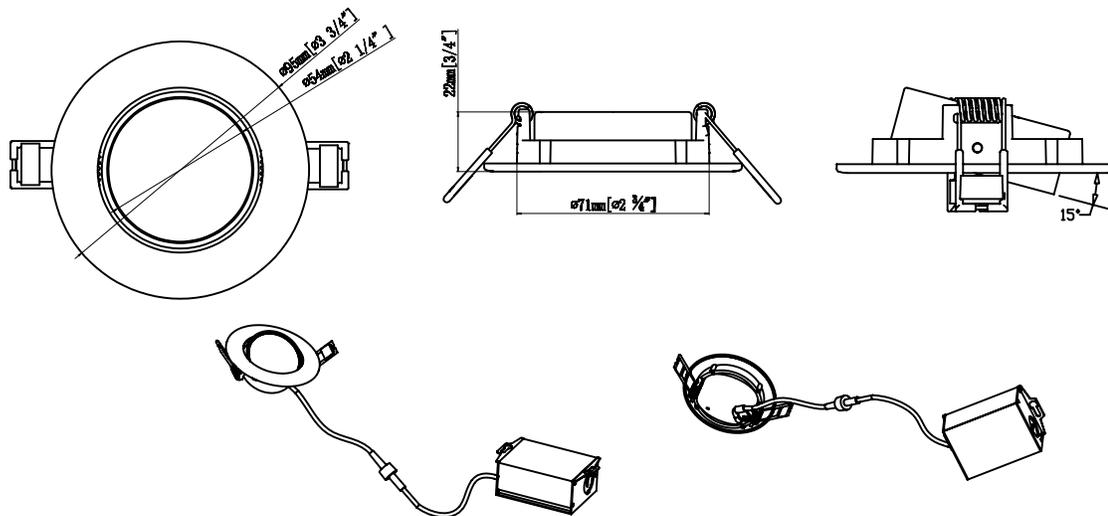

UTLED-3-S6W-3KWH-G  
UTLED-3-S6W-4KWH-G

#### Dimensions

OD 3-3/4" (95mm) x ID 2-3/4" (71mm)  
Cut out 3" (78mm)  
Thickness 3/4" (22mm)





**ORDERING CODE, ENERGY AND PERFORMANCE DATA**

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	UTLED-3-S6W-3KWH-G	360	6	120	3000K		Special Order
	UTLED-3-S6W-4KWH-G	400	6	120	4000K		
	White						

**NOTE:**  
Lumens are estimated  
Energy Star certification applies to 120V only

**SHIPPING DATA**

Model No.	Gross Weight
UTLED-3-S6W-3KWH-G	0.34 kg / 0.76 lbs
UTLED-3-S6W-4KWH-G	0.34 kg / 0.76 lbs

**OPTIONAL ACCESSORIES**

- UTLED-JC-10 | Extension Cable 10ft for UltraThin models
- UTLED-JC-20 | Extension Cable 20ft for UltraThin models

