

## SPECIFICATION SHEET

### SUBJECT

### ULTRATHIN LED RECESSED LUMINAIRE

### CUSTOMER PROJECT

Project: \_\_\_\_\_  
Type: \_\_\_\_\_  
Cat. No.: \_\_\_\_\_  
Qty: \_\_\_\_\_  
Date: \_\_\_\_\_  
EEL Rep: \_\_\_\_\_



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872



### DESCRIPTION

The UltraThin 3" Recessed Luminaire fits where no other recessed fixture can. This recessed luminaire is dimmable, IC air tight rated, wet location approved and Energy Star rated.

### SPECIFICATION FEATURES

#### Construction

Round 3" fixture with integral LEDs

#### Controls

Isolated driver factory installed inside connection box

#### Electrical

Ambient temperature -40°C to 40°C. CRI:80. IC-rated. 120 Volt. 6 Watt equivalent to 35 Watt halogen.

#### Mounting

Cut hole in ceiling by using the template provided and snap fixture in opening with attached spring clips. Clearance needed - 2" (50mm).

#### Beam Angle

120°

#### Shielding

Diffused lens

#### Finish

Standard - White  
Special Order - Brushed Nickel and Black

#### Compliance


cETLus and Energy Star

#### Warranty

5 years, 50,000+ hours



ULTRATHIN  
3" LED RECESSED  
LUMINAIRE

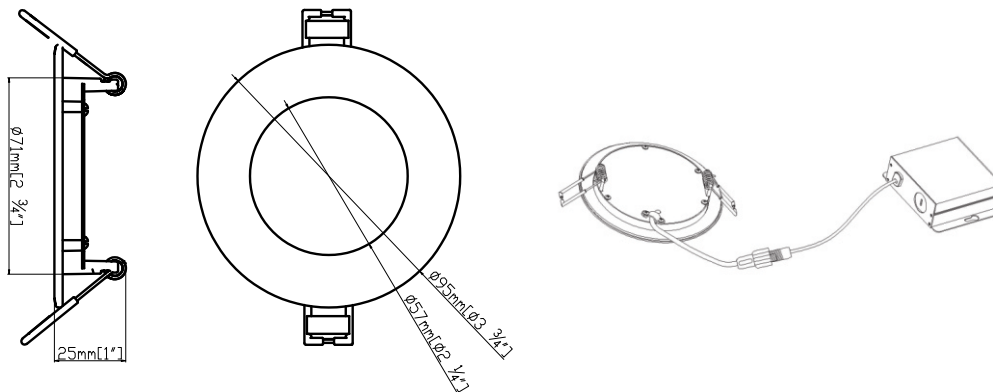

UTLED-3-S6W-3KWH  
UTLED-3-S6W-4KWH

#### Dimensions

OD 3-3/4" (95mm) x ID 2-3/4" (71mm)  
Cut out 3" (75mm)  
Thickness 1" (25mm)





www.eelighting.ca

EELSS19W07



## ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	UTLED-3-S6W-3KWH	360	6	120	3000K		Standard
	UTLED-3-S6W-4KWH	400	6	120	4000K		Standard
	White						

### NOTE:

Lumens are estimated  
Energy Star certification applies to 120V only

### SHIPPING DATA

#### Model No.

UTLED-3-S6W-3KWH  
UTLED-3-S6W-4KWH

#### Gross Weight

0.31 kg / 0.69 lbs  
0.31 kg / 0.69 lbs

### OPTIONAL ACCESSORIES

UTLED-JC-10 | 10' Extension Cable for UltraThin  
UTLED-JC-20 | 20' Extension Cable for UltraThin  
UTLED-3-MP | Mounting Plate for 3" UltraThin  
UTLED-3-GOOF RING | Goof Ring for 3" UltraThin

