

SPECIFICATION SHEET

SUBJECT

LED WALL SCONES

CUSTOMER PROJECT

Project: _____
Type: _____
Cat. No.: _____
Qty: _____
Date: _____
EEL Rep: _____



solutions closer to nature

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The LED Wall Sconce Collection from EEL is a work of modern art. The WS-P2028-LED Wall Sconce is created with a brushed nickel base and topped with a frosted glass lens. The compact, sleek Wall Sconce is the perfect fixture to contemporize any hallway.

SPECIFICATION FEATURES

Construction

Formed fixture pan with access holes to junction box
Aluminum LED module tray directs heat away from electronic components

Electrical

Long life LED System complete with built in Driver to deliver the optimal performance
LED's available in 3000K with a typical CRI: 80
Ambient temperature -40°C to 40°C
Projected life is 50,000 hours

Driver and Module Access

Remove glass to access Driver and Modules

Mounting

Surface Mount

Finish

Brushed Nickel

Shielding

Smooth White Glass

Compliance



cETLus and Energy Star

Warranty

5 years



**LED
WALL SCONCE
WS-P2028-LED**

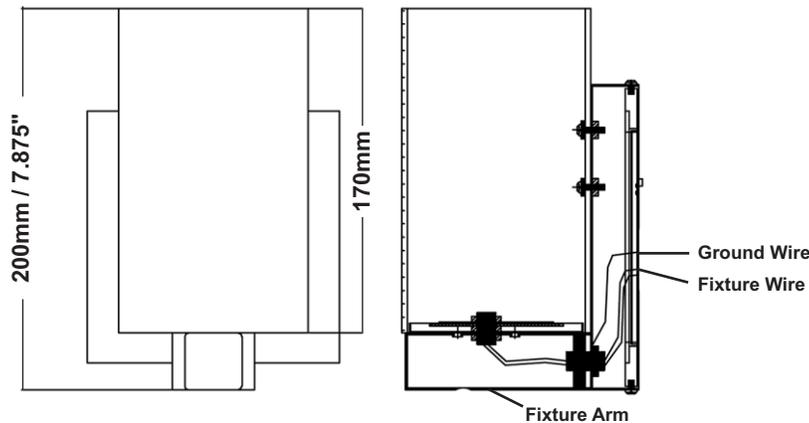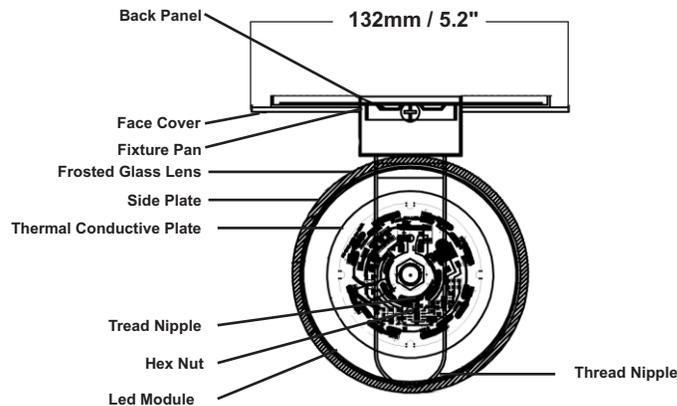

**WS-P2028-LED
Dimensions**
mm | 200(L) x 132(W) x 127(D)
inch | 7.9(L) x 5.2(W) x 5(D)





ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification	Type
	WS-P2028-LED Dimmable - End of Life -	600	8	120	3000K	75		Standard

NOTE:
Lumens are Estimated

SHIPPING DATA
Model No.
WS-P2028-LED

Weight
0.8kg /1.76lbs