

SPECIFICATION SHEET

SUBJECT

BULLS EYE - BE50

CUSTOMER PROJECT

Project: _____
 Type: _____
 Cat. No.: _____
 Qty: _____
 Date: _____
 EEL Rep: _____



BE50
 BULLS EYE

**3" and 4" GIMBAL
 LED RECESSED
 LUMINAIRE**

BULLS EYE SERIES

BE50

Wattage(s) 8W, 14W

Voltage 120V

Dimmable Triac

CCT 3000K

CRI 90

Operating Temperature -20°C to 35°C

Lumen Maintenance Theoretical
 L70 > 50,000h

PF >0.7



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The BE50 is a recessed gimbal luminaire within our popular BullsEye series. Like the Original series, this recessed luminaire is triac dimmable and IC air tight rated.

Where it stands apart is with a CRI of 90 plus a wet-location rating. This is in addition to its UL and EnergyStar certifications. With a DC connector, longer cord, 4 knock-outs, a larger driver box, and the included cULus 600V push-in wire connectors - this fixture is a breeze to wire and install.

The BE50 is ideal for interior, accent, wall wash and sloped ceiling applications.

SPECIFICATION FEATURES

Construction

- Round fixture with integral LEDs
- Durable, die cast aluminum alloy for optimal heat dissipation
- Polycarbonate lens

Controls

- Isolated driver installed inside connection box

Mounting

- Recessed mount

Finish

- Matte White
- Scratch resistant and smooth finish

Beam Angle

- 38° Beam with 30° tilt
- 360° rotation





Compliance

- Energy Star
- IC-Rated
- Suitable for wet location
- FCC Rated (Part 15 Subpart B)
- cUL
- The basic standard used to investigate products that are UL 1598 ("Luminaires") certified, also conforms to CSA-C22.2 No. 250.0 ("Luminaires").

Warranty

- 5-Year Warranty (Standard)
- 10-Year Limited Warranty (Optional)

ORDERING CODE, ENERGY AND PERFORMANCE DATA

Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification
 BE50-R3313 Matte White 8W30K-120V-Triac-CRI90	600	8W	120V	3000K	75	
 BE50-R4713 Matte White 14W30K-120V-Triac-CRI90	1050	14W	120V	3000K	75	

NOTE:

- 120V dimmable
- Lumens are estimated

OPTIONAL ACCESSORIES

UTLED-3-GOOF RING | Goof Ring for 3" UltraThin
 UTLED-4-GOOF RING | Goof Ring for 4" UltraThin
 UTLED-3-MP | 3" Mounting Plate for 3" BE50
 UTLED-4-MP | 4" Mounting Plate for 4" BE50
 UTLED-4-MP-S | 4" Mounting Plate (short) for 4" BE50

ACCESSORIES INCLUDED


cULus 600V Push-in Wire Connectors



Cut-Out Dimensions

Model	Cut-Out (Inches)	Cut-Out (mm)
BE50-R3313	3"	76mm
BE50-R4713	4 3/8"	112mm

BE50 - 3"

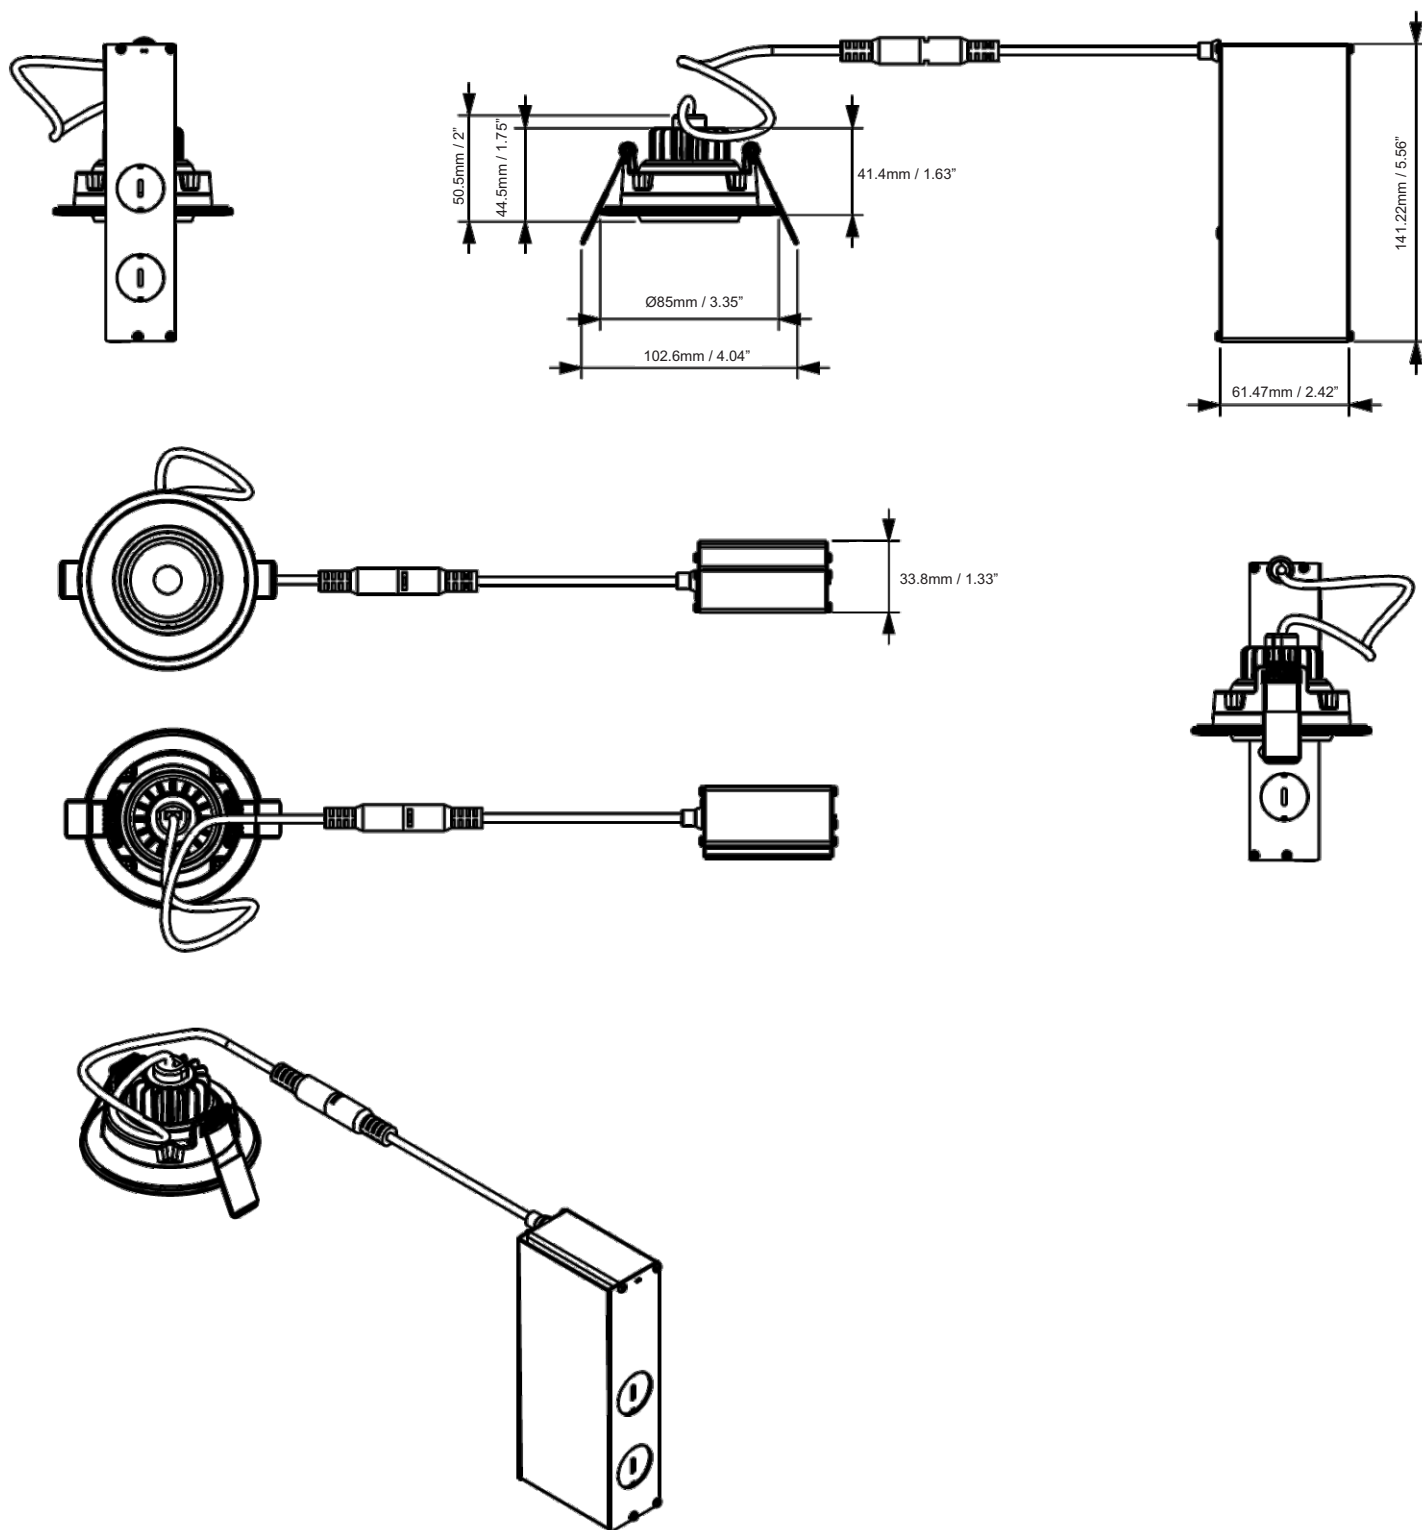

BE50 - 4"

