



SURFACE MOUNTED DOWNLIGHT | DISCUS RUDI 2



FORM FACTOR

- 5"
- 7"
- 9"
- 12"

WATTAGE

- 11W (5")
- 14W (7")
- 20W (9")
- 25W (12")

VOLTAGE

120V

CCT

- 2700-3000-3500-4000-5000K

Selectable from 5 temperatures
Toggle Default: 2700K

DIMMABLE

Triac

EFFICACY

up to 74lm/W

CRI

90

BEAM ANGLE

120°

OPERATING TEMPERATURE

-20°C to 40°C

LUMEN MAINTENANCE

- Theoretical L70 at 55°C
>74,400 hrs
- Lumen Maintenance at
36,000hrs at 55°C = 84.5%

POWER FACTOR

>0.9

THD Total Harmonic Distortion

<60%



PROJECT _____

QTY _____

TYPE _____

DATE _____

CATEGORY # _____

EELIGHTING REP _____

The Discus Rudi 2 (DR2) is a CCT-selectable surface mounted luminaire. Beneath its low-profile and slim frame is an edge-lit LED design powered by DOB (driver on board) technology.

Select from five colour temperatures to meet application needs with a simple toggle switch. And installation is a literal cinch with two discrete fixation clips located on the edge of the frame. The DR2 series is simple, reliable performance; designed for efficiency and well suited for residential or commercial applications requiring clean lines.



Visit the product
page online to view
the Product Gallery
and Applications Gallery



FINISH

- white powder-coated frame

WARRANTY

- 5-Year Warranty (Standard)
- 10-Year Limited Warranty (Optional)

CONSTRUCTION

- polycarbonate housing
- frosted polycarbonate lens
- slim frame design (0.4", 11mm bezel)
- toggle switch for selectable CCT (located on the back of luminaire)
- driver on board

CERTIFICATION & COMPLIANCE

- cETLus
- FCC
- suitable for damp locations






MOUNTING


- surface mount
- wall mount

DIMENSIONS


DR2-R5 (5") Models

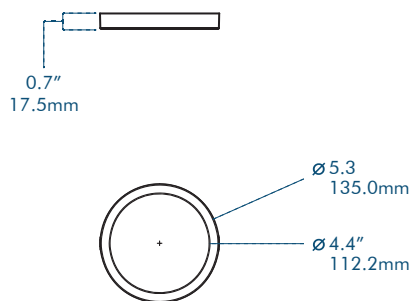


DR2-R7 (7") Models

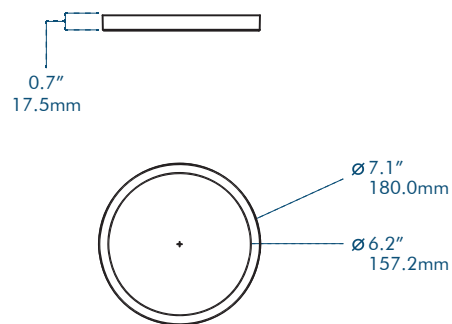

DR2-R9 (9") Models

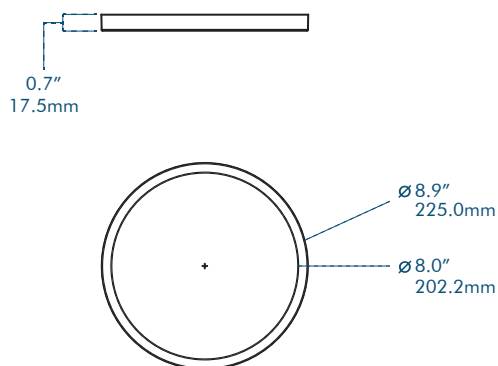

DR2-R12 (12") Models

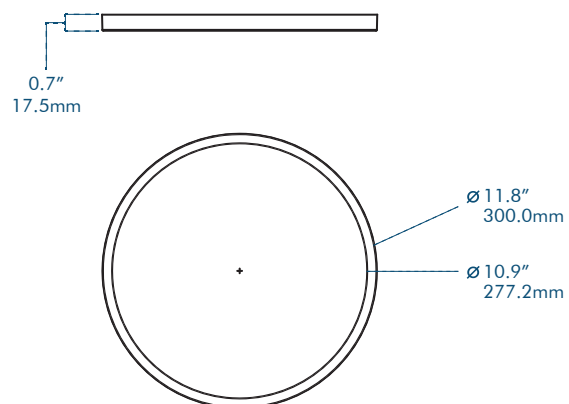



SURFACE MOUNTED DOWNLIGHT | DISCUS RUDI 2



ORDERING GUIDE

Example Model# (MPN Prefix): **DR2-R5383MW**

Make it Easy: Use our online configurator

SERIES	FORM FACTOR	WATTAGE	CCT	VOLTAGE	FINISH
DR2	R5 Round 5"	3 11W	8 5CCT-A 2700-3000-3500-4000-5000K Models in this series are 5CCT CCT-Selectable between 5 outputs. The default setting for all models is 2700K.	3 120V	MW Matte White
	R7 Round 7"	4 14W			
	R9 Round 9"	5 20W			
	R12 Round 12"	6 25W			

PERFORMANCE DATA

Model #	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	CCT (K)	Efficacy (lm/W)	Form Factor
DR2-R5383 Matte White	580	11	120	2700	54	Round 5"
	619			3000	56	
	670			3500	59	
	664			4000	60	
	641			5000	59	
DR2-R7483 Matte White	754	14	120	2700	55	Round 7"
	781			3000	56	
	824			3500	59	
	835			4000	60	
	829			5000	60	
DR2-R9583 Matte White	1143	20	120	2700	59	Round 9"
	1189			3000	60	
	1269			3500	63	
	1284			4000	64	
	1220			5000	63	
DR2-R12683 Matte White	1667	25	120	2700	69	Round 12"
	1697			3000	70	
	1784			3500	73	
	1827			4000	74	
	1763			5000	73	

• Delivered lumens are estimated and may vary based on lens option.



DIMMER COMPATIBILITY


Brand	Series	Model
Leviton	Decora	2L4306
		Illumatech IPL06
		IPL06-10Z
		Sureslide 6674
		Sureslide 6674 2J2305

Brand	Series	Model
Lutron	Skylark Contour	CTCL 153P
	Diva	DVCL 153P
	Maestro	MACL-153M
		MSCL-OP153M
	Skylark	SCL-153P


PHOTOMETRICS

DR2-R5 (5") Models


2700K

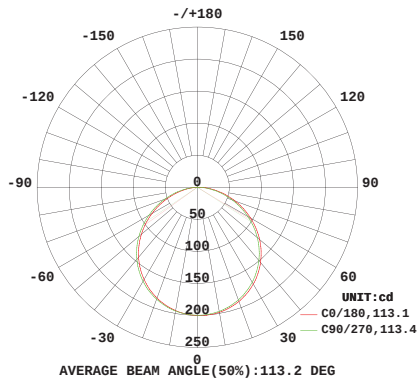


3000K

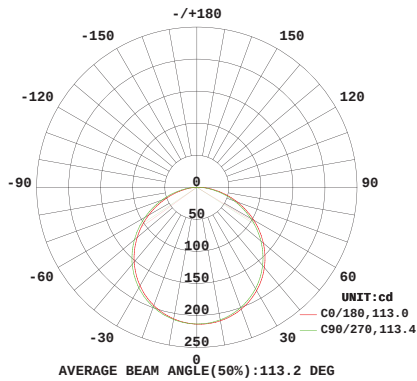


3500K

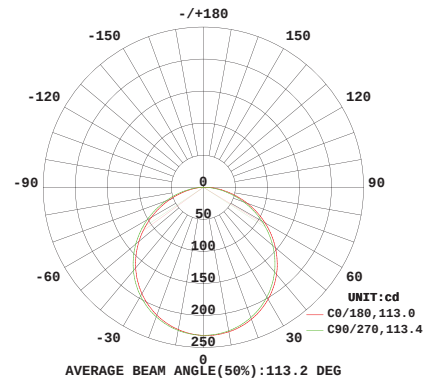

4000K

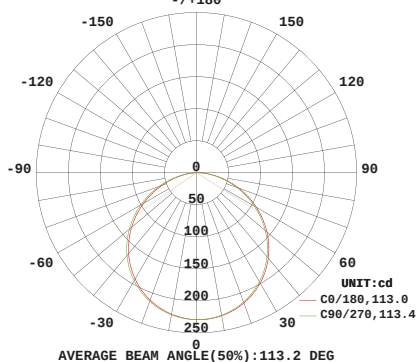

5000K

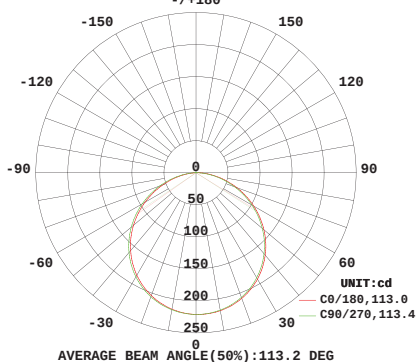




SURFACE MOUNTED DOWNLIGHT | DISCUS RUDI 2




PHOTOMETRICS (continued)

DR2-R7 (7") Models


2700K

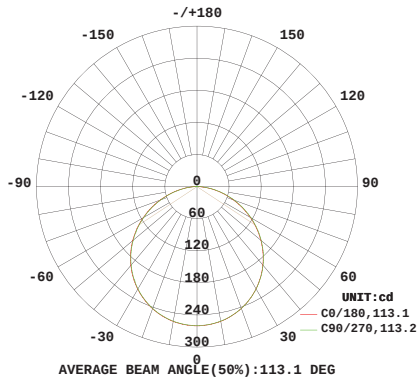


3000K

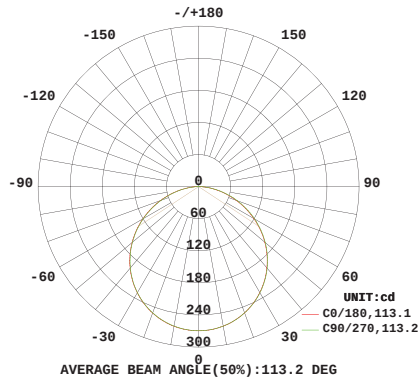


3500K

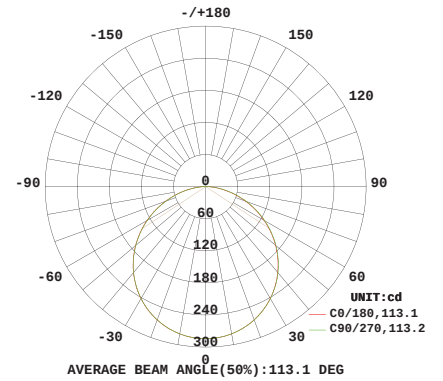

4000K

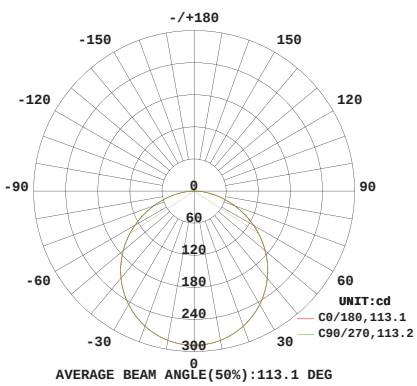

5000K

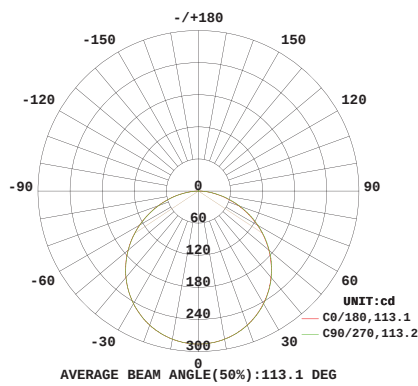




SURFACE MOUNTED DOWNLIGHT | DISCUS RUDI 2




PHOTOMETRICS (continued)

DR2-R9 (9") Models


2700K

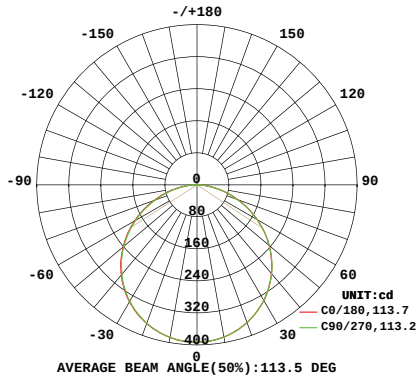


3000K

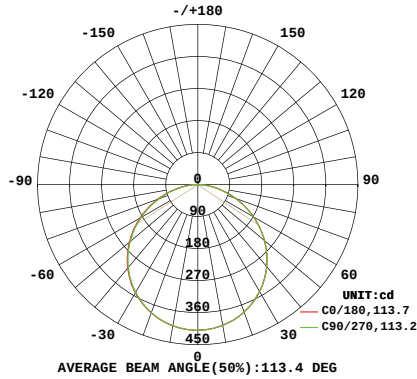


3500K

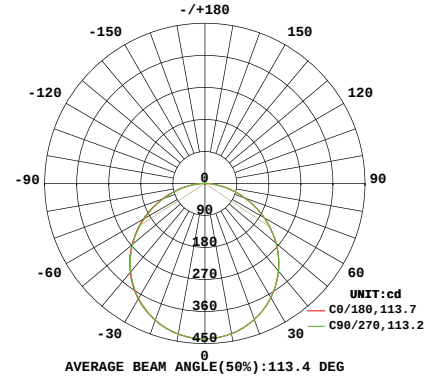

4000K

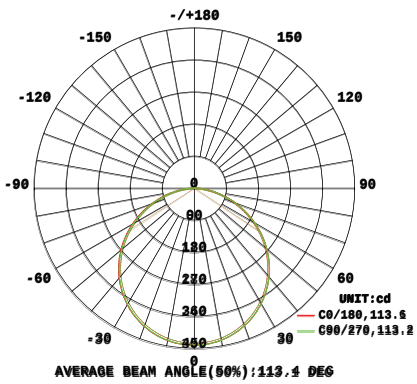

5000K

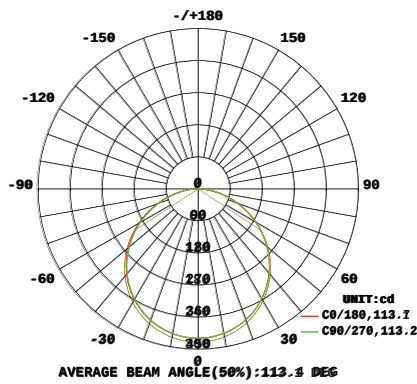





PHOTOMETRICS (continued)

DR2-R12 (12") Models


2700K

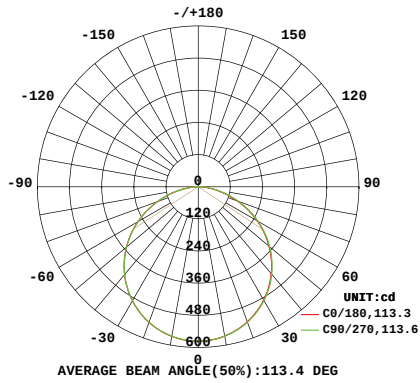


3000K

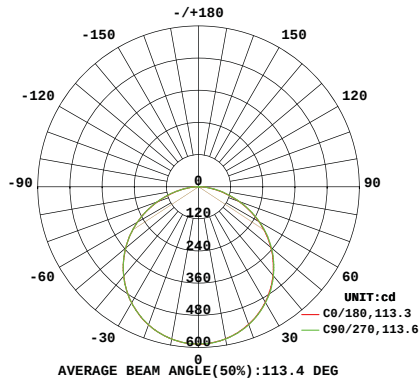

3500K

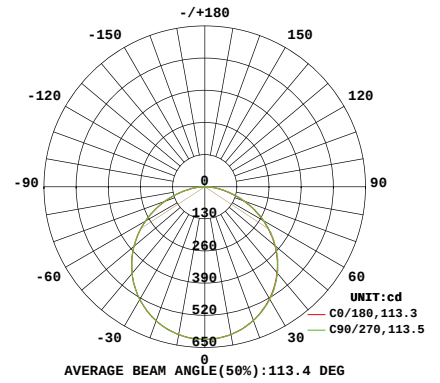

4000K

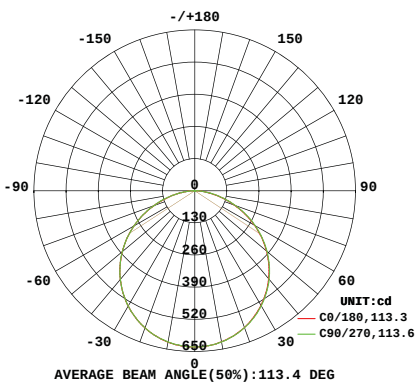

5000K

