

## SPECIFICATION SHEET

### SUBJECT

LED SILHOUETTE WRAPAROUND LUMINAIRE

### CUSTOMER PROJECT

Project: \_\_\_\_\_

Type: \_\_\_\_\_

Cat. No.: \_\_\_\_\_

Qty: \_\_\_\_\_

Date: \_\_\_\_\_

EEL Rep: \_\_\_\_\_



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

### DESCRIPTION

A smart solution for light commercial and residential purposes. The Silhouette Wraparound will look good anywhere it is utilized. This model can be surface or chain mounted, providing high efficiency LED light with modern charm.

### SPECIFICATION FEATURES

#### Construction

- Die formed 22 gauge galvanized steel painted
- High gloss enamel paint finish ensures maximum bonding and rust inhibition
- End caps are made of polycarbonate

#### Driver and Module Access

- Drivers can be accessed by removing the lens and then the driver cover

#### Mounting

- Surface mount
- Suspension mount (V-hooks included)

#### Shielding

- Frosted PC LED lens offers visual comfort

#### Compliance

- Modules and Drivers are UL recognized components
- Indoor luminaires are cULus listed
- Damp location rated

#### Warranty

- 5-Year Warranty (Standard)
- 10-Year Limited Warranty (Optional)



## SILHOUETTE LED WRAPAROUND

### SPW SERIES

#### SILHOUETTE LED WRAPAROUND

Wattage(s) 50W

Voltage 120-277V, 347V,  
120-347V

Dimmable 0-10V

CCT 4000K


Efficacy 125lm/W

Lumen Maintenance LED Modules rated  
for 50,000 hours

Operating Temperature -30°C to 40°C

CRI 80

Uplight 5.8%

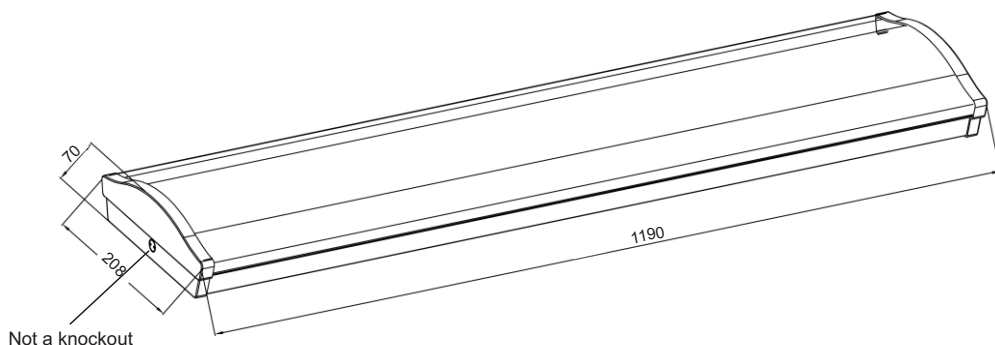

#### SPW4-45LED04







##### Dimensions

mm | 1190(L) x 208(W) x 70(H)  
inch | 46.9(L) x 8.2(W) x 2.8(H)

...continued

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

## ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Efficacy (lm/W)	Certification
	SPW4-45LED04-120M	6102	50	120-277	4000K	122	
	SPW4-45LED04-347	6102	50	347	4000K	122	
	SPW4-45LED04-120M/347	6102	50	120-347	4000K	122	

**NOTE:**  
Lumens are estimated


### CONTROLS (OPTIONAL)

ULT - HC419S | On-Off Sensor Control | 120-277V  
SMR1032INT | On-Off Dimming Motion Sensor 120-277V

### EMERGENCY BACK-UP (OPTIONAL)

EMP-1045 | LED Emergency Pack 10W 120-347V

## Photometrics

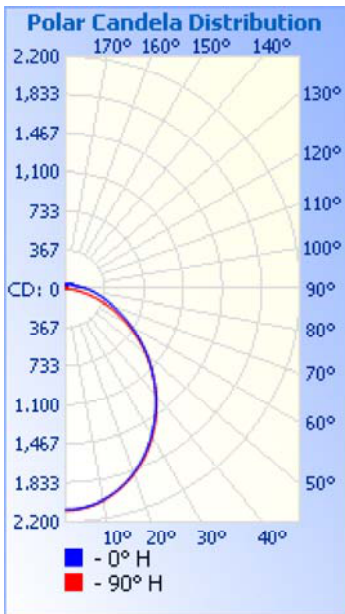

**Filename:** SPW4-45LED04-120M

**Manufacturer:** EELighting

**Luminaire:** SPW4-45LED04-120M

**Luminaire Cat:** LED-Wrap

**Lamp:** 2835/4000K

**Lamp Cat:** SLE50-I1200

**Lamp Output:** 1 lamp, rated Lumens/lamp: 5546.5

**Max Candela:** 2,101.4 at Horizontal: 270°, Vertical: 1°

**Input Wattage:** 47.83

**Luminous Opening:** Rectangle w/Luminous Sides  
(L: 46.85", W: 8.19", H: 2.76")

**Test:** 201710160001

**Test Lab:** PG

**Photometry:** Type C

**Nema Type:** 7 X 7

### Roadway Summary

<b>Cutoff Classification:</b>	SEMICUTOFF
<b>Distribution:</b>	Type VS
<b>Max Cd, 90 Deg Vert:</b>	195.2
<b>Max Cd, 80 to &lt;90 Deg:</b>	310.3
<b>Lumens % Lamp</b>	
<b>Downward Street Side:</b>	2,669.5 48.1%
<b>Downward House Side:</b>	2,554.6 46.1%
<b>Downward Total:</b>	5,224.1 94.2%
<b>Upward Street Side:</b>	171.5 3.1%
<b>Upward House Side:</b>	150.9 2.7%
<b>Upward Total:</b>	322.4 5.8%
<b>Total Lumens:</b>	5,546.5 100%