

SPECIFICATION SHEET

SUBJECT

LED ULTRATHIN GIMBAL

CUSTOMER PROJECT

Project: _____

Type: _____

Cat. No.: _____

Qty: _____

Date: _____

EEL Rep: _____



Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

DESCRIPTION

The UltraThin 6" Recessed adjustable Gimbal is the perfect solution for slope ceilings and wall washing applications that features a 15 degree tilt. The recessed LED slim luminaire is dimmable, Non-IC, damp location and Energy Star approved.



**ULTRATHIN
GIMBAL
6\"/>**

SPECIFICATION FEATURES

Construction

- Round 6" fixture with integral LEDs
- 15 degrees tilt

Controls

- Isolated driver factory installed inside connection box

Electrical

- Ambient temperature -40°C to 40°C
- CRI:80
- Non-IC
- Triac Dimmable (120V)
- 12 Watt equivalent to 65 Watt halogen
- 15 Watt equivalent to 75 Watt halogen

Mounting

- Cut hole in ceiling by using the template provided and snap fixture in opening with attached spring clips. Clearance needed - 2" (50mm).

Beam Angle

- 120°

Finish


- White
- Brushed Nickel
- Black

Compliance

- cETLus
- Energy Star

Warranty



- 1-Year Warranty
- 50,000+ hours

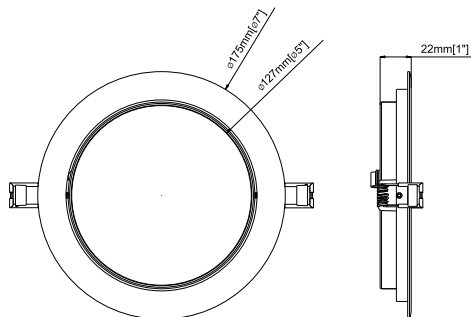

UTLED-6-S12W-3KWH-G / UTLED-6-S12W-4KWH-G
UTLED-6-S15W-3KWH-G / UTLED-6-S15W-4KWH-G

Dimensions



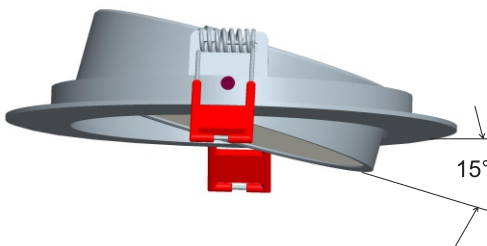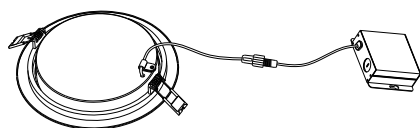

OD 7" (175mm) x ID 5-15/16" (151mm)
Cut out 6-1/8" (±1/8") (155 ± 3mm)
Thickness 1" (22mm)



...continued

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

ORDERING CODE, ENERGY AND PERFORMANCE DATA

	Model No.	Delivered Lumens (lm)	Input Watts (W)	Voltage (V)	Colour Temp. (K)	Certification	Type
	UTLED-6-S12W-3KWH-G	700	12	120V / 277-347V	3000K		Special Order
	UTLED-6-S12W-4KWH-G White	800	12	120V / 277-347V	4000K		Special Order
	UTLED-6-S15W-3KWH-G	900	15	120V / 277-347V	3000K		Special Order
	UTLED-6-S15W-4KWH-G White	1000	15	120V / 277-347V	4000K		Special Order

NOTE:

- 120V dimmable / 277-347V non-dimmable
- Lumens are estimated
- Energy Star certification applies to 120V only

OPTIONAL ACCESSORIES

UTLED-G-6-ICCANN | IC Rated Can for 6" UltraThin Gimbal
 UTLED-6-MP | Mounting Plate for 6" UltraThin models
 UTLED-JC-10 | Extension Cable 10ft for UltraThin models
 UTLED-JC-20 | Extension Cable 20ft for UltraThin models


SHIPPING DATA

Model No.	Gross Weight
UTLED-6-S12W-3KWH-G	0.73 kg / 1.61 lbs
UTLED-6-S12W-4KWH-G	0.73 kg / 1.61 lbs
UTLED-6-S15W-3KWH-G	0.73 kg / 1.61 lbs
UTLED-6-S15W-4KWH-G	0.73 kg / 1.61 lbs

...continued

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

PHOTOMETRICS

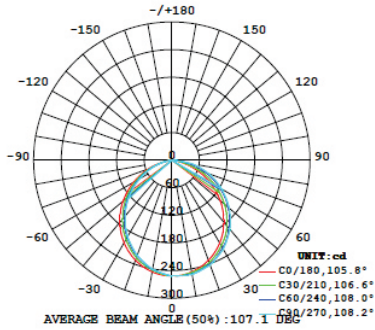

UTLED-6-S12W-3K

S/MH(C0/180) = 1.23
S/MH(C90/270) = 1.31
Lumens: 661.09
Nominal Power: 12 W
Efficacy: 65.54 lm/W

Candlepower


y	C0	C45	C90	C135	C180	C225	C270	C315
5	250.6	251.3	252.0	251.2	250.4	247.2	246.3	247.3
10	246.6	249.6	252.3	249.4	246.3	241.4	240.7	241.3
15	240.2	246.0	247.4	245.5	240.1	233.8	230.5	234.0
20	231.6	238.2	242.5	237.8	231.3	222.5	220.3	222.7
25	220.7	229.6	232.9	229.0	220.3	210.5	206.3	210.5
30	207.9	218.2	222.2	217.5	207.5	196.3	192.3	196.2
35	192.7	204.9	209.6	203.8	192.9	180.4	175.4	180.3
40	175.6	190.7	196.0	189.3	176.6	163.9	158.6	163.8
45	157.1	173.0	179.3	172.1	155.2	143.5	139.6	144.3
50	137.3	155.1	162.6	154.6	138.5	127.1	120.6	125.7
55	116.4	134.8	143.7	133.9	117.7	106.4	100.5	105.0
60	94.49	114.5	124.8	112.2	96.11	85.73	80.35	84.42
65	72.06	92.19	104.5	90.95	74.04	64.69	60.42	63.33
70	49.44	69.41	84.07	64.86	52.17	44.23	40.48	43.16
75	27.45	46.07	62.79	40.11	30.89	24.53	22.43	24.04
80	9.530	22.48	48.51	21.25	11.75	9.462	6.974	8.977
85	0	2.644	0	6.282	0	0.4177	0	0.2831
90	0	0	0	0	0	0	0	0

Coefficient of Utilization

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pec	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio															1.00	
	Coefficients of Utilization(CU)																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	
1.0	1.05	1.01	.97	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85	
2.0	.92	.85	.80	.90	.84	.79	.87	.82	.77	.83	.79	.75	.80	.77	.74	.72	
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.74	.68	.64	.71	.67	.63	.61	
4.0	.72	.63	.57	.71	.63	.56	.68	.61	.56	.66	.60	.55	.64	.58	.54	.52	
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45	
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40	
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.47	.42	.37	.35	
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.31	
9.0	.44	.36	.31	.44	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28	
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.32	.27	.26	

Zonal Lumen Summary

y	φ zone	φ total	lum, lamp
0- 5	5.985	5.985	0.91,0.91
5- 10	17.71	23.70	3.59,3.58
10- 15	25.75	52.47	7.94,7.94
15- 20	35.72	91.20	12.8,12.8
20- 25	47.25	138.5	20.9,20.9
25- 30	54.01	192.5	29.1,29.1
30- 35	58.85	251.3	38.38
35- 40	61.53	312.8	47.3,47.3
40- 45	62.04	374.9	56.7,56.7
45- 50	60.20	438.2	65.8,65.8
50- 55	56.44	491.6	74.4,74.4
55- 60	50.58	542.2	82.82
60- 65	43.01	585.2	88.5,88.5
65- 70	33.87	619.1	93.6,93.6
70- 75	23.78	642.9	97.2,97.2
75- 80	13.79	656.6	99.3,99.3
80- 85	4.381	661.0	100,100
85- 90	0.0561	661.1	100,100

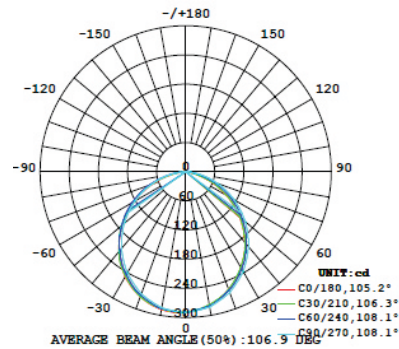

UTLED-6-S12W-4K

S/MH(C0/180) = 1.18
S/MH(C90/270) = 1.22
Lumens: 758.78
Nominal Power: 12 W
Efficacy: 74.78 lm/W

Candlepower

y	C0	C45	C90	C135	C180	C225	C270	C315
5	285.7	284.8	286.2	287.9	290.2	285.5	287.0	285.4
10	279.0	278.7	282.7	284.7	287.7	285.9	284.4	279.8
15	269.6	270.5	274.7	275.1	282.2	281.0	276.0	272.2
20	257.7	259.0	264.6	265.1	270.9	271.5	267.6	260.1
25	243.4	244.6	250.7	251.9	263.1	260.9	254.3	246.9
30	227.2	228.6	236.7	243.8	249.6	247.4	240.9	231.2
35	209.1	210.7	218.9	227.2	233.1	231.4	223.7	213.7
40	189.2	192.2	201.1	209.5	214.1	214.6	206.4	195.8
45	167.7	171.0	180.5	188.6	193.0	194.6	186.2	174.5
50	144.8	149.4	159.9	167.3	170.5	174.2	165.9	153.6
55	120.7	125.8	137.5	143.7	146.7	150.6	143.5	130.4
60	95.87	102.3	115.2	120.1	122.0	127.0	121.1	107.3
65	70.69	77.58	91.40	94.61	96.38	102.1	97.78	82.92
70	45.65	53.66	67.65	66.92	70.43	77.16	74.43	59.19
75	22.02	30.58	46.17	39.34	44.66	52.10	51.95	36.13
80	8.211	11.20	24.69	19.86	18.80	28.41	29.48	15.49
85	0	0.1746	0	3.595	0	6.101	0	1.594
90	0	0	0	0	0	0	0	0

Coefficient of Utilization

pcc	80%			70%			50%			30%			10%			0	
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
pfc	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio															1.00	
	Coefficients of Utilization(CU)																
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00	
1.0	1.05	1.01	.97	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85	
2.0	.92	.85	.80	.90	.84	.79	.87	.82	.77	.83	.79	.75	.80	.77	.74	.72	
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.74	.68	.64	.71	.67	.63	.61	
4.0	.72	.63	.57	.71	.63	.56	.68	.61	.56	.66	.60	.55	.64	.58	.54	.52	
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45	
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40	
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.48	.42	.37	.35	
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.31	
9.0	.44	.36	.31	.44	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28	
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.32	.27	.26	


Zonal Lumen Summary

y	φ zone	φ total	lum, lamp
0- 5	6.883	6.883	0.91,0.91
5- 10	20.37	27.25	3.59,3.59
10- 15	33.09	60.34	7.95,7.95
15- 20	44.51	104.8	12.9,12.9
20- 25	54.30	159.1	21.21
25- 30	62.04	221.2	29.1,29.1
30- 35	67.57	288.8	38.1,38.1
35- 40	70.61	359.4	47.4,47.4
40- 45	71.14	430.5	56.7,56.7
45- 50	69.13	499.6	65.8,65.8
50- 55	64.71	564.3	74.4,74.4
55- 60	58.01	622.4	82.82
60- 65	49.32	671.7	88.5,88.5
65- 70	38.89	710.5	93.6,93.6
70- 75	27.22	737.7	97.2,97.2
75- 80	15.80	753.5	99.3,99.3
80- 85	5.171	758.7	100,100
85- 90	0.0891	758.8	100,100

...continued

Telephone: 905 415 8878 Fax Number: 905 415 8872 Toll Free Telephone: 855 415 8878 Toll Free Fax: 855 415 8872

PHOTOMETRICS

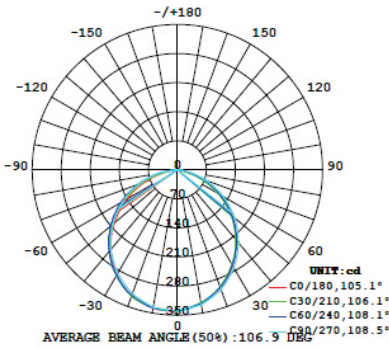

UTLED-6-S15W-3K

S/MH(C0/180) = 1.17
S/MH(C90/270) = 1.20
Lumens: 889.63
Nominal Power: 14 W
Efficacy: 70.63 lm/W

Candlepower


°	C0	C45	C90	C135	C180	C225	C270	C315
5	324.9	322.0	324.6	327.0	340.4	339.1	327.6	335.1
10	326.9	325.2	329.6	332.6	337.8	336.9	335.5	329.2
15	315.6	314.8	318.1	325.8	331.7	332.2	326.8	320.9
20	301.5	299.5	306.7	313.5	322.5	322.1	318.1	307.3
25	284.6	282.9	289.5	299.9	309.7	310.7	303.2	292.7
30	265.9	263.6	272.2	282.9	292.3	295.2	288.4	274.7
35	244.2	242.0	250.8	262.5	272.5	276.9	269.1	254.4
40	221.6	219.7	229.2	240.6	249.9	257.0	249.7	233.4
45	196.7	194.4	204.7	215.6	225.1	232.5	226.6	209.1
50	170.6	169.3	180.0	190.3	198.5	209.6	203.5	185.0
55	142.6	142.1	153.1	162.0	170.5	182.0	177.9	158.4
60	113.6	115.0	126.2	133.7	141.9	154.4	152.2	132.1
65	84.04	86.44	98.55	102.9	111.0	129.1	129.2	104.2
70	54.43	58.88	70.86	75.76	80.49	95.37	95.19	76.33
75	26.00	32.80	46.40	40.79	50.10	65.19	71.45	48.70
80	2.700	11.39	21.99	19.20	20.91	36.33	44.71	21.86
85	0	0	0	2.955	0	8.102	0	2.640
90	0	0	0	0	0	0	0	0

Zonal Lumen Summary

°	zone	total	lum,lm
0- 5	8.069	8.069	0.91,0.91
5- 10	23.89	21.95	3.99,2.99
10- 15	38.81	70.76	7.95,7.95
15- 20	52.23	123.0	13.6,13.6
20- 25	63.73	186.7	21.21
25- 30	72.79	259.5	29.2,29.2
30- 35	79.22	339.7	38.1,38.1
35- 40	82.74	421.5	47.4,47.4
40- 45	83.37	504.8	56.7,56.7
45- 50	81.02	589.9	65.9,65.9
50- 55	75.89	661.8	74.4,74.4
55- 60	68.06	729.8	82.82
60- 65	57.86	787.7	88.5,88.5
65- 70	45.52	833.2	93.7,93.7
70- 75	31.95	865.1	97.2,97.2
75- 80	18.43	883.6	99.3,99.3
80- 85	5.954	889.5	100,100
85- 90	0.0982	889.6	100,100

Coefficient of Utilization

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization (CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.05	1.01	.97	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.87	.85														
2.0	.92	.85	.80	.90	.84	.79	.87	.82	.77	.83	.79	.75	.80	.77	.74	.72														
3.0	.81	.73	.67	.79	.72	.66	.76	.70	.65	.74	.68	.64	.71	.67	.63	.61														
4.0	.72	.63	.57	.71	.63	.56	.68	.61	.56	.66	.60	.55	.64	.58	.54	.52														
5.0	.64	.56	.49	.63	.55	.49	.61	.54	.48	.59	.53	.48	.57	.52	.47	.45														
6.0	.58	.49	.43	.57	.49	.43	.55	.48	.42	.54	.47	.42	.52	.46	.42	.40														
7.0	.53	.44	.38	.52	.44	.38	.50	.43	.38	.49	.42	.37	.48	.42	.37	.35														
8.0	.48	.40	.34	.47	.39	.34	.46	.39	.34	.45	.38	.33	.44	.38	.33	.31														
9.0	.44	.36	.31	.44	.36	.30	.42	.35	.30	.41	.35	.30	.40	.34	.30	.28														
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.37	.32	.27	.26														

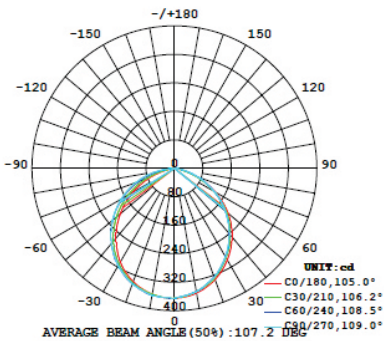

UTLED-6-S15W-4K

S/MH(C0/180) = 1.22
S/MH(C90/270) = 1.18
Lumens: 950.782 W
Nominal Power: 14W
Efficacy: 73.48 lm/W

Candlepower

°	C0	C45	C90	C135	C180	C225	C270	C315
5	362.1	358.9	358.5	360.1	362.8	363.8	362.7	362.6
10	355.5	351.3	352.3	352.2	359.0	360.8	362.7	358.6
15	345.5	341.0	339.2	343.9	350.5	355.1	354.5	351.6
20	332.6	325.2	326.0	329.1	338.8	343.7	346.3	339.0
25	316.1	308.3	306.7	312.9	323.6	331.1	331.8	325.2
30	297.1	289.1	287.4	293.2	304.6	314.7	316.7	307.6
35	275.7	268.2	263.9	269.6	281.1	294.8	296.3	287.1
40	252.1	241.8	240.4	244.8	255.9	273.1	275.9	265.7
45	225.5	215.1	213.4	216.9	228.2	247.3	251.7	240.7
50	196.8	186.4	186.5	188.9	198.8	221.1	227.6	215.7
55	165.4	158.4	157.2	157.8	167.8	191.3	200.3	187.3
60	131.8	127.7	127.9	126.9	135.5	161.2	173.1	158.1
65	97.38	95.49	95.12	94.96	102.2	128.7	144.0	125.7
70	62.29	64.17	63.33	61.84	69.86	95.60	114.8	92.16
75	28.34	34.77	42.02	31.67	36.48	62.45	84.20	57.36
80	2.378	12.01	17.72	10.71	7.549	30.63	53.62	28.15
85	0	0	0	0.0022	0	5.066	0	2.824
90	0	0	0	0	0	0	0	0

Zonal Lumen Summary

°	zone	total	lum,lm
0- 5	8.675	8.675	0.91,0.91
5- 10	25.68	24.35	3.61,3.61
10- 15	41.74	76.09	8,8
15- 20	56.19	122.3	13.9,13.9
20- 25	68.60	200.9	21.1,21.1
25- 30	78.42	279.2	29.4,29.4
30- 35	85.38	364.7	38.4,38.4
35- 40	89.20	452.9	47.7,47.7
40- 45	89.90	543.8	57.2,57.2
45- 50	87.35	621.1	66.4,66.4
50- 55	81.68	712.8	75.75
55- 60	72.97	785.8	82.6,82.6
60- 65	61.62	847.4	89.1,89.1
65- 70	47.86	895.2	94.2,94.2
70- 75	32.64	927.9	97.6,97.6
75- 80	17.75	945.6	99.5,99.5
80- 85	5.098	950.7	100,100
85- 90	0.0499	950.8	100,100

Coefficient of Utilization

pcc	80%			70%			50%			30%			10%			0														
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0														
pfc	20%			20%			20%			20%			20%			0														
RCR	RCR:Room Cavity Ratio															Coefficients of Utilization(CU)														
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00														
1.0	1.05	1.01	.98	1.03	.99	.96	.99	.96	.93	.95	.92	.90	.91	.89	.88	.86														
2.0	.92	.86	.80	.90	.84	.79	.87	.82	.78	.84	.79	.76	.81	.77	.74	.72														
3.0	.81	.73	.67	.80	.72	.67	.77	.71	.65	.74	.69	.64	.72	.67	.63	.61														
4.0	.72	.64	.57	.71	.63	.57	.68	.61	.56	.66	.60	.55	.64	.59	.55	.52														
5.0	.65	.56	.49	.64	.55	.49	.61	.54	.49	.59	.53	.48	.58	.52	.48	.45														
6.0	.58	.49	.43	.57	.49	.43	.56	.48	.43	.54	.47	.42	.52	.46	.42	.40														
7.0	.53	.44	.38	.52	.44	.38	.51	.43	.38	.49	.42	.38	.48	.42	.37	.35														
8.0	.48	.40	.34	.48	.40	.34	.46	.39	.34	.45	.38	.34	.44	.38	.33	.32														
9.0	.44	.36	.31	.44	.36	.31	.43	.35	.31	.42	.35	.30	.41	.35	.30	.28														
10.0	.41	.33	.28	.40	.33	.28	.39	.32	.28	.38	.32	.28	.38	.32	.27	.26														