



BAY-C : LED BAY LIGHT ROUND

DESCRIPTION

A cost-effective, low-profile, solid state solution for highbay applications, providing one-for-one replacement of high-wattage HID fixtures.

FEATURES

- Up to 151 lpw ultra-high efficiency delivers superior performance over legacy HID highbays
- Instant-on with no warmup
- 1-10V dimming

LISTINGS

- UL Listed for wet locations
- IP65 Rated for dust and water ingress protection

PERFORMANCE

- LED Rated lifetime L80: 72,000 hours
- 5000K CCT
- CRI: 80+

THERMAL

- -40°F to +122°F (-40°C to +50°C) operating temperature

ELECTRICAL

- Input voltage: 100-277V
- Dimmable power supply (1-10V)
- Power Factor: >.9
- THD: <20%

CONSTRUCTION

- Die-cast aluminum heatsink with thermally optimized fans
- Five-step super durable TGIC powder coating for tough environmental conditions
- Tempered glass lens standard on all fixtures
- 6' power cord standard for more installation flexibility

WARRANTY

- 5 year limited warranty; see eiko.com for warranty details

project name	type
catalog number	
comments	voltage
approved by	date



APPLICATIONS

- Warehouses
- Manufacturing Plants
- Distribution Centers
- Grocery Stores
- Gymnasiums
- Indoor Recreational Facilities
- Cold Storage
- Big Box Retail
- Service Repair Centers



ORDERING INFORMATION

EXAMPLE: BAYC/100W/850/UD-[BLANK, OPTIONS]


Model	Package	CRI/CCT	Voltage	Dimming
BAYC : Bay C-Series Round High Bay	150W - 150W 200W - 200W	850 - 80 CRI; 5000K	U - 100-277V	D - 0-10V Dimming

PERFORMANCE SUMMARY

Order Code	Item #	Watts	Beam Angle	Nominal Lumens	LPW	Replaces	CCT	CRI	Dimming	Volts
10935	BAYC/150W/850/UD	150W	120°	22,650	151	250W-320W	5000K	80+	0-10V	100-277V
10936	BAYC/200W/850/UD	200W	120°	30,000	150	320W-400W	5000K			

AVAILABLE ACCESSORIES

Order Code	Item #	Description
09585	BAY-REFLECTOR BT-AL-60D	60° Beam Aluminum Reflector
09586	BAY-REFLECTOR BT-AL-90D	90° Beam Aluminum Reflector
09587	BAY-REFLECTOR BT-PC-70D	70° Beam Polycarbonate Reflector
10378	BAY-PA-1/2NPS-W	BAY Pipe Adaptor 1/2" NPS White
10379	BAY-PA-3/4NPS-W	BAY Pipe Adaptor 3/4" NPS White
10387	BAY-REFLECTOR-AC16	BAY Light Reflector Clear Acrylic
09914	BAY-REFLECTOR-CV16	Cloudveil Reflector, 16" for BAY
09915	BAY-REFLECTOR-CV22	Cloudveil Reflector, 22" for BAY
09912	BAY-WG-AL	Wire Guard, Aluminum Reflector
09911	BAY-WG-PC	Wire Guard, PC Reflector
10386	BAY-CWB-16	16" Clear Wide Bay Lens Acrylic
10385	BAY-CDL-22	22" Clear Drop Lens Acrylic
10383	BAY-CDL-16	16" Clear Drop Lens Acrylic
10380	BAY-BAND-16	Stainless Steel Clamp Band, 16" Reflectors
10381	BAY-BAND-22	Stainless Steel Clamp Band, 22" Reflectors
10382	BAY-CCL-16	16" Clear Conic Lens Acrylic
10384	BAY-CCL-22	22" Clear Conic Lens Acrylic

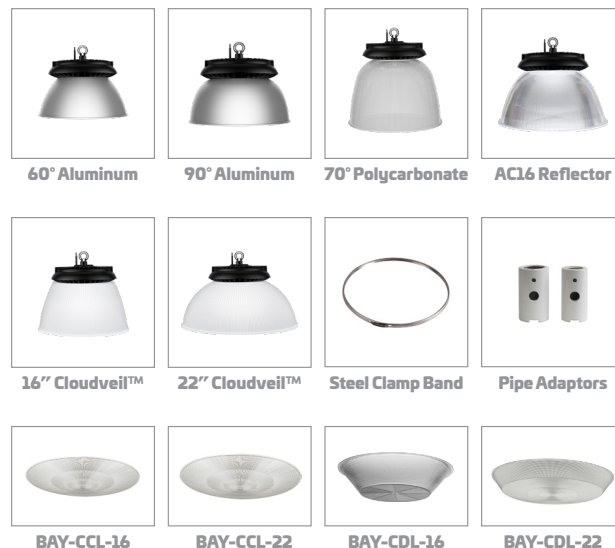


REFLECTOR CROSS-REFERENCE

	No Reflector	BT-AL-60D	BT-AL-90D	BT-PC-70D	AC16	CV16	CV22
BAY-BAND-16				X	X	X	
BAY-BAND-22							X
BAY-CCL-16				X*	X*	X*	
BAY-CCL-22							X**
BAY-CDL-16				X*	X*	X*	
BAY-CDL-22							X**
BAY-CWB-16				X*	X*	X*	
BAY-WG-AL		X	X				
BAY-WG-GL	X						
BAY-WG-PC				X	X	X	

* Must also purchase BAY-BAND-16 ** Must also purchase BAY-BAND-22


DIMENSIONS

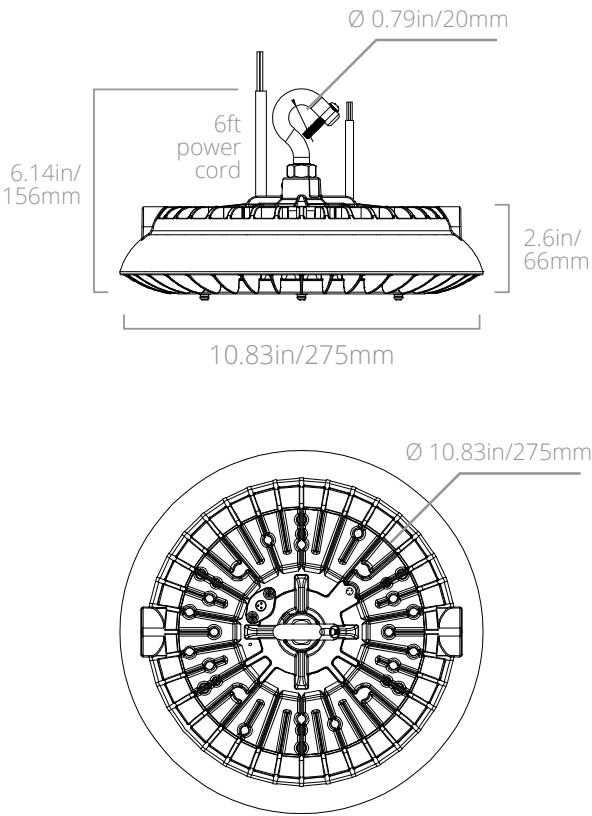

PHOTOMETRICS

BAYC/150W/850/UD

ZONAL LUMEN SUMMARY		
Zone	Lumens	%Fixture
0-30	6520.32	28.2%
0-40	10781.24	46.7%
0-60	19192.02	83.1%
0-80	22809.87	98.8%
0-90	22910.00	99.2%
0-180	23094.26	100%



BAYC/200W/850/UD

ZONAL LUMEN SUMMARY		
Zone	Lumens	%Fixture
0-30	8536.81	28.2%
0-40	14112.21	46.6%
0-60	25128.11	82.9%
0-80	29921.95	98.7%
0-90	30059.31	99.2%
0-180	30301.63	100%

