



RDR Downlight Retrofit

FEATURES

- Replaces legacy 4" or 6" CFL or incandescent downlights
- Provides comfortable diffused light with no dark spots
- Integrated white trim with medium base (E26) socket adapters (included) for direct replacement
- ToggleCCeT feature (select models) allows multiple CCT options to be toggled at the light switch
- FieldCCeT feature (select models) allows for multiple "set and forget" CCT options in each fixture

CERTIFICATIONS

- UL Listed for Wet/Damp locations
- ENERGY STAR® Approved for superior energy efficiency
- Title 20 certified and supports compliance with Title 24 (JA8) (90CRI models)

PERFORMANCE

- Rated lifetime L70: 35,000
- 3000K CCT
- FieldCCeT: 27/30/35/40/5000K
- ToggleCCeT: 30/40/5000K
- CRI: >80; >90

ELECTRICAL

- Input voltage: 120V
- Triac dimming
- Power Factor: >0.9
- THD: <20%

THERMAL

- -4°F to 104°F (-20°C to 40°C) operating temperature

CONSTRUCTION

- White finish
- Frosted lens for diffuse lighting

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



RDR4



RDR6



ToggleCCeT makes changing color temperature as easy as the flick of a switch! Cycle through available CCTs by switching the light off and on.



FieldCCeT allows the user to select the desired color temperature on install using a switch on the back of the fixture.



PowerSet allows for multiple "set and forget" lumen stops in each fixture.

APPLICATIONS

- Classroom
- Meeting rooms
- Office
- Library
- Retail
- Reception/Lobby

CONFIGURATOR

MODEL	SIZE	LUMENS	WATTS	CRI/CCT	VOLTAGE	DIMMING	FINISH	REFLECTOR	OPTIONS	
RDR : Downlight Retrofit	4 - 4"	65 - 650 lm	10W - 10W	830 - 80 CRI; 3000K	120 - 120V	DT - Triac dimming	WH - White	B - Baffle	D - Generation	
		85 - 850 lm	13W - 13W							
		[Blank] 1,100 lm	13W - 13W							
	6 - 6"	75 - 750 lm	11W - 11W							
		[Blank] 1,500 lm	16W - 16W							
		120 - 1,200 lm	17W - 17W							
	4 - 4"	72 - 720 lm	8W - 8W	9CCT3 - 90 CRI; 30/40/5000K (ToggleCCeT)						
	6 - 6"	72 - 900 lm	10W - 10W	9CCT5 - 90 CRI; 27/30/35/40/5000K (FieldCCeT)						
	4 - 4"	[Blank] 800 lm	10W - 10W							
	6 - 6"	[Blank] 1,040 lm	13W - 13W							
	4 - 4"	[Blank] 1,040/800/640 lm	PS13 - 13W/10W/8W							9FCCT - 90 CRI; 27/30/35/40/5000K (FieldCCeT)
	6 - 6"	[Blank] 1,400/1,100/850 lm	PS17 - 17W/13W/10W							



RoHS
Compliant



(90CRI models only)

PERFORMANCE SUMMARY

ORDER CODE	ITEM #	SIZE	WATTS	LUMENS	CCT	CRI	VOLTS	DAMP/WET LOCATION	TITLE 20/JA8	ENERGY STAR
11199	RDR4-65-10W-830-120DT-WH-B	4"	10W	650	3000K	>80	120V	Damp		★
11203	RDR4-85-13W-830-120DT-WH-B	4"	13W	850	3000K	>80	120V	Wet		★
12518	RDR4/13W/830/120DTWHB	4"	13W	650	3000K	>80	120V	Wet		★
11201	RDR6-75-11W-830-120DT-WH-B	6"	11W	750	3000K	>80	120V	Damp		★
12670	RDR6/13W/830/120DT	6"	13W	900	3000K	>80	120V	Wet		★
12519	RDR6/16W/830/120DTWHB	6"	16W	850	3000K	>80	120V	Wet		★
11204	RDR6-120-17W-830-120DT-WH-B	6"	17W	1,200	3000K	>80	120V	Wet		★

TOGGLECCeT

11200	RDR4-72-8W-9CCT3-120DT-WH-B	4"	8W	720	30/40/5000K	>90	120V	Wet	✓	★
11202	RDR6-72-10W-9CCT3-120DT-WH-B	6"	10W	900	30/40/5000K	>90	120V	Wet	✓	★
12761	RDR4-72-8W-9CCT3-120DT-WH-B-D	4"	8W	720	30/40/5000K	>90	120V	Wet	✓	★
12762	RDR6-72-10W-9CCT3-120DT-WH-B-D	6"	10W	900	30/40/5000K	>90	120V	Wet	✓	★

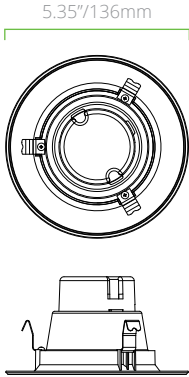
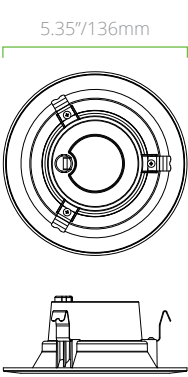
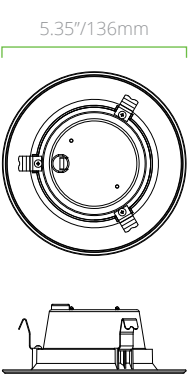
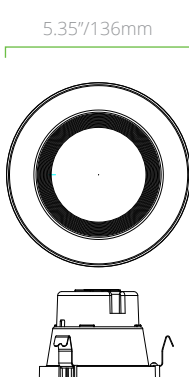
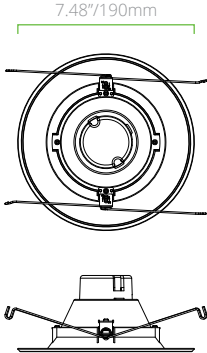
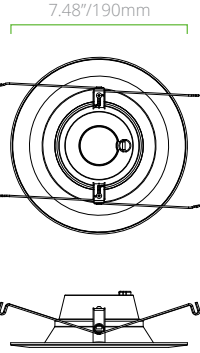
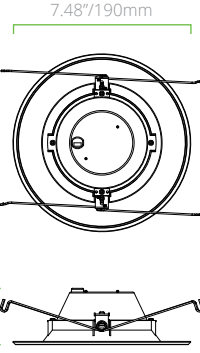
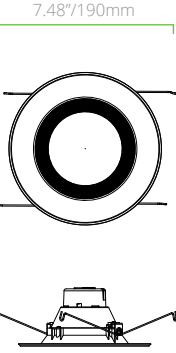
FIELDCCeT

11571	RDR4/10W/9CCT5/120DTWHB	4"	10W	800	27/30/35/40/5000K	>90	120V	Wet	✓	★
11572	RDR6/13W/9CCT5/120DTWHB	6"	13W	1,040	27/30/35/40/5000K	>90	120V	Wet	✓	★

POWERSet AND FIELDCCeT

12520	RDR4/PS13/9FCCT/120DTWHB	4"	13W/10W/8W	1,040/800/640	27/30/35/40/5000K	>90	120V	Wet	✓	★
12521	RDR6/PS17/9FCCT/120DTWHB	6"	17W/13W/10W	1,400/1,100/850	27/30/35/40/5000K	>90	120V	Wet	✓	★

PRODUCT DIMENSIONS

 RDR4/10W RDR4-72-8W	 RDR4-65-10W	 RDR4-85-13W RDR4/13W	 RDR4/PS13
 RDR6/13W RDR6-72-10W RDR6/16W	 RDR6-75-11W	 RDR6-120-17W	 RDR6/PS17