



SCS Surface Canopy Square

FEATURES

- Quick mount design simplifies installation
- Standard Z10 receptacle simplifies adding controls
- Low profile is ideal in applications with low mounting heights
- PowerSet feature allows for multiple “set and forget” lumen stops
- Up to 150 lpw ultra-high efficiency delivers superior performance
- Optional field installed “garage” lens, optimizes the light distribution for garage applications

CERTIFICATIONS

- UL Listed for wet locations
- IP65 Rated
- IK10 Impact Rated
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

PERFORMANCE

- Rated lifetime:
 - L80 >72,000hrs @ 50°C
 - L90 >40,000hrs @ 50°C
- PowerSet: 60/40/25W; 7,400/5,200/3,350 lm
- 70W; 9,725 lm
- 4000K, 5000K CCT
- CRI: >80

ELECTRICAL

- Input voltage: 120-277V
- 0-10V dimming to <10% with dim-to-off capability
- Power Factor: >0.9
- THD: <20%

THERMAL

- -40°F to 122°F (-40°C to 50°C) operating temperature

CONSTRUCTION

- Die-cast aluminum construction
- Impact-resistant polycarbonate lens
- 1/2" NPS entry point for conduit and accessories
- 3/4" NPS pendant mount
- Quick mount surface bracket included

WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

project name	type
catalog number	voltage
approved by	date



APPLICATIONS

- Entryways
- Garages
- Plazas
- Utility Closets
- Public Restrooms
- Eaves

CONFIGURATOR

MODEL	LUMEN PACKAGE	CRI/CCT	VOLTAGE	DIMMING
SCS : Surface Canopy Square	PS60 - 60/40/25W; 7,400/5,200/3,350 lm	840 - 80 CRI; 4000K	U - 120-277V	D - 0-10V Dimming
	70W - 70W; 9,725 lm	850 - 80 CRI; 5000K		



PERFORMANCE SUMMARY

ORDER CODE	ITEM #	WATTS	NOMINAL LUMENS	CCT	CRI	VOLTS	DIMMING	REPLACES	FINISH	DLC PREMIUM
11521	SCS/PS60/840/UD	60/40/25W	7,400/5,200/3,350 lm	4000K	>80	120-277V	0-10V	125W-250W	Bronze	✓
11522	SCS/PS60/850/UD	60/40/25W	7,400/5,200/3,350 lm	5000K	>80	120-277V	0-10V	125W-250W	Bronze	✓
11523	SCS/70W/840/UD	70W	9,725 lm	4000K	>80	120-277V	0-10V	250W-320W	Bronze	✓
11684	SCS/70W/850/UD	70W	9,725 lm	5000K	>80	120-277V	0-10V	250W-320W	Bronze	✓

ACCESSORIES


ORDER CODE	ITEM #	DESCRIPTION
11686	SCS/LENS-G	Lens for SCS garage applications

SENSORS

11947	SEN5A/PIR/Z10*	PIR Bi-Level Dimming sesnor with photocell
11931	SEN5A/M/Z10*	Microwave Bi-level dimming sensor with photocell
11933	SEN5A/CT	Commissioning Tool for Series 5 Sensors


* Must order SEN5A/CT commissioning tool to configure sensor

PRODUCT DIMENSIONS

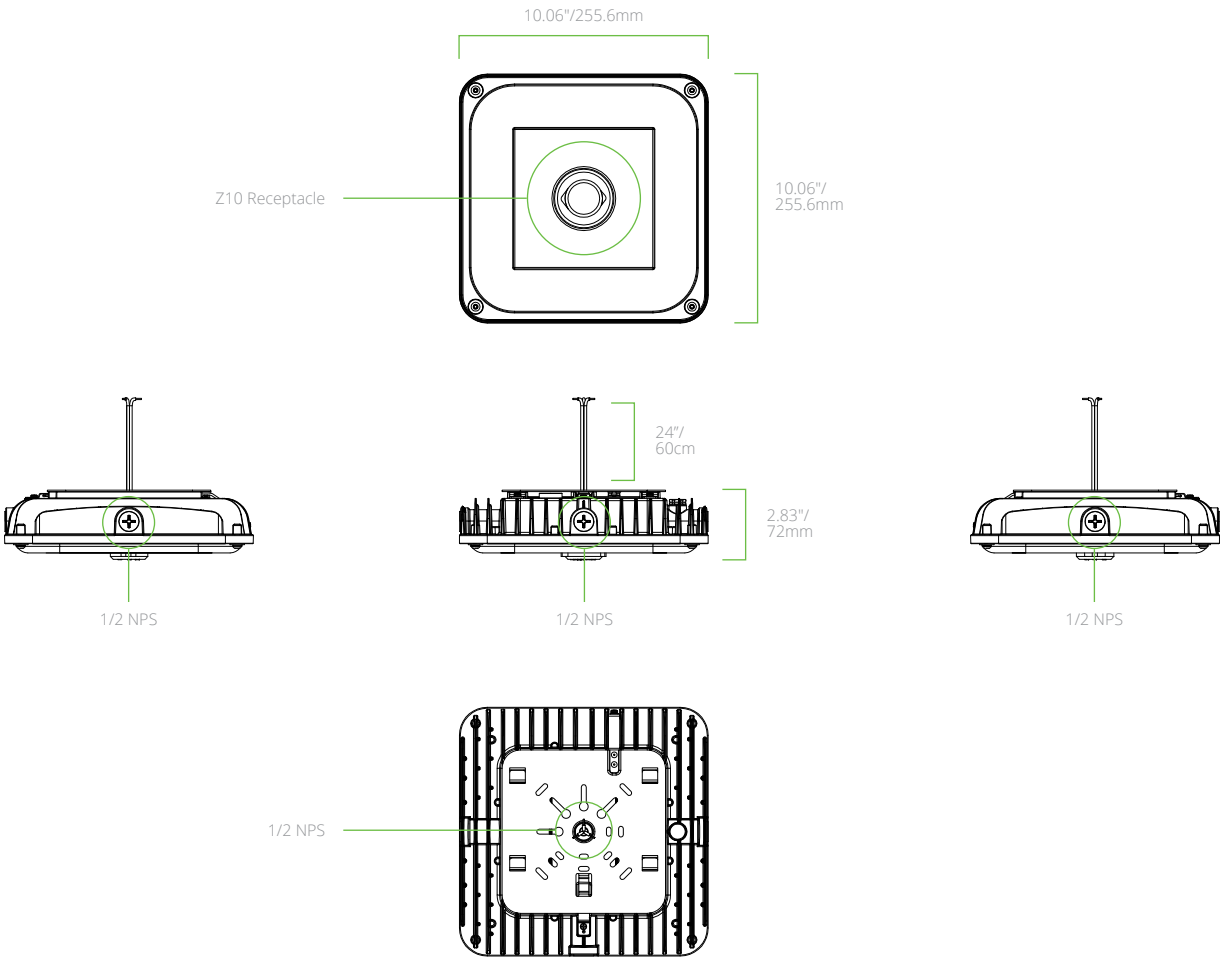


PHOTOMETRICS


SCS/PS60/8xx/UD (Typical performance @4000K; Standard distribution)

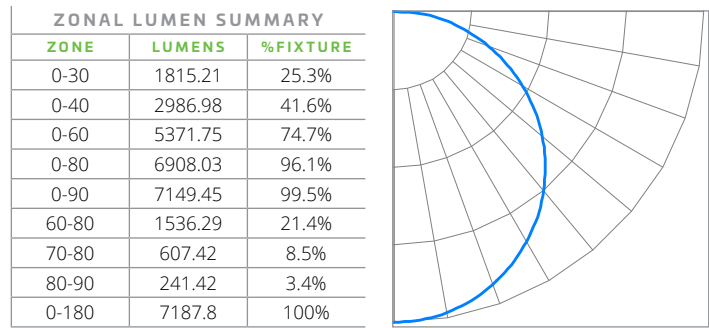


SCS/PS60/8xx/UD/G (Typical performance @4000K with Garage distribution)*

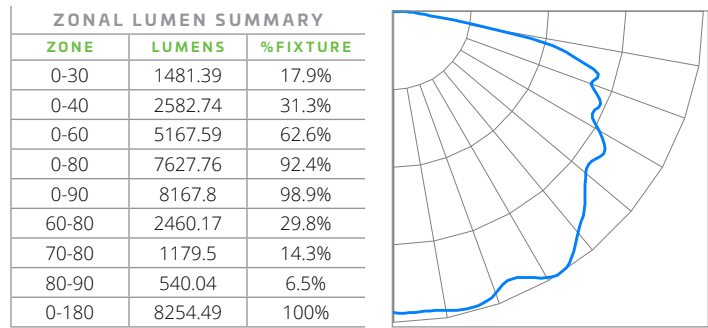

SCS/70W/8xx/UD (Typical performance @4000K; Standard distribution)

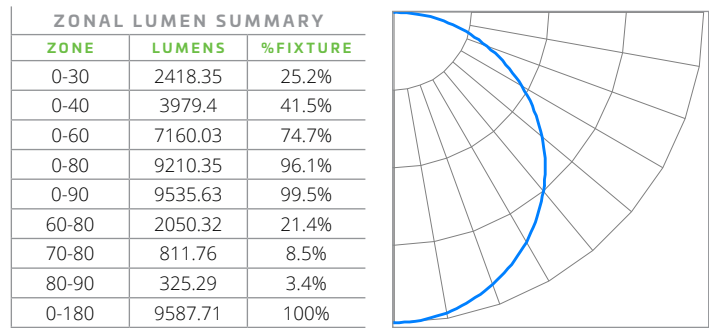

SCS/70W/8xx/UD/G (Typical performance @4000K with Garage distribution)*

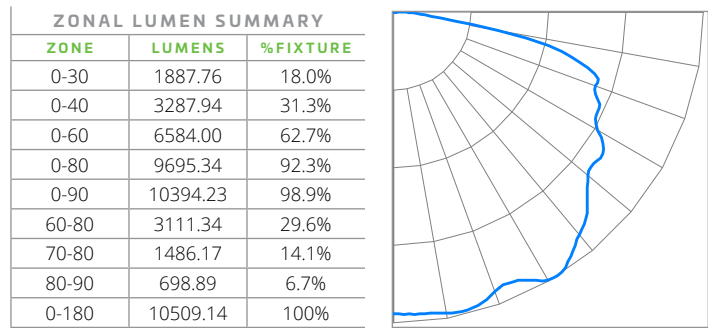

**Must purchase optional SCS/LENS-G replacement lens)*