


T8 - 2' & 4' ECONOMY FLUORESCENT WRAP AROUND (2 LAMP, SURFACE MOUNT)

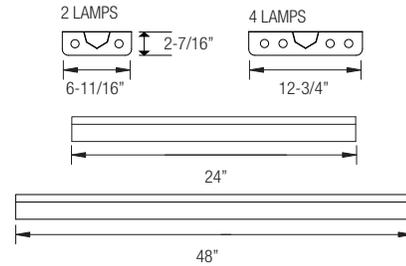

APPLICATION:

Ideal for general office lighting, corridors, educational institutions, hospitals, and retail.

PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Provides even illumination up to 180 degrees
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial, industrial and residential spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Lightweight design enables for quick, easy installation
- Not intended for continuous row mounting
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

LENS - Prismatic acrylic Lens

LISTING

UL/C-UL listed to US and Canadian standards

WARRANTY

Guaranteed for one year against mechanical defects

T8
OEW

Ordering Information > Example: 2-OEW-2-17-T8-ADV-10-MVOLT-EMG-T8-BX-700

2	OEW							
---	-----	--	--	--	--	--	--	--

FIXTURE SIZE

2 - 2'

SERIES

OEW-Oracle
Economy
Wrap Around

WATTAGE

2' FIXTURE
2-17-T8 (2 lamps/17W/T8)

VOLTAGE

120- 120

OF BALLAST

(Blank) - 1 Ballast
2 - 2 Ballasts

BALLAST FACTOR

(Blank) - Normal BF

EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

BALLAST CONFIGURATION & CODE

17W/T8	DESCRIPTION
(Blank)	Electronic Program Start

OTHER OPTIONS

OCMS	- Motion Sensor
USA	- Made in America Compliance

Economy Fluorescent Wrap Around