


LED GENERAL LIGHTING LINEAR CURVE LUMINAIRE (SURFACE OR SUSPENDED MOUNT)

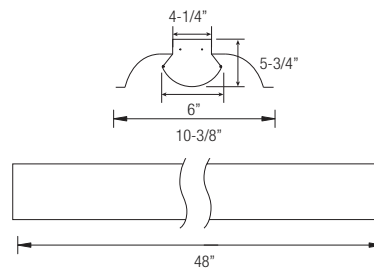

CALCULATED
L70
LIFETIME
50,000 HRS

2000 LUMENS	3000 LUMENS	4000 LUMENS	6000 LUMENS	8000 LUMENS
23 WATT	33 WATT	46 WATT	66 WATT	92 WATT

APPLICATION:

- General illumination for narrow area layouts
- Hallways/corridors, office buildings, schools, hospitals, public walkway areas, parking lots and industrial.
- Retail aisles or long narrow store format

- Library stacks and storage areas
- Design for general or task lighting
- Economical alternative to meet design and budget requirements

PRODUCT FEATURES:

- Life tested to ensure light output up to 50,000 hours of operation to L70
- Tested to LM-79 and LM-80 standards
- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Standard reflector comes in white highly reflective finish

- Frosted extruded lens delivers highly efficient volumetric light
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for dry and damp environments
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables easier installation

OPTICS - The frosted extruded acrylic lens of the OIC1-LED gather the light scattered by the LED chips and delivers highly efficient volumetric lighting to any environment. LEDs are spaced on board ideally to completely hide any LED image when fixture is installed and powered on. The lens can be easily removed without the use of tools, making the unit upgradable and easily maintained.

PERFORMANCE - The light engines found in the OIC1-LED are rated at 80+ CRI and are available in multiple CCTs: 3000K, 3500K, 4000K and 5000K. Rated and tested to LM-79 and LM-80 standards. The LEDs are also binned to a 3-step MacAdam ellipses to achieve consistent color from fixture to fixture.

ELECTRICAL - Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING - The OIC1-LED comes standard with 0-10V dimming on either 120 or 277V. Also available in Lutron dimming options. Consult factory for dimmer compatibility.

OPTIONS - Fixtures can be shipped pre-installed with daylight harvesting controls, occupancy sensors, and/or power pack. Available manufacturer options include Leviton, Hubbell Automation, and others. The Wattstopper - **MS-FM105** Super High Frequency Occupancy Sensor is a line voltage sensor that turns lighting on and off based on occupancy, and can hold lights off when sufficient daylight is available. It detects motion via super high frequency (SHF) electromagnetic waves and the Doppler principle. MS-FM105 is installed behind fixture lenses and hidden from view.

QUALITY CONTROL - Every fixture is turned on and rigorously tested by our QC Department before shipping.

LISTING - ETL/C-ETL listed to US and Canadian standards

WARRANTY - Limited 5 Year Warranty



Ordering Information: Example: 4-OIC1-LED-4000L-DIM10-MVOLT-30K

4	OIC1	LED								
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS	
2 - 2'	OIC1-Oracle LED General Linear Luminaire	LED	2' FIXTURE	DIM10 - DIM10-MVOLT LUTH - LUTH-MVOLT	MVOLT 347* * Consult factory for details	30K - (3000K)	80	0-EMG-LED	MS-FM105 - High Frequency Occupancy Sensor	
4 - 4'			4' FIXTURE			35K - (3500K)			OCGSS - Cable Gripper Suspension Kit	
8 - 8'			2000L - (2000 lumens)			40K - (4000K)			OCVH - V Hook	
			3000L - (3000 lumens)			50K - (5000K)			USA - Made in America Compliance	
			4000L - (4000 lumens)						FSP-311-B-D - 0-10V continuous dimming PIR photo/ motion sensor with bluetooth control option.	
			8' FIXTURE							
4000L - (4000 lumens)										
6000L - (6000 lumens)										
8000L - (8000 lumens)										
WIRING OPTIONS										
FBF - Internal Fast Blow Fuse										
SBF - Internal Slow Blow Fuse										
RIS - Radio Interference Sensor										