


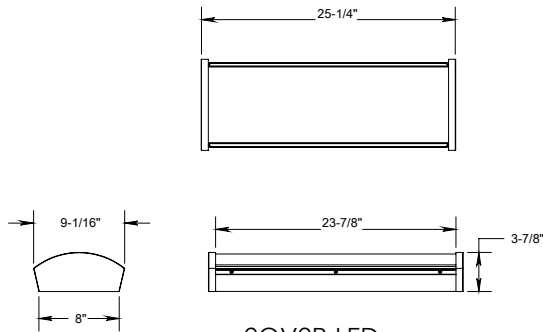

2OV2R-LED

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
5000	5019	39W
4000	4049	37W
3000	3004	32W
2500	2578	28W
1000	1022	11W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES

The OV2R is a vandal-resistant linear fixture for both wall and ceiling mount applications. Gasketed construction withstands harsh, high-impact conditions, including moisture, dust, and insects. Applications include security public, or high abuse areas, correctional facilities, institutions, schools, shopping centers, public buildings, and airports.

LUMENS	1000L, 2500L, 3000L, 4000L, 5000L
CCT	30K, 35K, 40K, 50K
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
LENGTH	2'
MOUNTING	Surface
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10)
EMERGENCY	10W - Up to 1000L output
LIFETIME	L70 at 100,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

This is the White Opal (70-80% Opaque) Diffuser polycarbonate lens with linear internal ribbed that provides uniform light distribution while obscuring lamp image and direct glare.

CONSTRUCTION

Die-formed heavy-gauge steel housing with white powder coat finish. Neoprene gasket eliminates moisture and dust, and repels insects. Integral, molded locking lugs reinforce retention screws. Drill points for maximum security. Vandal-resistant stainless steel hardware standard. Lens securely attached to body with stainless steel screws.

MOUNTING

Wall or ceiling mounting for indoor or outdoor locations. For continuous row mounting, please consult factory.

OPTIONS

Fixtures can be shipped pre-installed with daylight harvesting controls, occupancy sensors, and/or power pack. Optional emergency battery back-up shipped pre-installed and emergency push button is pre-installed on the fixture. Color-tuning technologies are also available: Tunable White, RGB+W, and Warm Dim. Please consult factory for details.

ELECTRICAL

Powered by constant-current LED drivers rated for 50 to 60Hz at 120-277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING

Standard 0-10V dimming on either 120 or 277V. Lutron dimming also available. Consult factory for dimmer compatibility.

WARRANTY

Five-year warranty for parts and components. (Labor not included).

LISTINGS

UL/C-UL listed to US and Canadian standard

Example: **2-OV2R-LED-1000L-DIM10-MVOLT-30K**

2	OV2R	LED							
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	
2 - 2'	OV2R Vandal Resistant Linear	LED	1000L 2500L 3000L 4000L 5000L	DIM10 - 0-10V Dimming	MVOLT 347* * Consult factory for details	30K 35K 40K 50K	85	O-EMG-LED-10W	
								WIRING OPTIONS FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Sensor	
									OTHER OPTIONS MS-FM105 - High Frequency Occupancy Sensor USA - Made in America Compliance