
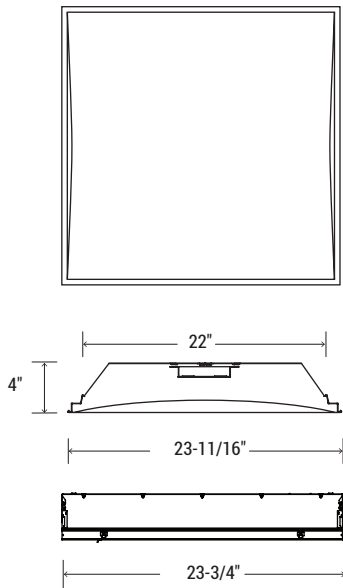


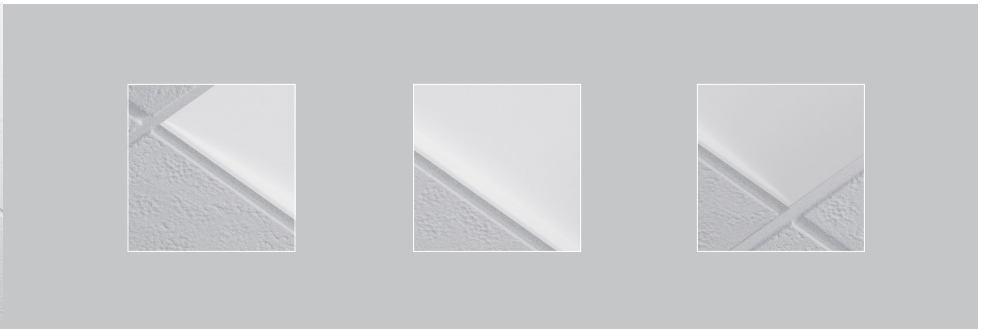

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
4000	3663	51 W
3000	2823	38 W
2000	1865	20 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

The luminaire mimics the appearance of a skylight, with its unique concave design, providing a soft, subtle, and contemporary look that complements any space. The luminaires can be grouped together in various patterns, giving the space a playful take on the visual experience. The glare-free illumination, high efficiency and sustainability of the luminaire makes it the ideal source for corporate offices, educational, healthcare, commercial, and retail applications.

LUMENS	2000, 3000, 4000
CCT & DYNAMIC PLATFORMS	30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	85+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	2'x2', 2'x4'
MOUNTING	Recessed
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUT2W, DIMST, ELDO10.1, ELDODMX.1, DALI.1
EMERGENCY	10W - Up to 1000L output (Bodine BSL310) 20W - Up to 2000L output (Bodine BSL20)
LIFETIME	L70 at 83,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



MAINTENANCE

The door frame assembly is hinged, allowing easy access to LED boards and driver compartment, locking into place for secure closure of the luminaire. LED engines and drivers are removable and upgradable even after luminaire installation. Luminaire can be regularly and safely wiped down to ensure optimal performance.

OPTICAL SYSTEM

The LED light engine is secured to the body of the luminaire, with the body acting as a heat sink. A proprietary design of the lens results in zero pixilation, regardless of the viewing angle, with LEDs placed to promote a uniform appearance. The result is even illumination across the space, from luminaire to luminaire.

CONSTRUCTION

Body is constructed of heavy-duty 20-gauge cold rolled steel, post-painted and engineered for maximum strength and extended life. All corners interlock to prevent aesthetic damage to the luminaire, with sides and corners uniformly turned in and hemmed to remove sharp edges for safe handling and easy installation. Luminaire is supplied with multiple wiring entrances for easy daisy chain of luminaires, to add power packs, whips, or other accessories in the field, or for continuous row mounting.

FINISH

Post-painted with a 93% reflective white coat to improve luminaire efficacy, with all body components seamlessly interlocked for added structural strength.

MOUNTING

Luminaires accommodate lay-in ceilings, Slot T, and T-bar suspension systems for 5/8" and 3/8" ceiling thicknesses. Four corner tie points are standard for safety wire support when required, with built-in earthquake clips, standard. Luminaires may be available with flange kits, surface mounted kits, and other options.

OPTIONS

Luminaires can be shipped pre-installed with whips, modular wiring systems, daylight harvesting controls, occupancy sensors, and/or power packs for individual or room control applications.

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input. Available in 347V., produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120, 277 or 347V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED driver (120V forward phase only).

LUTH - Lutron LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

DIMST - Step Dimming

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LED DYNAMIC PLATFORM OPTIONS

 Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)

 Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)

 RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

LISTINGS

c-UL-us - Listed for Feed Through Wiring.
Listed for DLC, California Title 24 compliant.

Example: **22-LITE-LED-4-3000L-DIM10-MVOLT-30K-85**

22	LITE	LED-4							
FIXTURE SIZE	SERIES	TYPE	LUMENS	DIMMING	VOLTAGE	CCT	CRI	EMERGENCY	OTHER OPTIONS
22 - 2' X2'	LITE - Fully Illuminated LED Troffer	LED-4	2000L - 2000 lumens 3000L - 3000 lumens 4000L - 4000 lumens	DIM10 - 0-10V Dimming DIMST - Step Dimming LUTH - Lutron HiLume LUT2W - Lutron 2Wire ELDO10.1 - EldoLED 0-10V DALI.1 - EldoLED DALI ELDODMX.1 - EldoLED DMX	MVOLT 347* 120 277	30K 35K 40K 50K	85	0-EMG-LED-10W 0-EMG-LED-20W	22FK - 2'x2' Flange Kit FBF - Internal Fast Blow Fuse SBF - Internal Slow Blow Fuse RIS - Radio Interference Suppressor USA - Made in America Compliance

*Consult factory for details

LUT2W are available in 120V only LUT2W up to 3000L

LUTH, ELDO10.1, ELDODALI.1, and ELDODMX.1 are available in 120V and 277V

-Reference last page for Control Options

22-LITE-LED-4-2000L-DIM10-MVOLT-40K-85

TEST NO.: **EL072619113**

INPUT WATTS: **25.2**

LUMENS: **1866**


CRI: **85**

EFFICACY: **74**

CCT: **4000K**

SPACING CRITERIA: **1.40**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	227.82	12.20	12.20
0-30	485.89	26.00	26.00
0-40	800.43	42.90	42.90
0-60	1435.39	76.90	76.90
0-80	1809.99	97.00	97.00
0-90	1847.28	99.00	99.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	1642	1663	1656
55	1608	1639	1631
65	1528	1584	1569
75	1324	1448	1428
85	972	1165	1105

Lumens Per Zone

Zone	Lumens
0-10	58.80
10-20	169.02
20-30	258.07
30-40	314.54
40-50	330.88
50-60	304.08
60-70	236.32
70-80	138.28
80-90	37.29

Candela Tabulation

0	0
0	621.168
5	619.140
15	600.410
25	562.190
35	505.540
45	431.880
55	343.120
65	240.200
75	127.430
85	31.510
90	1.150

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99			
	1	108	103	99	95	105	101	97	93	97	93	90	92	90	87	89	87	85	82			
	2	98	90	83	77	95	88	81	76	84	79	74	81	76	72	77	74	70	68			
	3	89	79	70	64	87	77	69	63	74	67	62	71	65	61	68	63	59	57			
	4	82	69	61	54	79	68	60	53	65	58	52	63	57	52	61	55	51	49			
	5	75	62	53	46	73	61	52	46	58	51	45	56	50	45	54	49	44	42			
	6	69	56	47	40	67	55	46	40	53	45	39	51	44	39	49	43	39	36			
	7	64	50	42	35	62	50	41	35	48	40	35	46	40	34	45	39	34	32			
	8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	31	29			
	9	56	42	34	28	54	41	34	28	40	33	28	39	32	28	38	32	27	26			
10	52	39	31	26	51	38	31	25	37	30	25	36	30	25	35	29	25	23				

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

22-LITE-LED-4-3000L-DIM10-MVOLT-40K-85

TEST NO.: **EL072619111**

INPUT WATTS: **37.8**

LUMENS: **2823**


CRI: **85**

EFFICACY: **75**

CCT: **4000K**

SPACING CRITERIA: **1.40**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	339.82	12.00	12.00
0-30	726.72	25.70	25.70
0-40	1198.22	42.40	42.40
0-60	2150.49	76.20	76.20
0-80	2716.73	96.20	96.20
0-90	2775.12	98.30	98.30

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	2441	2479	2449
55	2393	2447	2408
65	2302	2404	2338
75	1995	2201	2115
85	1416	1806	1507

Lumens Per Zone

Zone	Lumens
0-10	87.52
10-20	252.30
20-30	386.90
30-40	471.50
40-50	496.09
50-60	456.18
60-70	356.48
70-80	209.75
80-90	58.39

Candela Tabulation

0	0
0	924.614
5	921.220
15	892.140
25	835.570
35	751.060
45	642.090
55	510.480
65	361.910
75	192.080
85	45.890
90	3.420

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98			
	1	108	103	99	95	105	101	97	93	96	93	90	92	89	87	88	86	84	82			
	2	98	90	83	77	95	88	81	76	84	78	74	80	76	72	77	73	70	68			
	3	89	78	70	63	86	77	69	63	73	67	61	70	65	60	68	63	59	57			
	4	81	69	60	53	79	68	59	53	65	58	52	63	56	51	60	55	50	48			
	5	75	62	53	46	73	61	52	46	58	51	45	56	49	44	54	48	44	41			
	6	69	55	46	40	67	54	46	40	52	45	39	51	44	39	49	43	38	36			
	7	64	50	41	35	62	49	41	35	48	40	35	46	39	34	45	38	34	32			
	8	59	46	37	31	58	45	37	31	44	36	31	42	35	31	41	35	30	28			
	9	56	42	34	28	54	41	33	28	40	33	28	39	32	27	38	32	27	25			
10	52	39	31	25	51	38	30	25	37	30	25	36	29	25	35	29	25	23				

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

22-LITE-LED-4-4000L-DIM10-MVOLT-40K-85

TEST NO.: **EL072619112**

INPUT WATTS: **51.8**

LUMENS: **3663**


CRI: **85**

EFFICACY: **71**

CCT: **4000K**

SPACING CRITERIA: **1.40**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	444.95	12.10	12.10
0-30	949.02	25.90	25.90
0-40	1563.39	42.70	42.70
0-60	2813.00	76.80	76.80
0-80	3553.08	97.00	97.00
0-90	3626.41	99.00	99.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	3219	3251	3234
55	3161	3204	3187
65	3008	3106	3066
75	2649	2875	2830
85	1900	2292	2093

Lumens Per Zone

Zone	Lumens
0-10	114.87
10-20	330.08
20-30	504.08
30-40	614.37
40-50	650.68
50-60	598.93
60-70	466.01
70-80	274.07
80-90	73.33

Candela Tabulation

0	0
0	1213.423
5	1210.030
15	1173.180
25	1100.060
35	989.490
45	846.530
55	674.320
65	472.820
75	255.030
85	61.590
90	2.430

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

	RC	80%				70%				50%				30%				10%				0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	101	101	101	99			
	1	108	103	99	95	105	101	97	93	96	93	90	92	90	87	89	86	84	82			
	2	98	90	83	77	95	88	81	76	84	79	74	81	76	72	77	74	70	68			
	3	89	79	70	64	87	77	69	63	74	67	62	71	65	60	68	63	59	57			
	4	82	69	60	56	79	68	60	53	65	58	52	63	57	51	61	55	51	48			
	5	75	62	53	46	73	61	52	46	58	51	45	56	50	44	54	49	44	42			
	6	69	56	46	40	67	55	46	40	53	45	39	51	44	39	49	43	38	36			
	7	64	50	41	35	62	49	41	35	48	40	35	46	39	34	45	39	34	32			
	8	60	46	37	31	58	45	37	31	44	36	31	42	36	31	41	35	30	28			
	9	56	42	34	28	54	41	33	28	40	33	28	39	32	28	38	32	27	26			
10	52	39	31	25	51	38	31	25	37	30	25	36	30	25	35	29	25	23				