

T5 SLIM HIGH PERFORMANCE ARCHITECTURAL **COVE LUMINAIRE (2 LAMP)**







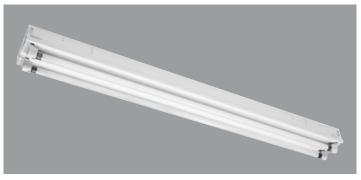



BALLAST FACTOR

(Blank) - Normal BF



APPLICATION:

Ideal for coves, shelves, displays or any other retail applications.

PRODUCT FEATURES:


- Exclusively designed for the T5 lamp, the OST5 utilizes small T5 sockets and T5 ballasts
- 2', 3' & 4' housings are designed to be surface, chain, or cable mounted in continuous rows or individually
- · Multiple knockouts allow for top side and back mounting
- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- · Exclusive T5 socket features rotating collar and enclosed contacts
- · Row mounting coupler supplied with all luminaires
- Lightweight design enables for guick, easy installation
- Thermally protected, re-setting, Class P NPF, non-PCB and UL listed ballast
- Suitable for dry and damp environments
- NEC required ballast disconnect is standard

LISTING

UL/C-UL listed to US and Canadian standard

Guaranteed for one year against mechanical defects Specifications subject to change without notice.

Ordering Information > Example: 3-OST5-2-21-T5-MVOLT-EMG-T5-T5HO-700

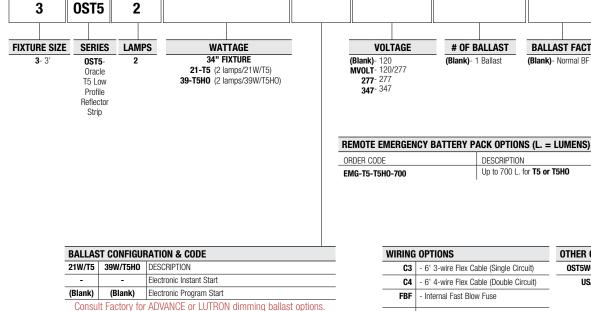

WIRING OPTIONS		OTHER OPTIONS	
C3	- 6' 3-wire Flex Cable (Single Circuit)	OST5WG	- Wireguard
C4	- 6' 4-wire Flex Cable (Double Circuit)	USA	- Made in America Compliance
FBF	- Internal Fast Blow Fuse		
SBF	- Internal Slow-Blow Fuse		

RIS - Radio Interference Suppressor