



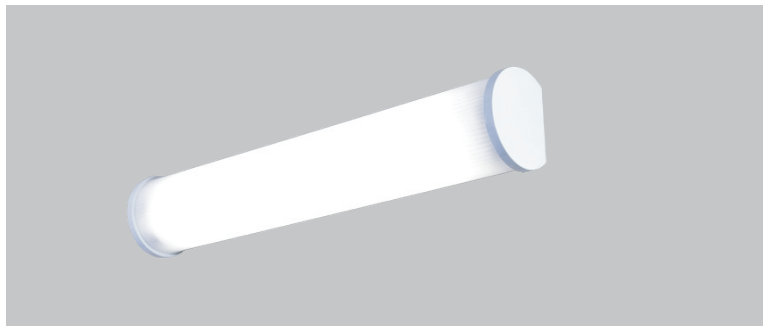

EASY 3 COLORS
SELECTOR
3000K • 4000K • 5000K

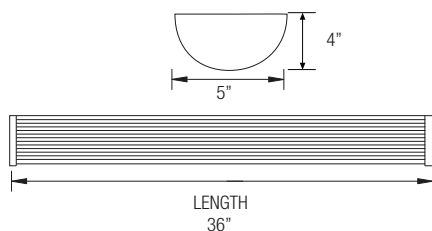

NOMINAL LUMENS	DELIVERED LUMENS	*WATTAGE
3000	3005	39 W

Based on 4000K, 85+ CRI. Actual wattage may vary +/- 5%

FEATURES

The OVL-LED CCT Select is a dimmable linear vanity light for either wall or vanity application. Easily adjust between three color temperatures in the field with a multi-CCT selector switch. Low-profile, streamlined design blends into any interior space. PMMA lens provides soft, comfortable illumination ideal for residential, commercial and hospitality applications.

LUMENS	3000
CCT & DYNAMIC PLATFORMS	30K/40K/50K
CRI	90+
COLOR QUALITY	3 Step MacAdam Ellipse
SIZE	3'
DIMMING & CONTROL	0-10V Flicker Free 1% Dimming Standard (DIM10) LUTH
WORKING TEMPERATURE	-20°C to 45°C (-4°F to 113°F)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21



OPTICS

PMMA lens provides soft, comfortable illumination. LED diodes are closely, evenly spaced from end-to-end for even illumination.

MULTI-LUMEN, MULTI-CCT SELECTOR SWITCHES

3-Color CCT selector switch is clearly visible and identifiable on the LED board for easy adjustability. Simply remove the diffuser and slide the button to easily switch between 30K/40K/50K in the field. Switch between a warmer 30K to a neutral white 40K to an alert 50K for different uses in one luminaire.

CONSTRUCTION

- Shipped with a clear prismatic diffuser standard and white end caps
- Diffuser can be easily removed via a locking nut at both ends of fixture
- Post-painted body and hemmed edges allow for safe handling and installation
- Lightweight body is easy to handle and install

MOUNTING

For wall or vanity application

DRIVER ELECTRICAL INFORMATION

Powered by high-quality constant-current power LED drivers which are rated for 50 to 60Hz at 120/277V input, produce less than 20% THD, and have a power factor of .90 to 1.00.

DIMMING & DRIVER INFORMATION

DIM10 - Flicker Free 1% Dimming Standard (DIM10) 0-10V dimming on either MVOLT 120 or 277.

WARRANTY

Five-year warranty for parts and components (labor not included).

LISTINGS

ETL Certified for US and Canada
Damp Location Listed
Energy Star
JA8

Example: **3-OVL-LED-3000L-DIM10-MVOLT-30K/40K/50K-90**

FIXTURE SIZE	PART NUMBER	LUMENS	DIMMING	VOLTAGE	CCT	CRI
3'	OVL-LED	3000L - 3000 lumens	DIM10 - 0-10V Dimming	MVOLT	30K/40K/50K	90