
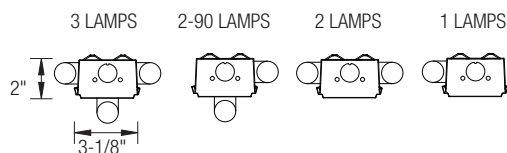


### T8/ T5 - FLUORESCENT SIDEMOUNT STYLE STRIP (1, 2 OR 3 LAMP)

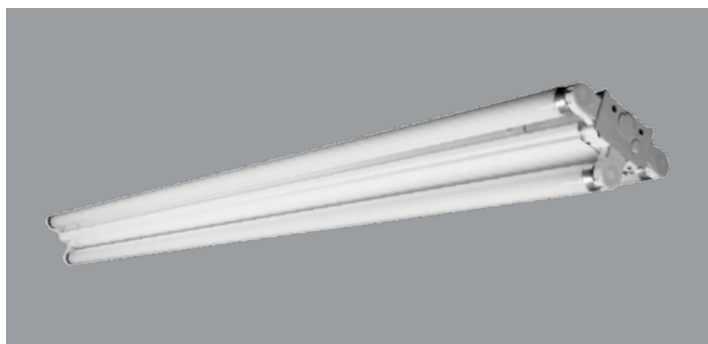

#### GENERAL DESCRIPTION:

An all-purpose economy fluorescent 1-light sidemount strip that can be adapted to be a double sidemount, right angle or 3-light strip.

#### PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial and industrial spaces where fixture depth is critical
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Snap-on ballast cover allows for easy maintenance and install
- End plates act as a coupler for continuous row mounting
- Knockouts included for conduit and chain hangers
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables for quick, easy installation and increases worker productivity

- CEE qualified ballast comes standard on most fixture options (Consult factory for details)
- NEC required ballast disconnect is standard

#### LISTING


UL/C-UL listed to US and Canadian standard

#### WARRANTY


Guaranteed for one year against mechanical defects

#### BODY SCHEMATIC FEATURES


- Pivot style end cap
- KO for V hook hanger
- KO for conduit

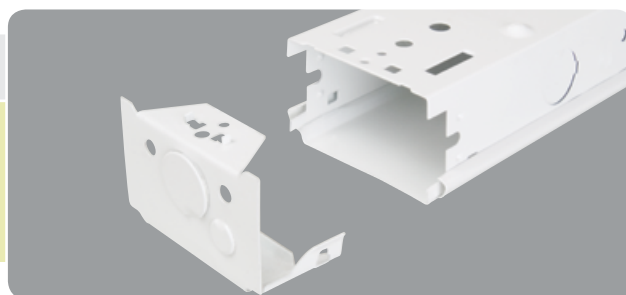

Strip Back Plans T8

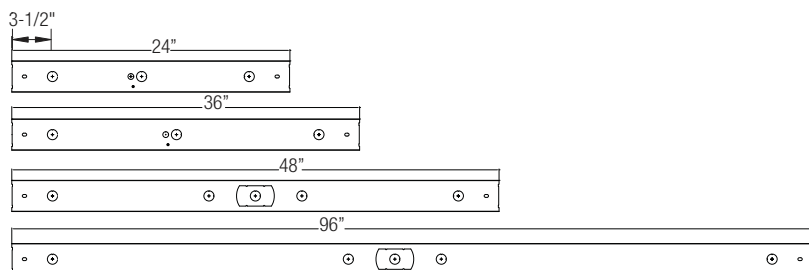

Strip Back Plans T5

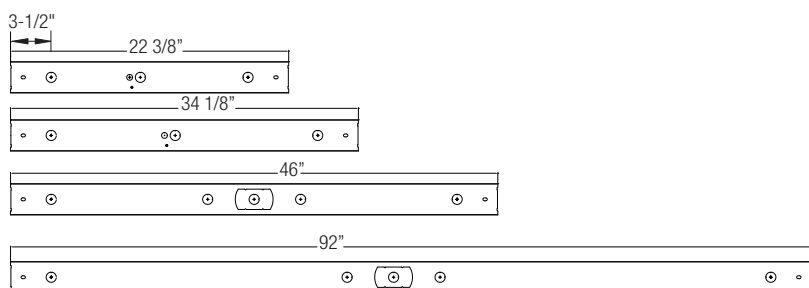

### T8/ T5 - FLUORESCENT SIDEMOUNT STYLE STRIP (1, 2 OR 3 LAMP)

Ordering Information > Example: 4-OCS-3-28-T5-MVOLT-EMG-T8-BX-700

|                     |                                      |  |  |                                               |                                     |                                                   |  |  |
|---------------------|--------------------------------------|--|--|-----------------------------------------------|-------------------------------------|---------------------------------------------------|--|--|
| <b>4</b>            | <b>OCS</b>                           |  |  |                                               |                                     |                                                   |  |  |
| <b>FIXTURE SIZE</b> | <b>SERIES</b>                        |  |  | <b>VOLTAGE</b>                                | <b># OF BALLAST</b>                 | <b>BALLAST FACTOR</b>                             |  |  |
| 4- 4'               | OCS-<br>Oracle<br>Sidemount<br>Strip |  |  | (Blank)- MVOLT (120/277)<br>120<br>277<br>347 | (Blank)- 1 Ballast<br>2- 2 Ballasts | (Blank)- Normal BF<br>HBF- High BF<br>LBF- Low BF |  |  |

| WATTAGE                  |                              |
|--------------------------|------------------------------|
| 4' FIXTURE               | 4' FIXTURE                   |
| 2-32-T8 (2 lamps/32W/T8) | 1-28-T5 (1 lamp/28W/T5)      |
| 3-32-T8 (3 lamps/32W/T8) | 2-28-T5 (2 lamps/28W/T5)     |
|                          | 2-54-T5HO (2 lamps/54W/T5HO) |
|                          | 3-28-T5 (3 lamps/28W/T5)     |
|                          | 3-54-T5HO (3 lamps/54W/T5HO) |

| EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS) |                                                |
|----------------------------------------------|------------------------------------------------|
| ORDER CODE                                   | DESCRIPTION                                    |
| EMG-T8-BX-450                                | Up to 450 L. for T8 or BX                      |
| EMG-T8-BX-600                                | Up to 600 L. for T8 or BX                      |
| EMG-T8-BX-700                                | Up to 700 L. for T8 or BX                      |
| EMG-T8-BX-1400                               | Up to 1400 L. for T8 or BX                     |
| EMG-T5-520                                   | Up to 520 L. for T5                            |
| EMG-T5-T5HO-700                              | Up to 700 L. for T5 or T5HO                    |
| EMG-T5-T5HO-1300                             | Up to 1300 L. for T5 or T5HO                   |
| EMG-SD-T8-BX-T5-T5HO-1400                    | Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO |
| EMG-ICE-T8-BX-T5-T5HO-1400                   | ICE Pack 1400 L. for T8, BX, T5 or T5HO        |
| GTD                                          | Generator Transfer Device                      |

#### SOCKET POSITIONING



-1 Lamp



- 2 Lamps



- 2-90 Lamps



- 3 Lamps

#### WIRING OPTIONS

|            |                                         |
|------------|-----------------------------------------|
| <b>C3</b>  | - 6' 3-wire Flex Cable (Single Circuit) |
| <b>C4</b>  | - 6' 4-wire Flex Cable (Double Circuit) |
| <b>FBF</b> | - Internal Fast Blow Fuse               |
| <b>SBF</b> | - Internal Slow-Blow Fuse               |
| <b>RIS</b> | - Radio Interference Suppressor         |

#### OTHER OPTIONS

|              |                                |
|--------------|--------------------------------|
| <b>OCMS</b>  | - Motion Sensor                |
| <b>OCVH</b>  | - V Hook and Chain Kit         |
| <b>OCGSS</b> | - Cable Gripper Suspension Kit |
| <b>USA</b>   | - Made in America Compliance   |

| BALLAST CONFIGURATION & CODE |                        |                      |                          |
|------------------------------|------------------------|----------------------|--------------------------|
| 32W/T8                       | 28W/T5                 | 54W/T5HO             | DESCRIPTION              |
| (Blank) <sup>3</sup>         | -                      | -                    | Electronic Instant Start |
| EPS <sup>3</sup>             | (Blank) <sup>1,2</sup> | (Blank) <sup>3</sup> | Electronic Program Start |

1- Requires 2 Ballasts for 3 or 4-lamps.

2- Requires 3 Ballasts for 6-lamps.

3- Requires 2 Ballasts for 6-lamps.

For dimming ballast Consult Factory