


### T8/T5 - 2', 4' & 8' INDUSTRIAL FLUORESCENT WRAP AROUND (2, 3 OR 4 LAMP)

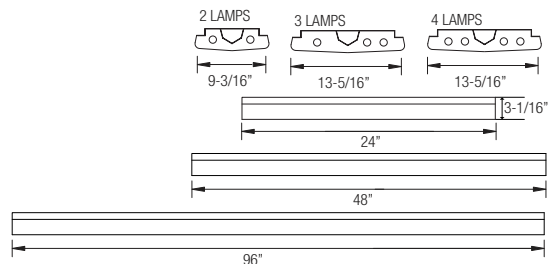

#### APPLICATION:

Ideal for general office lighting, corridors, educational institutions, hospitals, and retail.

#### PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Provides even illumination up to 180 degrees
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial, industrial and residential spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Lightweight design enables for quick, easy installation
- Individual or continuous row mounting
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

**LENS** - Prismatic acrylic Lens

#### LISTING

UL/C-UL listed to US and Canadian standards

#### WARRANTY

Limited 5 Years Warranty

### Ordering Information > Example: 4-OIW-2-28-T5-ADV-10-MVOLT-EMG-T8-BX-700

4	OIW						
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE <sup>3</sup>	# OF BALLAST	BALLAST FACTOR	EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)	
4 - 4'	OIW-Oracle Industrial Wrap Around	4' FIXTURE 2-28-T5 (2 lamps/28W/T5) 2-54-T5HO (2 lamps/54W/T5HO) 3-28-T5 (3 lamps/28W/T5) 3-54-T5HO (3 lamps/54W/T5HO) 4-28-T5 (4-lamps/28W/T5) 2-32-T8 (2 lamps/32W/T8) 3-32-T8 (3 lamps/32W/T8) 4-32-T8 (4-lamps/32W/T8)	120- 120 MVOLT- (120/277) 277- 277 347- 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF		
EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)							
ORDER CODE				DESCRIPTION			
EMG-T8-BX-450				Up to 450 L. for T8 or BX			
EMG-T8-BX-600				Up to 600 L. for T8 or BX			
EMG-T8-BX-700				Up to 700 L. for T8 or BX			
EMG-T8-BX-1400				Up to 1400 L. for T8 or BX			
EMG-T5-T5HO-700				Up to 700 L. for T5 or T5HO			
EMG-T5-T5HO-1300				Up to 1300 L. for T5 or T5HO			
EMG-SD-T8-BX-T5-T5HO-1400				Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO			
EMG-ICE-T8-BX-T5-T5HO-1400				ICE Pack 1400 L. for T8, BX, T5 or T5HO			
GTD				Generator Transfer Device			

BALLAST CONFIGURATION & CODE			
32W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank) <sup>1</sup>	-	-	Electronic Instant Start
EPS <sup>2</sup>	EPS <sup>3</sup>	(Blank)	Electronic Program Start

1. Requires 2 ballasts for 6 and 8-lamp fixture.
  2. Requires 2 ballasts for 6-lamp fixture and 3 ballasts for 8-lamp fixture.
  3. Requires 3 ballasts for 6-lamp fixture and 4 ballasts for 8-lamp fixture.
- Consult Factory for ADVANCE or LUTRON dimming ballast options.