
T5 SLIM HIGH PERFORMANCE ARCHITECTURAL **COVE LUMINAIRE (1 LAMP)**













APPLICATION:

Ideal for coves, shelves, displays or any other retail applications.

PRODUCT FEATURES:


- Exclusively designed for the T5 lamp, the OST5 utilizes small T5 sockets and T5 ballasts
- 2', 3' & 4' housings are designed to be surface, chain, or cable mounted in continuous rows or individually
- Multiple knockouts allow for top side and back mounting
- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Post-painted to insure against exposed metal surfaces
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Exclusive T5 socket features rotating collar and enclosed contacts
- Row mounting coupler supplied with all luminaires
- Lightweight design enables for quick, easy installation
- Thermally protected, re-setting, Class P NPF, non-PCB and UL listed ballast
- Suitable for dry and damp environments
- · NEC required ballast disconnect is standard

LISTING

UL/C-UL listed to US and Canadian standard

Guaranteed for one year against mechanical defects Specifications subject to change without notice

Ordering Information > Example: 4-OST5-1-28-T5-MVOLT-EMG-T5-T5HO-700

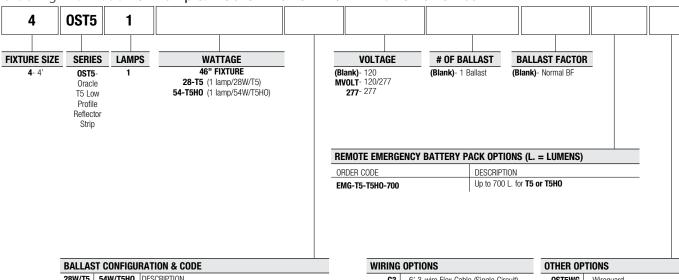

BALLAST CONFIGURATION & CODE				
28W/T5	54W/T5H0	DESCRIPTION		
-	-	Electronic Instant Start		
(Blank)	(Blank)	Electronic Program Start		
Consult Factory for ADVANCE or LUTRON dimming ballast options.				

WIRING OPTIONS				
C3	- 6' 3-wire Flex Cable (Single Circuit)			
C4	- 6' 4-wire Flex Cable (Double Circuit)			
FBF	- Internal Fast Blow Fuse			
SBF	- Internal Slow-Blow Fuse			
RIS	- Radio Interference Suppressor			

OTHER OF HUNG		
OST5WG	- Wireguard	
USA	- Made in America Compliance	

T5 **0ST5**