
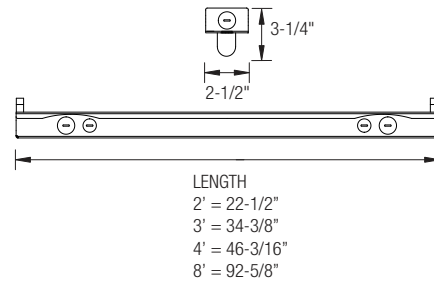


T5 FLUORESCENT STRIP NARROW BODY (1 OR 2 LAMP)

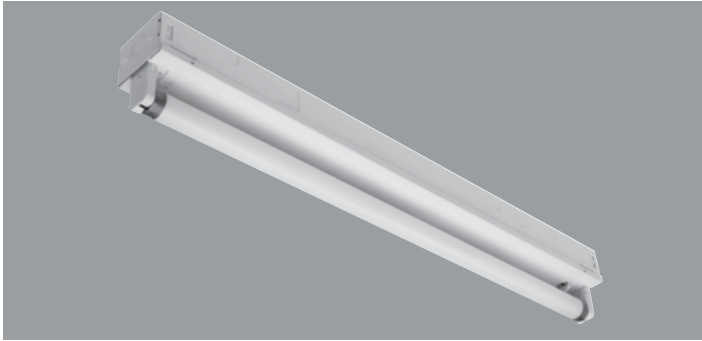

PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables for quick, easy installation
- Quarter-turn fastener secures ballast cover to housing
- NEC required ballast disconnect is standard

LISTING

UL/C-UL listed to US and Canadian standard

WARRANTY

Guaranteed for one year against mechanical defects

Ordering Information > Example: 8-OCN-2-28-T5-MVOLT-EMG-T5HO-700

8	OCN						
FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE ²	# OF BALLAST	BALLAST FACTOR		
8- 8'	OCN-Oracle Channel Narrow Body Open Strip	8' TANDEM FIXTURE 2-28-T5 (2 lamps/28W/T5) 2-54-T5HO (2 lamps/54W/T5HO)	(Blank)- MVOLT (120/277) 120 277 347	(Blank)- 1 Ballast 2- 2 Ballasts	(Blank)- Normal BF HBF- High BF LBF- Low BF		

BALLAST CONFIGURATION & CODE

28W/T5	54W/T5HO	DESCRIPTION
-	-	Electronic Instant Start
(Blank)	(Blank)	Electronic Program Start
-	ADV-7	Advance Mark-7 ¹
-	ADV-10	Advance Mark-10 ¹
ADV-OPT	-	Advance Optanium ¹
-	-	Advance Essential ¹
-	ADV-ROVR	Advance Rover ¹
LUT-EHD	LUT-EHD	Lutron Ecosystem H-Series ¹
-	-	Lutron Tu-Wire ¹
LUT-EC5	-	Lutron Ecosystem ¹
LUT-EC3	LUT-EC3	Lutron Eco-10
-	-	Lutron Tve ¹
LUT-H3D	LUT-H3D	Lutron Hi-Lume 3D ¹
-	LUT-ECD	Lutron Ecosystem (347V Only) ¹

¹ - Voltage must be specified for dimming ballast.

REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

WIRING OPTIONS

C3	- 6' 3-wire Flex Cable (Single Circuit)
C4	- 6' 4-wire Flex Cable (Double Circuit)
FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

OTHER OPTIONS

20CNWG	- 2' Wireguard
30CNWG	- 3' Wireguard
40CNWG	- 4' Wireguard
80CNWG	- (2) 4' Wireguards
OCNMS	- Motion Sensor
OCNVH	- V Hook and Chain Kit
OCNGSS	- Cable Gripper Suspension Kit
USA	- Made in America Compliance