
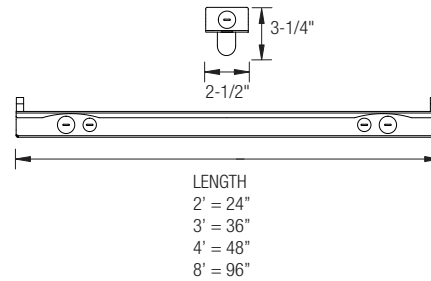


### T8 FLUORESCENT STRIP NARROW BODY (1 OR 2 LAMP)

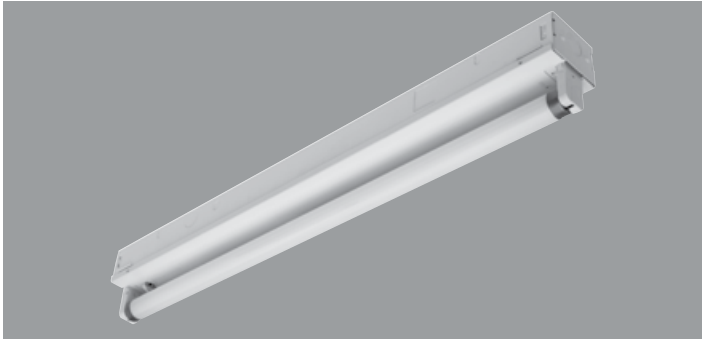

#### PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial and industrial spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Suitable for surface or suspended mounting
- Individual or continuous row mounting
- Lightweight design enables for quick, easy installation
- Quarter-turn fastener secures ballast cover to housing
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

#### LISTING

UL/C-UL listed to US and Canadian standard

#### WARRANTY

Guaranteed for one year against mechanical defects

T8  
OCN

#### Ordering Information > Example: 8-OCN-1-32-T8-MVOLT-EMG-T8-BX-700

| 8            | OCN                                                       |                                                                                               |                                               |                                     |                                                   |  |  |  |
|--------------|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------|-----------------------------------------------|-------------------------------------|---------------------------------------------------|--|--|--|
| FIXTURE SIZE | SERIES                                                    | WATTAGE                                                                                       | VOLTAGE <sup>2</sup>                          | # OF BALLAST                        | BALLAST FACTOR                                    |  |  |  |
| 8- 8'        | OCN-<br>Oracle<br>Channel<br>Narrow<br>Body Open<br>Strip | 8' TANDEM FIXTURE<br>1-59-T8 (1 lamp/59W/T8)<br>8' TANDEM FIXTURE<br>2-32-T8 (2 lamps/32W/T8) | (Blank)- MVOLT (120/277)<br>120<br>277<br>347 | (Blank)- 1 Ballast<br>2- 2 Ballasts | (Blank)- Normal BF<br>HBF- High BF<br>LBF- Low BF |  |  |  |

#### BALLAST CONFIGURATION & CODE

| 32W/T8   | 59W/T8  | DESCRIPTION                               |
|----------|---------|-------------------------------------------|
| (Blank)  | (Blank) | Electronic Instant Start                  |
| EPS      | -       | Electronic Program Start                  |
| ADV-7    | -       | Advance Mark-7 <sup>1</sup>               |
| ADV-10   | -       | Advance Mark-10 <sup>1</sup>              |
| -        | -       | Advance Optanium <sup>1</sup>             |
| ADV-ESS  | -       | Advance Essential <sup>1</sup>            |
| ADV-ROVR | -       | Advance Rover <sup>1</sup>                |
| LUT-EHD  | -       | Lutron Ecosystem H-Series <sup>1</sup>    |
| LUT-2W   | -       | Lutron Tu-Wire <sup>1</sup>               |
| LUT-EC5  | -       | Lutron Ecosystem <sup>1</sup>             |
| LUT-EC3  | -       | Lutron Eco-10 <sup>1</sup>                |
| LUT-TVE  | -       | Lutron Tve <sup>1</sup>                   |
| LUT-H3D  | -       | Lutron Hi-Lume 3D <sup>1</sup>            |
| -        | -       | Lutron Ecosystem (347V Only) <sup>1</sup> |

<sup>1</sup> - Voltage must be specified for dimming ballast.

#### REMOTE EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

| ORDER CODE                 | DESCRIPTION                                    |
|----------------------------|------------------------------------------------|
| EMG-T8-BX-450              | Up to 450 L. for T8 or BX                      |
| EMG-T8-BX-600              | Up to 600 L. for T8 or BX                      |
| EMG-T8-BX-700              | Up to 700 L. for T8 or BX                      |
| EMG-T8-BX-1400             | Up to 1400 L. for T8 or BX                     |
| EMG-SD-T8-BX-T5-T5H0-1400  | Self-Diagnostic 1400 L. for T8, BX, T5 or T5H0 |
| EMG-ICE-T8-BX-T5-T5H0-1400 | ICE Pack 1400 L. for T8, BX, T5 or T5H0        |
| GTD                        | Generator Transfer Device                      |

#### WIRING OPTIONS

|     |                                         |
|-----|-----------------------------------------|
| C3  | - 6' 3-wire Flex Cable (Single Circuit) |
| C4  | - 6' 4-wire Flex Cable (Double Circuit) |
| FBF | - Internal Fast Blow Fuse               |
| SBF | - Internal Slow-Blow Fuse               |
| RIS | - Radio Interference Suppressor         |

#### OTHER OPTIONS

|        |                                |
|--------|--------------------------------|
| 20CNWG | - 2' Wireguard                 |
| 30CNWG | - 3' Wireguard                 |
| 40CNWG | - 4' Wireguard                 |
| 80CNWG | - (2) 4' Wireguards            |
| OCNMS  | - Motion Sensor                |
| OCNVH  | - V Hook and Chain Kit         |
| OCNGSS | - Cable Gripper Suspension Kit |
| USA    | - Made in America Compliance   |

8' Fluorescent Narrow Body Strip