


T8/T5 - 2', 4' & 8' INDUSTRIAL FLUORESCENT  
WRAP AROUND (4 LAMP)

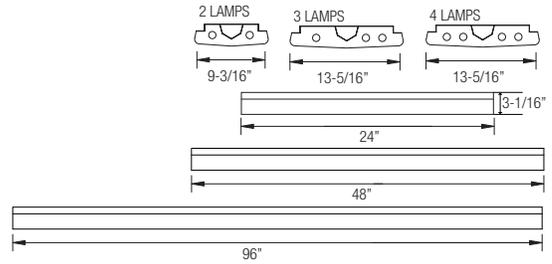

### APPLICATION:

Ideal for general office lighting, corridors, educational institutions, hospitals, and retail.

### PRODUCT FEATURES:

- Heavy-duty 20-gauge steel utilized throughout for durability and code compliance
- Pretreated with five-stage iron phosphate process to ensure superior paint adhesion
- Provides even illumination up to 180 degrees
- Painted high-gloss baked white enamel
- Shallow design is ideal for commercial, industrial and residential spaces requiring general illumination
- Suitable for dry and damp environments
- Thermally protected, self-resetting, Class P, NPF, non-PCB and UL listed ballast
- Lightweight design enables for quick, easy installation
- Individual or continuous row mounting
- NEC required ballast disconnect is standard
- CEE qualified ballast comes standard on most fixture options (Consult factory for details)

**LENS** - Prismatic acrylic Lens

### LISTING

UL/C-UL listed to US and Canadian standards

### WARRANTY

Guaranteed for one year against mechanical defects

T8/T5  
OIW

### Ordering Information > Example: 8-OIW-8-28-T5-ADV-10-MVOLT-EMG-T8-BX-700

8	OIW							
---	-----	--	--	--	--	--	--	--

FIXTURE SIZE	SERIES	WATTAGE	VOLTAGE <sup>3</sup>	# OF BALLAST	BALLAST FACTOR
8 - 8'	OIW-Oracle Industrial Wrap Around	<b>8' TANDEM FIXTURE</b> 4-28-T5 (4-lamps/28W/T5) 4-54-T5HO (4-lamps/54W/T5HO) 4-32-T8 (4-lamps/32W/T8)	120- 120 MVOLT- (120/277) 277- 277 347- 347	(Blank) - 1 Ballast 2 - 2 Ballasts	(Blank) - Normal BF HBF - High BF LBF - Low BF

BALLAST CONFIGURATION & CODE			
32W/T8	28W/T5	54W/T5HO	DESCRIPTION
(Blank) <sup>1</sup>	-	-	Electronic Instant Start
EPS <sup>2</sup>	EPS <sup>3</sup>	(Blank)	Electronic Program Start

1. Requires 2 ballasts for 6 and 8-lamp fixture.
  2. Requires 2 ballasts for 6-lamp fixture and 3 ballasts for 8-lamp fixture.
  3. Requires 3 ballasts for 6-lamp fixture and 4 ballasts for 8-lamp fixture.
- Consult Factory for ADVANCE or LUTRON dimming ballast options.

### EMERGENCY BATTERY PACK OPTIONS (L. = LUMENS)

ORDER CODE	DESCRIPTION
EMG-T8-BX-450	Up to 450 L. for T8 or BX
EMG-T8-BX-600	Up to 600 L. for T8 or BX
EMG-T8-BX-700	Up to 700 L. for T8 or BX
EMG-T8-BX-1400	Up to 1400 L. for T8 or BX
EMG-T5-T5HO-700	Up to 700 L. for T5 or T5HO
EMG-T5-T5HO-1300	Up to 1300 L. for T5 or T5HO
EMG-SD-T8-BX-T5-T5HO-1400	Self-Diagnostic 1400 L. for T8, BX, T5 or T5HO
EMG-ICE-T8-BX-T5-T5HO-1400	ICE Pack 1400 L. for T8, BX, T5 or T5HO
GTD	Generator Transfer Device

### WIRING OPTIONS

FBF	- Internal Fast Blow Fuse
SBF	- Internal Slow-Blow Fuse
RIS	- Radio Interference Suppressor

### OTHER OPTIONS

INMS	- Motion Sensor
USA	- Made in America Compliance

Commercial Fluorescent Wrap Around