

ELX-615

Photoluminescent Exit Sign

Architectural

Catalog Number:	
Project Name:	Type:
Note:	MAXILUME ARCHITECTURAL LIGHTING



FEATURES
Photoluminescent exit signs are the most reliable exit signs offered today. They require no external energy source, no electrical wiring or batteries and are always ready to provide an effective, maintenance free exit marking system. 25 Years + Life expectancy.

BODY

- UV-stabilization prevents discoloration of the product.
- Die-cast aluminum housing of the product makes it explosion-proof, weatherproof and scratch-and impact-resistant.

FACE


- Single or dual configuration.
- Letter-shaped light tubes provide the best light in the industry

MOUNTING

- Unique "snap-together" universal mounting design permits top, back and side mounting. Necessary hardware and canopy are provided electrical

LISTED

- Damp location approved
- Per UL 924: Activation requires a minimum of 5-foot candles (54 lux) of unfiltered fluorescent lighting for 60 minutes.
- UL924 providing a viewing distance of 50 feet at 90 minutes duration.
- Also suited for floor proximity use (UL1994)

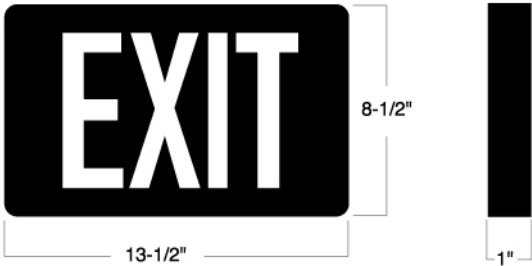

ELX-615 - ITEM SELECTOR: (Please check the boxes below for the option desired)

FACE COLOR	NUMBER OF FACE
☐ G - Green	☐ 1 - FACE
☐ R - Red	
☐ B - Black	

Specified:
ELX-615 _____ - _____
FACE COLOR NO. OF FACE

