

ELX-635

New York City Approved LED Aluminum Edge-Lit Exit Sign with Battery Back-up

Architectural Exit Sign

Catalog Number:

Project Name:

Note:

Type:



ILLUMINATION

- Ultra bright, energy efficient, long life Red LED.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.
- New York City compliant 8" EXIT letters.

ELECTRICAL

- Dual 120/277 voltage standard. Optional multi-tap 208/220/240 voltage available.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCad battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Aluminum mounting canopy included for top, end or back mount.

HOUSING


- Premium-grade, extruded aluminum housing (also available in black or white powder-coated finishes).
- Self-adhesive chevron appliques and guide template provided for directional indication.

OPTION

- **SDT:** Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.
- **SPV:** UL Listed for special voltage option.

WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).

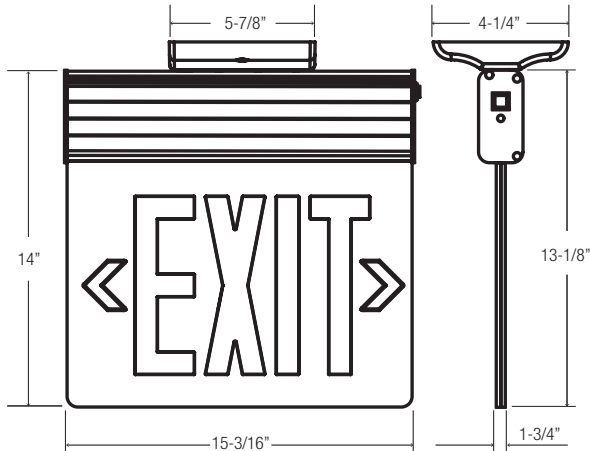

ELX-635 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR	HOUSING COLOR	PANEL COLOR	NO. OF FACE	BATTERY	OPTION
☐ R - Red	☐ AL - Aluminum ☐ W - White ☐ B - Black	☐ CL - Clear ☐ MR - Mirror ☐ W - White	☐ 1 - Face ☐ 2 - Face	☐ EM - Emergency Back-up	☐ SDT - Self-Diagnostic (EM option only) ☐ SPV - 208/220/240V (50/60 Hz)

SPECIFIED:

ELX-635

LETTER COLOR

HOUSING COLOR

PANEL COLOR

NO. OF FACE

BATTERY

OPTION