

ELX-720

Wet Location LED Exit/Emergency Light Combination with Battery Back-Up

Architectural

Catalog Number:

Project Name:

Type:

Note:

MAXILUME
ARCHITECTURAL LIGHTING



FEATURES

This wet location LED combo light is resistant to corrosive atmospheres, non-hazardous dust environments, water spray or splashing water. This product is an ideal when both an exit sign and an emergency light are required. A full range of manual adjustment is made possible by the swivel-and-point lamp-head design. If AC power is lost, the fixture provides at least 90 minutes of illumination and will automatically recharge after discharge. The operation of the product can easily be monitored and controlled with the use of a conveniently located test switch that indicates charge and diagnostic state. LED and PC circuits have a rating of about 25 years without a drop in illumination.

BODY

- The thermoplastic housing of the product makes it corrosion-proof and scratch-and impact-resistant.
- UV-stabilization prevents discoloration of the product.
- Every fixture includes a canopy, extra faceplate, and replaceable chevron directional indicator knockouts for control of direction.
- Components shaped by precision injection molding and has 1/2" knockouts for the supply of power.

FACE: EXIT

- 6" high text with color diffusion
- Knockout directional chevrons

MOUNTING

- Wall mounting

ELECTRICAL

- 120V or 277V Dual Input
- Normally uses 3.8 watts of power, 15 watts in emergency use

LIGHT SOURCE

- LED strips in times of normal functioning
- (2) 5.4W DC T5 wedge base lamps

BATTERY

- 6V 4.5 amp, sealed-lead acid battery
- Minimum 120 minutes of illumination
- Solid-state internal circuitry for charging

TESTING

- Test Button
- Indicator light shows high charge and readiness for operation

SAFEGUARDS OF CIRCUITRY


- Protected against short circuits and brown-outs
- Full discharge requires disconnection

LISTED

- Wet location
- UL listed for 10°C - 40°C

OPTIONS

- Internal heater for cold temperature applications lets the fixture work at the temperatures down to -10°C / 15°F

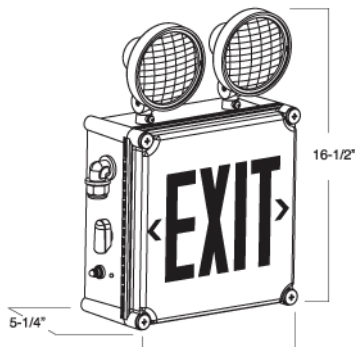

FOR
WET
LOCATION

ELX-720 - ITEM SELECTOR: (Please check the boxes below for the option desired)

LETTER COLOR

- ☐ **G** - Green
- ☐ **R** - Red

OPTIONS

- ☐ **HTR** - Internal Heater

Specified:

ELX-720

LETTER COLOR

OPTIONS

MAXILUME
ARCHITECTURAL LIGHTING

A division of
Elite Lighting

Submittal form is available @ www.maxilume.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions
subject to change without notice.

REV: MAXILUME-SPEC-03-10-2011