



TRIM OPTIONS




ROUND FLANGED




ROUND TRIMLESS



SQUARE FLANGED



SQUARE TRIMLESS

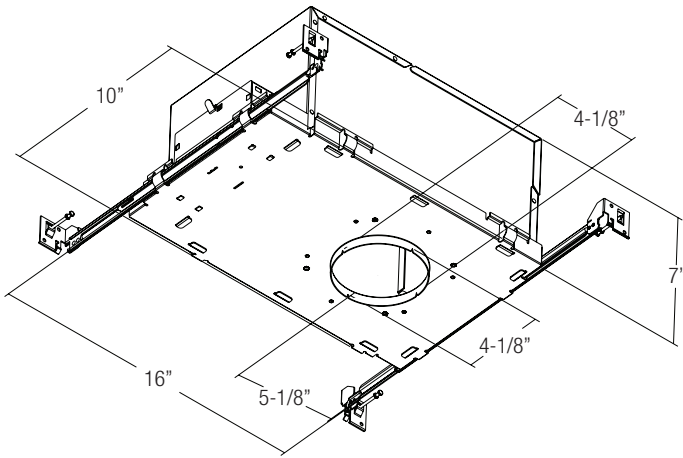

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
2000	2509	26 W
1500	1527	18 W
1200	1392	16 W
900	1037	12 W
700	881	10 W


Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES


A small aperture, architectural LED downlight that delivers the ultimate in uncompromised quality and performance, with precise, glare-free illumination, and unmatched flexibility. With the use of a single universal housing, it utilizes a multitude of trims, field changeable optics, and is fully adjustable to any beam angle, up to 45 degrees, with a full 365-degree horizontal rotation. Whether it's high-end architectural, hospitality, commercial, residential, or retail, the ER3 provides the most innovative solution to any design application that requires a small aperture.

LUMENS	700, 900, 1200, 1500, 2000 (Custom lumen packages available)
CCT & DYNAMIC PLATFORMS	27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	90+ Standard, 98+ Optional
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTIONS	WD (50-degree), MD (35-degree), and ND (25-degree)
TRIM OPTIONS	Downlight, Lensed Downlight, Wall Wash, Adjustable Accent, and Pinhole, Square and Round Trim and Trim-less Options
REFLECTOR COLORS	WH (White), CL (Chrome), SHZ (Satin Haze), BK (Black)
FLANGE COLORS	WH (White)
DIMMING	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUTFTB, LUT2W, ELD010.1, ELD0DMX.1, ELDODALI.1, DIMTR
EMERGENCY	10W - Up to 1000L Output (Bodine BSL310) 20W - Up to 2000L Output (Bodine BSL20)
LIFETIME	L70 at 102,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21
CCEA OPTION	For CCEA approved ER3 Family, please contact Elite Lighting for more information.


WD: WIDE
Candlepower Distribution Curve




MD: MEDIUM
Candlepower Distribution Curve



ND: NARROW
Candlepower Distribution Curve



WALL WASH
Candlepower Distribution Curve



Reference IES files for additional distribution curve information.



FLANGED OPTION

Post-painted powder coated Die-Cast trim ring available in white and custom colors (Please consult factory for custom paint color options). Collar and trim rotate jointly, and a Solite frosted lens is standard on all trims (Please consult factory for additional lens options). Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash. Trims attach to the housing with piano springs for snug fit and zero light leakage.

TRIM-LESS OPTION

Die-Cast perforated mesh cover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the luminaire opening to provide a seamless appearance. Trimless accessory is secured to the housing to prevent fractures in the ceiling and/or drywall during and after installation. Trims attach to the housing with piano springs for snug fit and zero light leakage. Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash.

HOUSING

Designed for new construction installations and suitable for Non IC applications. Thermally protected, specification grade adjustable recessed housing. For new construction insulated ceilings where housing will be in direct contact with insulation. die-formed all aluminum construction is painted matte black for maximum heat dissipation, rust protection and glare-free illumination.

MOUNTING

Pre-installed bar hangers allow housing to be positioned and locked at any point within a 24" joist span. They can be positioned on either the long or short axis of the housing and can be shortened for 12" joists. Bar hangers can fit onto T-Bar spline with additional slots and holes for special mounting methods, if necessary. Butterfly brackets are also provided and are constructed from 18-gauge steel and can be adjusted vertically. Butterfly brackets may be installed with 3/4" or 1-1/2" lathing channel, 1/2" EMT, or optional C-Channel mounting bars are available.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTINGS

c-UL-us - Listed for Wet Location if used with 1328 or 1307 Trims.
c-UL-us - Listed for Feed Through Wiring.
CP - City of Chicago Environmental Air (CCEA) marking for plenum applications (option).
Energy Star, JA8 and California Title 24 compliant.

LED DYNAMIC PLATFORM OPTIONS

 Tunable White with Smart White Technology utilizing the Lumenetix Platform allows you to color tune the luminaire via various controls. Create the perfect environment for the desired use of the space, while maintaining a CRI of 90+ across the tunable range of 8000 to 1650K. (Click here for more details)

 Dims to Warm with Smart Dimming Technology. At 100% full brightness the luminaire is at 3000K. When dimmed to 1%, the light transitions to 1800K, creating a warm ambiance within the space. (Click here for more details)

 RGB+White with Smart Hue Technology provides full color mixing of RGB and white colors. Utilizing the Lumenetix Platform allows you to choose from unlimited RGB color options, via various controls. Ideal for Circadian Rhythm applications or to create the perfect human centric environment. (Click here for more details)

DIMMING & DRIVER INFORMATION

DIM10 - 0-10V dimming on either MVOLT 120V or 277V, 347V. Dimmable down to 1% of initial lumens, standard.

DIMTR - Triac & Electronic low voltage dimming. Available in 120V.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED driver (120V forward phase only).

LUTH - Lutron LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology.

LUTFTB - Lutron PEQ0 Hi-Lume Premier Eco System. 0.1% dimming with Soft in Fade to Black dimming technology. Available on all luminaires up to 20 watts.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.


DALI - DALI DT6, DT8 dimming down to 1%. Available on all luminaires up to 100 watts.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%. Please see EldoLED website for wiring diagrams and a list of compatible DMX and Dali control systems.

The LED driver is rated for 50 to 60Hz at 120V/277V input, produces less than 20%THD, and has a power factor between 90% and 100%, and is thermally protected for additional safety. Junction box and Driver can be accessed from below the ceiling and above the ceiling. Junction Box is Listed for through branch circuit wiring.


OPTICS

Optical variation and choices allow for a custom solution to any application. Narrow at 25°, Medium at 35° and Wide at 50°.

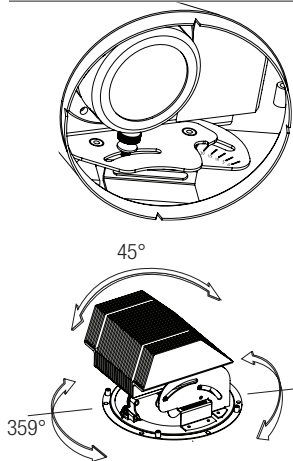


AIMING

Proprietary hot aiming system allows the lamp to be positioned at the perfect setting to ensure the proper position of the beam of light before trim is installed. Lamp holder is designed to ensure that the center beam of the light source emerges out of luminaire at any angled position from 0° to 45°.




365° HORIZONTAL LOCKING

Effortlessly rotates on a 365° horizontal rotational smooth slotted groove track system



TOOL-LESS ADJUSTABILITY






Of the luminaire is to ensure whatever position is desired up to 45 degrees the beam and maximum lumen power is exiting the luminaire accordingly









NUMERICAL DEGREE

Allows for the luminaires to be easily field adjusted for precision, performance, and versatility. At installation, you have the ability to lock the beam angle to 1 degree increments, which are marked at 5 degree increments.

Round Flanged Trim Options

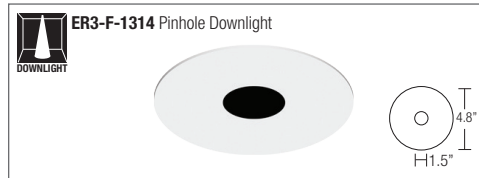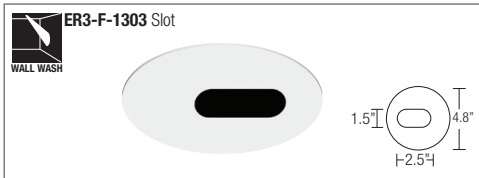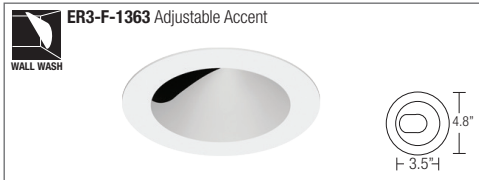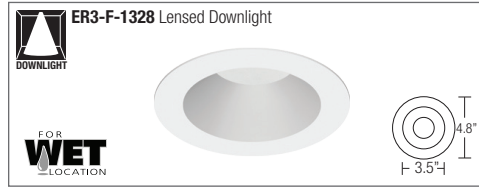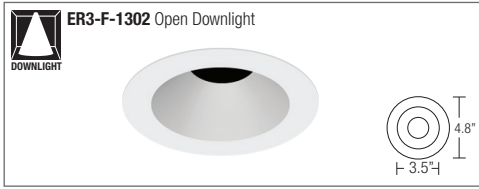

Round Trim-less Options

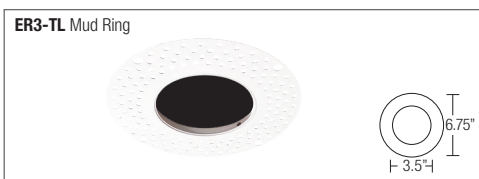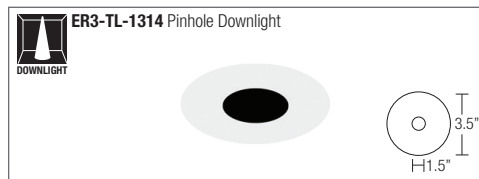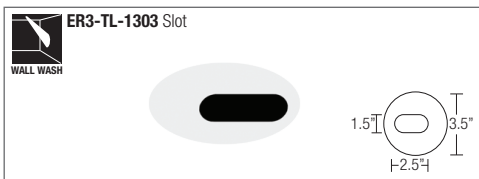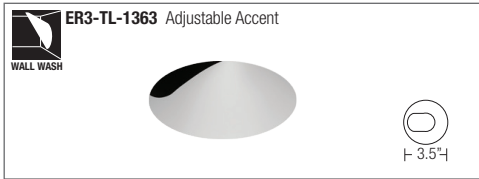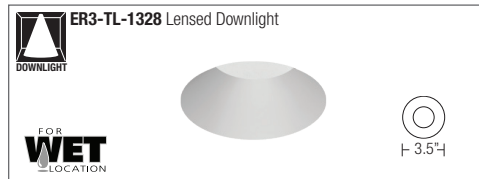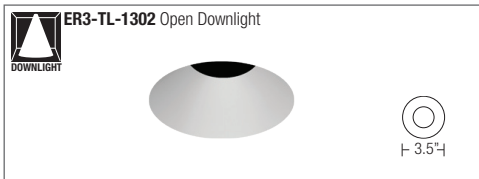

FLANGED OPTION:

Post-painted powder coated Die-Cast trim ring available in white and custom colors (Please consult factory for custom paint color options). Collar and trim rotate jointly, and a Solite frosted lens is standard on all trims (Please consult factory for additional lens options). Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash. Trims attach to the housing with piano springs for snug fit and zero light leakage.

FINISH



WH-White

CL-Chrome



SHZ-Satin Haze

BK-Black






TRIMLESS OPTION:

Die-Cast perforated mesh cover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the luminaire opening to provide a seamless appearance. Trimless accessory is secured to the housing to prevent fractures in the ceiling and/or drywall during and after installation. Trims attach to the housing with piano springs for snug fit and zero light leakage. Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash.






Note:

Additional lens filters must only be used on open non-lensed downlight trim options

Square Flanged Trim Options

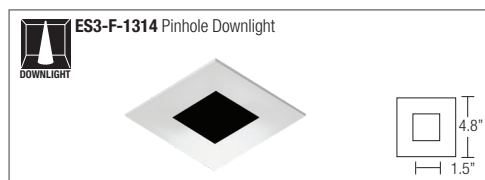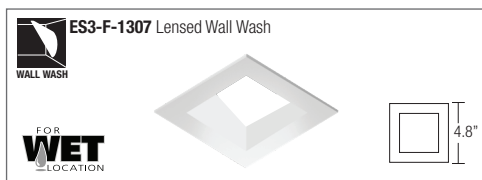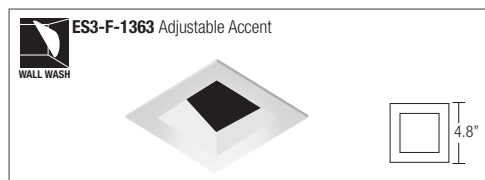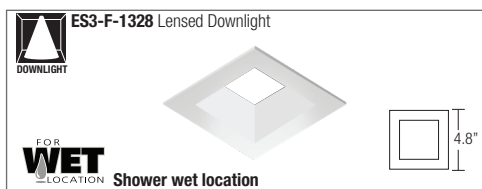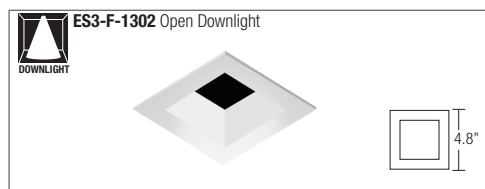

Square Trim-less Options

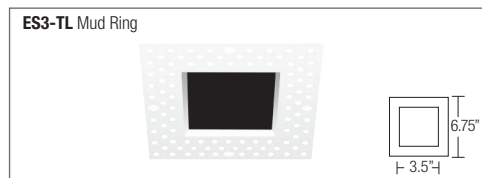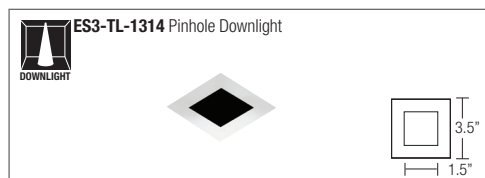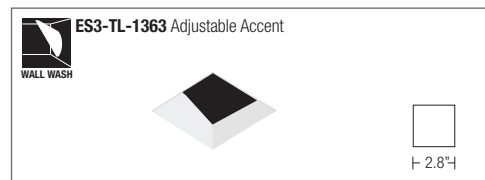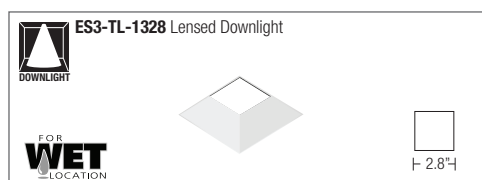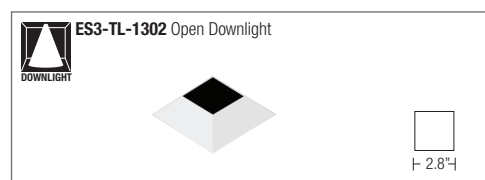

Square Trimless Option Only Offer With Ceiling Access

FLANGED OPTION:

Post-painted powder coated Die-Cast trim ring available in white and custom colors (Please consult factory for custom paint color options). Collar and trim rotate jointly, and a Solite frosted lens is standard on all trims (Please consult factory for additional lens options). Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash. Trims attach to the housing with piano springs for snug fit and zero light leakage.

FINISH



WH-White

CL-Chrome



SHZ-Satin Haze

BK-Black

TRIMLESS OPTION:

Die-Cast perforated mesh cover intended for installation in drywall or plaster ceilings. Mudding may be applied right up to the edge of the luminaire opening to provide a seamless appearance. Trimless accessory is secured to the housing to prevent fractures in the ceiling and/or drywall during and after installation. Trims attach to the housing with piano springs for snug fit and zero light leakage. Available in Open Downlight, Lensed Downlight, Pinhole Downlight, Slot, Adjustable Downlight Accent or Lensed Adjustable Wall Wash.

Note:

Additional lens filters must only be used on open non-lensed downlight trim options

ORDERING GUIDE

TYPE	LUMENS	DIMMING	VOLTAGE	OPTICS	CCT	CRI	EMERGENCY	OPTIONS
ER3-LED	☐ 700L ☐ 900L ☐ 1200L ☐ 1500L ☐ 2000L	☐ DIM10 ☐ DIMTR ☐ LUTH ☐ LUT2W ☐ ELD010.1 ☐ ELD0DALL.1 ☐ ELD0DMX.1 ☐ LUTFTB	☐ 120 ☐ 277 ☐ 347 (DIM10 only) ☐ MVOLT	☐ ND (25°) ☐ MD (35°) ☐ WD (50°)	☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K	☐ 90+ ☐ 98+	☐ EMG-LED-10W ☐ EMG-LED-20W Only accessible from the top of the luminaire	☐ Blank-Standard bar hangers (included) ☐ BP31 - 27" C-channel bar hangers. ☐ RIF - RIF filter. ☐ SF - Spray Foam suitable for insulation. (Consult factory for details) ☐ CP - CCEA Chicago plenum

- LUTFTB up to 1500L only. - LUT2W, DIMTR 120V only. - LUTH, ELD010.1, ELD0DALL.1, ELD0DMX.1 120-277V only.

TRIM OPTIONS

TRIM & TRIM-LESS OPTIONS

ROUND TRIM OPTIONS				
FLANGE-LESS TRIM OPTIONS		FINISH	LENS FILTERS	
☐ ER3-TL-1328* - Lensed Downlight (wet Location) ☐ ER3-TL-1307* - Lensed Wall Wash (wet Location) ☐ ER3-TL-1314** - Pinhole Downlight ☐ ER3-TL-1303* - Slot		☐ W- White ☐ CL- Chrome ☐ SHZ- Satin Haze ☐ BK- Black	☐ BP8MR16-FR - FROSTED ☐ BP8MR16-SF - SOFT FOCUS ☐ BP8MR16-CL - CLEAR ☐ BP8MR16-UV - ULTRAVIOLET ☐ 6BP8MR16-SP - SPREAD ☐ BPmr16-HC - HONEY COMB ☐ BPmr16-LI - LINEAR ☐ BPmr16-SOL - SOLITE Note: Additional lens filters must only be used on open non-lensed downlight trim options	
FLANGED TRIM OPTIONS				
☐ ER3-F-1328 - Lensed Downlight (wet Location) ☐ ER3-F-1307 - Lensed Wall Wash (wet Location) ☐ ER3-F-1314** - Pinhole Downlight ☐ ER3-F-1303** - Slot		☐ W-WH - White ☐ CL-WH - Chrome ☐ SHZ-WH - Satin Haze ☐ BK-WH - Black	☐ BP8MR16-BL - BLUE ☐ BP8MR16-GR - GREEN ☐ BP8MR16-PI - PINK ☐ BP8MR16-PU - PURPLE ☐ BP8MR16-DL - DAY LIGHT ☐ BP8MR16-YE - YELLOW ☐ BP8MR16-AM - AMBER ☐ BP8MR16-OR - ORANGE ☐ BP8MR16-RE - RED	


SQUARE TRIM OPTIONS				
FLANGE-LESS TRIM OPTIONS		FINISH	LENS FILTERS	
☐ ES3-TL-1328* - Lensed Downlight (wet Location) ☐ ES3-TL-1307* - Lensed Wall Wash (wet Location)		☐ W- White ☐ CL- Chrome ☐ SHZ- Satin Haze ☐ BK- Black	☐ BP8MR16-FR - FROSTED ☐ BP8MR16-SF - SOFT FOCUS ☐ BP8MR16-CL - CLEAR ☐ BP8MR16-UV - ULTRAVIOLET ☐ 6BP8MR16-SP - SPREAD ☐ BPmr16-HC - HONEY COMB ☐ BPmr16-LI - LINEAR ☐ BPmr16-SOL - SOLITE Note: Additional lens filters must only be used on open non-lensed downlight trim options	
FLANGED TRIM OPTIONS				
☐ ES3-F-1328 - Lensed Downlight (wet Location) ☐ ES3-F-1307 - Lensed Wall Wash (wet Location) ☐ ES3-F-1314** - Pinhole Downlight		☐ W-WH - White ☐ CL-WH - Chrome ☐ SHZ-WH - Satin Haze ☐ BK-WH - Black	☐ BP8MR16-BL - BLUE ☐ BP8MR16-GR - GREEN ☐ BP8MR16-PI - PINK ☐ BP8MR16-PU - PURPLE ☐ BP8MR16-DL - DAY LIGHT ☐ BP8MR16-YE - YELLOW ☐ BP8MR16-AM - AMBER ☐ BP8MR16-OR - ORANGE ☐ BP8MR16-RE - RED	

*Driver only accessible from the top of the luminaire when using Trim-less application. Square trimless option only offer with ceiling access.

**Pinhole and Slot are only available in black (Reflector) and white (Trim)


Emergency only accessible from the top of the luminaire

COLOR FILTERS & DISTRIBUTION FILTERS



MR16 LENS FILTER

CAT. #	COLOR
BP8MR16-BL	BLUE
BP8MR16-GR	GREEN
BP8MR16-PI	PINK
BP8MR16-PU	PURPLE
BP8MR16-DL	DAY LIGHT
BP8MR16-YE	YELLOW
BP8MR16-AM	AMBER
BP8MR16-OR	ORANGE
BP8MR16-RE	RED



MR16 SPECIALTY LENS FILTER

CAT. #	COLOR
1. BP8MR16-FR	FROSTED
2. BP8MR16-SF	SOFT FOCUS
3. BP8MR16-CL	CLEAR
4. BP8MR16-UV	ULTRAVIOLET
5. 6BP8MR16-SP	SPREAD
6. BPmr16-HC	HONEY COMB
7. BPmr16-LI	LINEAR
8. BPmr16-SOL	SOLITE

Note:
Additional lens filters must only be used on open non-lensed downlight trim options

*Please consult factory

ER3-LED-2000L-DIM10-MVOLT-WD-40K-90-ER3-F-1302

INPUT WATTS: **26.1**

LUMENS: **2470**

CRI: **85**


EFFICACY: **95**

CCT: **4000K**

TEST NO.: **EL121863**

SPACING CRITERIA: **0.60**

Candle Power Distribution (Candelas)



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1360.3	55.30	55.10
0-30	2024.81	82.30	82.00
0-40	2272.76	92.40	92.00
0-60	2405.25	97.80	97.40
0-80	2461.81	100.10	99.70
0-90	2469.64	100.40	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	45342	18162	17824
55	19143	19093	18666
65	18988	19335	18511
75	19045	18376	17174
85	19380	18299	7164

Lumens Per Zone

Zone	Lumens
0-10	470.29
10-20	890.00
20-30	664.52
30-40	247.95
40-50	88.70
50-60	43.79
60-70	34.60
70-80	21.95
80-90	7.83

Candela Tabulation

0	0
0	5714.33
5	4547.50
15	2450.90
25	976.82
35	325.32
45	146.35
55	50.12
65	36.63
75	22.50
85	7.71
90	0.31

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	50%	30%	10%	10%	50%	30%	10%	0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ROOM CAVITY RATIO	0	120	120	120	120	117	117	117	117	112	112	112	107	107	107	102	102	102	100	100
	1	114	111	109	107	112	109	107	105	105	104	102	102	100	99	98	97	96	94	94
	2	109	104	101	97	107	103	99	96	99	97	94	96	94	92	94	92	90	89	89
	3	104	98	94	90	102	97	93	89	94	91	88	92	89	86	88	83	80	79	79
	4	100	93	88	84	98	92	87	83	89	85	82	88	84	81	86	83	80	79	79
	5	95	88	82	79	94	87	82	78	85	81	78	84	80	77	82	79	76	75	75
	6	91	83	78	74	90	83	78	74	81	77	73	80	76	73	79	75	72	71	71
	7	88	79	74	70	87	79	74	70	78	73	70	76	72	69	75	72	69	68	68
	8	84	76	70	67	83	75	70	67	74	70	66	73	69	66	72	69	66	65	65
	9	81	73	67	64	80	72	67	64	71	67	63	70	66	63	70	66	63	62	62
	10	78	69	64	61	77	69	64	61	68	64	61	68	63	60	67	63	60	59	59

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

ER3-LED-2000L-DIM10-MVOLT-ND-40K-90-ER3-F-1302

INPUT WATTS: **26.3**

LUMENS: **2509**

CRI: **90**


EFFICACY: **95**

CCT: **4000K**

TEST NO.: **EL121757**

SPACING CRITERIA: **0.58**

Candle Power Distribution Curve



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1407.33	56.10	56.10
0-30	2069.01	82.50	82.50
0-40	2311.85	92.20	92.20
0-60	2443.04	97.40	97.40
0-80	2500.48	99.70	99.70
0-90	2509.64	100.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	17904	22527	97615
55	18517	17230	16554
65	18262	16858	15940
75	17589	16429	15955
85	16364	19229	19204

Lumens Per Zone

Zone	Lumens
0-10	494.96
10-20	913.27
20-30	661.68
30-40	242.83
40-50	87.20
50-60	43.99
60-70	35.07
70-80	22.36
80-90	8.17

Candela Tabulation

0	0
0	6066.90
5	5971.79
15	3718.82
25	1673.64
35	349.66
45	57.79
55	48.48
65	35.23
75	20.78
85	6.51
90	0.18

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	30%	50%	30%	10%	10%	50%	30%	10%	0%
RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100
	1	114	111	108	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94	94
	2	109	104	100	97	106	102	99	96	99	96	94	96	94	92	93	92	90	88	88
	3	104	98	93	90	102	97	92	89	94	90	88	92	89	86	89	87	85	83	83
	4	99	93	88	84	98	91	87	83	89	85	82	87	84	81	86	83	80	79	79
	5	95	88	82	79	94	87	82	78	85	81	78	83	80	77	82	79	76	75	75
	6	91	83	78	74	90	83	78	74	81	77	73	80	76	73	79	75	73	71	71
	7	88	79	74	70	86	79	74	70	78	73	70	77	72	69	75	72	69	68	68
	8	84	76	71	67	83	75	70	67	74	70	67	73	69	66	72	69	66	65	65
	9	81	73	67	64	80	72	67	64	71	67	64	70	66	63	70	66	63	62	62
	10	78	70	65	61	77	69	64	61	69	64	61	68	64	61	67	63	61	59	59

RC - Ceiling Cavity Reflectance

RW - Wall Reflectance

ER3-LED-2000L-DIM10-MVOLT-MD-40K-90-ER3-F-1302

INPUT WATTS: **26.1**

LUMENS: **2344**

CRI: **90**


EFFICACY: **90**

CCT: **4000K**

TEST NO.: **EL121860**

SPACING CRITERIA: **0.68**

Candle Power Distribution Curve



Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1193.19	50.90	50.90
0-30	1883.1	80.40	80.40
0-40	2140.51	91.30	91.30
0-60	2277.2	97.20	97.20
0-80	2335.52	99.70	99.70
0-90	2343.61	100.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	17982	20863	114503
55	18895	16794	16294
65	18314	16438	15826
75	17183	15972	15913
85	13951	18425	18802

Lumens Per Zone

Zone	Lumens
0-10	380.02
10-20	813.17
20-30	689.91
30-40	257.42
40-50	91.85
50-60	44.84
60-70	35.65
70-80	22.67
80-90	8.09

Candela Tabulation

0	0
0	4395.00
5	4228.22
15	3047.97
25	1638.42
35	256.84
45	58.04
55	49.47
65	35.33
75	20.30
85	5.55
90	0.18

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20


	RC	80%				70%				50%				30%			10%			0%
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
	1	114	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	94	
	2	108	103	100	96	106	102	98	95	99	96	93	96	93	91	93	91	89	88	
	3	103	97	92	88	101	96	91	88	93	89	86	91	88	85	88	86	84	82	
	4	99	91	86	82	97	90	85	82	88	84	81	86	83	80	84	81	79	77	
	5	94	86	81	77	93	85	80	76	84	79	76	82	78	75	80	77	74	73	
	6	90	82	76	72	89	81	76	72	79	75	71	78	74	71	77	73	70	69	
	7	86	78	72	68	85	77	72	68	76	71	68	75	70	67	73	70	67	66	
	8	83	74	68	65	81	73	68	64	72	67	64	71	67	64	70	66	64	62	
	9	79	70	65	61	78	70	65	61	69	64	61	68	64	61	67	63	61	59	
10	76	67	62	58	75	67	62	58	66	61	58	65	61	58	65	61	58	57		

ER3-LED-2000L-DIM10-MVOLT-MD-40K-90-ES3-F-1302

TEST NO.: **EL121862**

INPUT WATTS: **26** LUMENS: **1936** CRI: **90** EFFICACY: **74** CCT: **4000K** SPACING CRITERIA: **0.68**

Candle Power Distribution Curve



Cone of Light		
4.0	13.9 fc	12.2 ft
8.0	3.48 fc	24.4 ft
12.0	1.55 fc	36.7 ft
16.0	0.87 fc	48.9 ft
20.0	0.56 fc	61.1 ft
24.0	0.39 fc	73.3 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1116.62	57.70	57.70
0-30	1680.2	86.80	86.80
0-40	1828.04	94.40	94.40
0-60	1905.32	98.40	98.40
0-80	1932.74	99.80	99.80
0-90	1936.34	100.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	9508	12932	64160
55	11096	9419	8372
65	10005	9092	7703
75	8109	7948	7508
85	6912	9929	9904

Lumens Per Zone

Zone	Lumens
0-10	353.34
10-20	763.28
20-30	563.58
30-40	147.84
40-50	53.03
50-60	24.24
60-70	17.57
70-80	9.85
80-90	3.60

Candela Tabulation

0	0
0	4025.20
5	3908.31
15	2830.58
25	1106.38
35	61.04
45	30.69
55	29.05
65	19.30
75	9.58
85	2.75
90	0.09

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100
1	114	111	109	107	107	112	109	107	105	105	104	102	102	100	99	98	97	96	95	95	95	95	95	95
2	109	105	101	98	98	107	103	100	97	100	97	95	97	95	93	94	92	91	89	89	89	89	89	89
3	105	99	94	91	91	103	97	93	90	95	91	89	92	90	87	90	88	86	85	85	85	85	85	85
4	100	93	89	85	85	98	92	88	84	90	86	83	88	85	82	87	84	82	80	80	80	80	80	80
5	96	89	84	80	80	95	88	83	80	86	82	79	85	81	78	83	80	78	76	76	76	76	76	76
6	92	84	79	76	76	91	84	79	75	82	78	75	81	77	74	80	76	74	73	73	73	73	73	73
7	89	81	75	72	72	87	80	75	72	79	74	71	78	74	71	77	73	70	69	69	69	69	69	69
8	85	77	72	68	68	84	76	72	68	75	71	68	74	70	68	74	70	67	66	66	66	66	66	66
9	82	74	69	65	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63	63	63
10	79	71	66	62	62	78	70	65	62	70	65	62	69	65	62	68	64	62	61	61	61	61	61	61

RC - Ceiling Cavity Reflectance


RW - Wall Reflectance

ER3-LED-2000L-DIM10-MVOLT-ND-40K-90-ES3-F-1302

TEST NO.: **EL121859**

INPUT WATTS: **26** LUMENS: **2074** CRI: **90** EFFICACY: **80** CCT: **4000K** SPACING CRITERIA: **0.58**

Candle Power Distribution Curve



Cone of Light		
4.0	19.6 fc	9.7 ft
8.0	4.91 fc	19.4 ft
12.0	2.18 fc	29.2 ft
16.0	1.23 fc	38.9 ft
20.0	0.79 fc	48.6 ft
24.0	0.55 fc	58.3 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	1328.27	64.00	64.00
0-30	1859.75	89.70	89.70
0-40	1978.49	95.40	95.40
0-60	2044.3	98.60	98.60
0-80	2070.39	99.80	99.80
0-90	2074.13	100.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	8402	10983	44171
55	9606	8659	8514
65	7988	8196	7781
75	6281	6848	7584
85	4550	9175	10381

Lumens Per Zone

Zone	Lumens
0-10	466.98
10-20	861.28
20-30	531.48
30-40	118.74
40-50	43.23
50-60	22.58
60-70	16.59
70-80	9.50
80-90	3.74

Candela Tabulation

0	0
0	5672.78
5	5588.30
15	3470.81
25	1070.95
35	49.27
45	27.12
55	25.15
65	15.41
75	7.42
85	1.81
90	0.10

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80%				70%				50%				30%				10%				0%			
	RW	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%
ROOM CAVITY RATIO	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100	100	100
1	114	112	110	108	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95	95	95
2	110	105	102	99	99	108	104	101	98	101	98	96	98	96	94	95	93	92	90	90	90	90	90	90
3	105	100	96	92	92	103	99	95	92	96	93	90	94	91	89	91	89	87	86	86	86	86	86	86
4	101	95	90	87	87	100	94	90	86	92	88	85	90	87	84	88	86	83	82	82	82	82	82	82
5	97	91	86	82	82	96	90	85	82	88	84	81	86	83	80	85	82	80	78	78	78	78	78	78
6	94	87	82	78	78	93	86	81	78	84	80	77	83	80	77	82	79	76	75	75	75	75	75	75
7	90	83	78	75	75	89	82	78	74	81	77	74	80	76	74	79	76	73	72	72	72	72	72	72
8	87	80	75	71	71	86	79	74	71	78	74	71	77	73	71	76	73	70	69	69	69	69	69	69
9	84	76	72	68	68	83	76	71	68	75	71	68	74	71	68	74	70	68	67	67	67	67	67	67
10	82	74	69	66	66	81	73	69	66	73	68	66	72	68	65	71	68	65	64	64	64	64	64	64

RC - Ceiling Cavity Reflectance


RW - Wall Reflectance

ER3-LED-2000L-DIM10-MVOLT-WD-40K-90-ES3-F-1302

TEST NO.: **EL121867**

INPUT WATTS: **27** LUMENS: **1692** CRI: **90** EFFICACY: **63** CCT: **4000K** SPACING CRITERIA: **0.80**

Candle Power Distribution Curve



Cone of Light		
4.0	8.6 fc	15 ft
8.0	2.15 fc	30 ft
12.0	0.96 fc	45 ft
16.0	0.54 fc	60 ft
20.0	0.34 fc	74.9 ft
24.0	0.24 fc	89.9 ft
Distance to Plane	Initial Footcandle at Nadir	Beam diameter

BEAM DIA. MEASURED AT 50% OF NADIR F.C.

Zonal Lumens Summary

Zone	Lumens	%Lamp	%Fixt
0-20	808.64	47.80	47.80
0-30	1349.9	79.80	79.80
0-40	1559.85	92.20	92.20
0-60	1658.36	98.00	98.00
0-80	1688.23	99.80	99.80
0-90	1692.03	100.00	100.00

Luminance (Average candela/M²)

Angle in Degrees	Average 0°	Average 45°	Average 90°
45	11377	33907	69316
55	13406	12302	9098
65	12140	10720	8418
75	9836	9269	8143
85	8320	10758	9954

Lumens Per Zone

Zone	Lumens
0-10	230.88
10-20	577.77
20-30	541.26
30-40	209.95
40-50	71.64
50-60	26.87
60-70	19.11
70-80	10.75
80-90	3.80

Candela Tabulation

0	0
0	2485.95
5	2420.52
15	1972.34
25	869.97
35	219.53
45	36.72
55	35.10
65	23.42
75	11.62
85	3.31
90	0.08

Coefficients of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	☐ LEDRU LED Relay Zone Controller 0-10V ¹ ☐ LEDDU LED Zone Controller 0-10V ¹	☐ FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminaire is shipped Vive Enabled) ^{1 4} ☐ FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminaire is shipped Vive Enabled) ^{1 4}	☐ CU-4E-FMH Fixture Mount Control Unit ^{1 5}	☐ ZL027 -NOW Intellect Power Control Module ^{1 6} ☐ ZL027 -NOW Intellect Power Control Module ^{1 6}	☐ EN-WCM2-ZB-DR Wireless Control Module ^{1 7} ☐ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ^{1 7} ☐ ZBHA-CLM-DIM-ENC Connected Lighting Module DIM ^{1 7}	☐ SBR -BS Xitanium SR Bridge ^{1 8}	☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ^{1 9}
INTEGRAT SENSOR	N/A	N/A	N/A	N/A	N/A	N/A	N/A
*WIRELESS OCCUPANCY SENSOR	☐ EOSCU-W-EO Occupancy Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³	N/A	N/A	N/A	N/A	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	☐ ELLSU-W-EO Light Level Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³	N/A	N/A	N/A	N/A	N/A	☐ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ³ ☐ SU-5E-CL Connected Lighting Micro Sensor ³ ☐ SU-5E-IL Independent Lighting / Enlighted One Micro Sensor ³ ☐ SU-5S-H-(IoT/CL/IL) Surface Mount Sensor ³ (Must be specified with CU- 4E-FMH Control Unit)	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ³ (Must be specified with ZL027 -NOW Control Unit)	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³ (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit)	☐ SNS200- CMP SNS200 for grouping ³	N/A
ACCESORIES	N/A	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 inch Sensor Cable for CU-4 and IoT Ready™ drivers ☐ CBL-5E-CU4-7F 7 foot Sensor Cable for CU-4 and IoT Ready™ drivers	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with Lutron LRF2-OCR2B-P-WH Ceiling mount 360° occupancy/vacancy sensor & LRF2-DCRB-WH Ceiling-mount daylight sensor. Sensors must be ordered through Lutron.	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5S-H, Sensors.	6- Luminaire will be compatible with Leviton Intellect App & Keypad Room Controller	7- Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors	8- Luminaire will be compatible with Philips field and wireless switch.	9- Luminaire will be compatible with DLM Room control system LMPB-100. DLM control system must be ordered through Legrand.