POST PAINTED
Poly carbonate Lens with - UV radiation protection

Features
:: Easy-fit cover channel attachment.
:: Tool-less wire-way access.
:: Detachable channel cover gives hands-free wiring and quick installation.
:: Romex/BX conduit connector included with every fixture.
:: Soft-lumens, linear prismatic diffuser gives better visual comfort.
:: Available with factory-installed lamp, rocker switch, cordset and outlet options.
:: Knockouts available at the back, side and rear for easy installation
:: Available keyhole mounting slots on the back

Specifications
:: Ballast
Normal power factor electronic type ballast standard.
:: Electrical
Fixture conforms to UL 1570 and is suitable for damp locations.

Finish
U.V. coated rust resistance. Painted parts finished with polyester powder coating. 22 gauge die-formed steel housing.
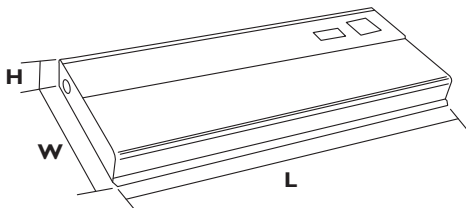
Listing
UL/C-UL listed and labeled

EZU-18-T8/T12E

EZU-24-T8/T12E

EZU-36-T12E

EZU-48-T12E

Example: **EZU-36-MARK7-120**

TYPE	LAMP TYPE	DIMMING	VOLTAGE	COLOR	OPTIONS	DIMENSION
❏ EZU-18-T8/T12-E	(1) F15 T8 / F15 T12	❏ MARK 7	❏ 120 (STANDARD)	❏ WH (WHITE)	❏ (SW) Rocker switch (120V only) **(BP11)**	18" L X 5" W X 1-3/4" THICK
❏ EZU-24-T8/T12-E	(1) F17 T8 / F20 T12	❏ MARK 10	❏ 277		❏ (RC) Grounded outlet (120V only) **(BP12)**	24" L X 5" W X 1-3/4" THICK
❏ EZU-36-T8/T12-E	(1) F25 T8 / F30 T12				❏ (CS) 6', 3-wire grounded cordset	36" L X 5" W X 1-3/4" THICK
❏ EZU-48-T8/T12-E	(1) F32 T8 / F34 T12				❏ (L) Lamp	48" L X 5" W X 1-3/4" THICK
❏ EZU-36-T12-E	(1) F30 T12					36" L X 5" W X 1-3/4" THICK
❏ EZU-48-T12-E	(1) F34 T12					48" L X 5" W X 1-3/4" THICK

BP12
3/8" connector for EU undercabinet

BP11
Switch for EU & EZU Undercabinet series

Due to the changes of constant improvement in lighting technology, all details are subject to change without notice. Consult factory for up to date information.

elite LIGHTING