


ADJUSTABLE

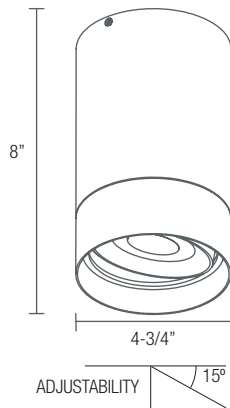

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
2500	2433	28W
2000	1917	17W
1200	1410	14W
900	1006	11W


Based on 3000K, 90+ CRI. Actual wattage may vary +/- 5%

FEATURES


The FPR1-ADJ-LED is an adjustable cylinder that can be rotated 360 degrees and tilted up to 15 degrees. Surface mount design conceals hardware and sits flush in the ceiling for a seamless look. Available in suspended, stem, and surface mounting, with all necessary mounting hardware included. Multiple beam spreads, finishes, and field-changeable, lockable optics—the FPR1-ADJ easily adapts to a variety of applications including retail, hospitality, commercial, and residential.

LUMENS	900, 1200, 2000, 2500
CCT	30K, 35K, 40K, 50K
CRI	90+
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTION	Spot (15°), Narrow Flood (24°) Flood (36°), Wide Flood (60°)
MOUNTING	Suspended, pendant, surface
FINISH	AWH (Architectural White) ABK (Architectural Black)
DIMMING	DIM10 (0-10V Dimming) DIMTR (Triac dimming)
LIFETIME	L70 at 100,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21


WFL: WIDE FLOOD
Candlepower Distribution Curve




FL: FLOOD
Candlepower Distribution Curve



NFL: NARROW FLOOD
Candlepower Distribution Curve



SP: SPOT
Candlepower Distribution Curve



Reference IES files for additional distribution curve information.



OPTICS

Polycarbonate reflector conceals light source and delivers low-glare, uniform distribution. Field-changeable optics are available in 15, 24, 36, and 60-degree beam spreads.

MOUNTING

- Cable, stem, and surface.
- Cable/pendant mount supplied with complete canopy assembly and matched to fixture body finish.
- Cable mount height is field-adjustable up to 10 ft.

CONSTRUCTION

Extruded aluminum cylinder housing; aluminum internal heatsink. Surface mount option conceals mounting hardware. Ceiling mounting plate constructed of galvanized steel. Post-painted in white, black, and custom RAL colors.

MOUNTING BRACKET AND SUSPENSION SYSTEM

Fixture includes a mounting bracket for direct installation to 3 ¼" to 4" octagonal and square junction boxes. When mounted to junction box, luminaire sits flush in the ceiling. Pendant mount option is supplied with a 10-ft. adjustable aircraft cable and power cord, which can be field adjusted to desired length. Consult factory for custom mounting and stem options.

WARM DIM COMPATIBLE

Warm Dim is a controlled dimming technology that shifts color temperature from a 3000K (full brightness) down to 1800K (full dim). Mimicking the black body curve of halogen light sources, the result is careful dimming: vibrant, comfortable illumination down to a warm, amber glow. Warm Dim is the perfect mood-setting solution for retail, restaurants, hotels, commercial, and residential applications.

DIMMING & DRIVER INFORMATION

DIM10 - 0-10V dimming on either MVOLT or 120. Dimmable down to 1% standard.

DIMTR - Triac & Electronic Low Voltage (ELV) dimming, available in 120V.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

LISTING

c-UL-us-Listed

Example: FPR1-ADJ-LED-1200L-DIM10-MVOLT-WFL-35K-90-BK

SERIES	LUMENS	DIMMING	VOLTAGE	OPTICS	CCT/CRI	COLOR
FPR1-ADJ-LED	☐ 900L ☐ 1200L ☐ 2000L ☐ 2500L	☐ DIMTR ☐ DIM10	☐ 120 ☐ MVOLT	☐ SP (15°) ☐ NS (24°) ☐ FL (36°) ☐ WFL (60°)	☐ 30K-90 ☐ 35K-90 ☐ 40K-90 ☐ 50K-90	☐ BK(Black) ☐ WH(White) <i>Custom colors available. Please consult factory</i>

