



**EASY 5 COLORS
SELECTOR**
2700K • 3000K • 3500K • 4000K • 5000K




2 HOUR FIRE RATING

Tested to comply with UL 263, ASTM E119 & CAN ULC S101



DIMENSION

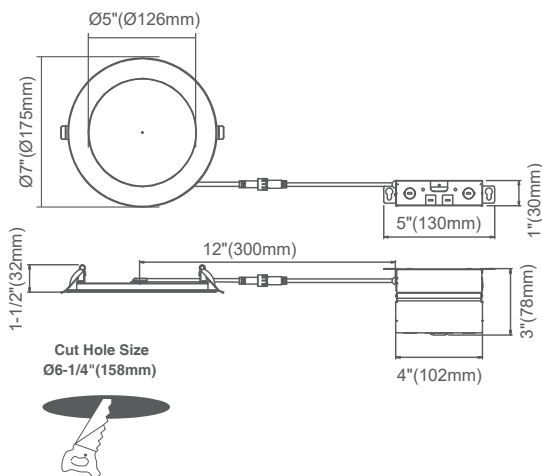

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
1100	1147	15W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

opening by s

INSTALLATION

Cut hole in ceiling. Insert luminaire into squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

FEATURES

2 Hours Fire Rated 6" round multi-CCT LED "Slim Disk" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 5-Color SeleCCTor switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.

LUMENS	1100
CCT	27K/30K/35K/40K/50K
CRI	90+
COLOR QUALITY	3-Step MacAdam Ellipse
CONSTRUCTION	Aluminum die-cast body and trim
TRIM OPTION	Round Flat Lens
TRIM COLORS	WH (White), BK (Black), BZ (Bronze), CP (Copper) and SN (Brushed Nickel)
DIMMING	DIMTR (Triac)
EMERGENCY	16W high voltage inverter (remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

FEATURES

- 2-Hour fire rating
- providing a reinforced and heat resistant steel casing
- Selectable color temperature: 27K, 30K, 35K, 40K & 50K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED

SLIM TRIM



TRIM RINGS



FS-RL675-RT-BK
(Black)



FS-RL675-RT-BZ
(Bronze)



FS-RL675-RT-BN
(Chrome)



FC-RL675-RT-CP
(Copper)

ACCESSORIES




RL-ACC-SLIM-1-10F
10-ft long extension





RL-ACC-SLIM-1-20F
20-ft long extension



RL-UNV-4/5/6
For use with: 4", 5", 6"
Universal mounting plate



AL-ACC-SLIM-6-F-ROUGHPLATE
For use with: 6" downlights

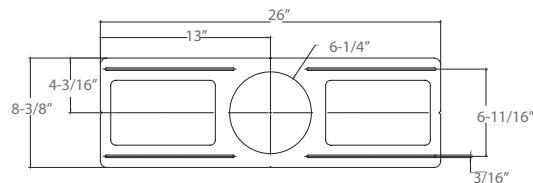

RL-ACC-SLIM-6-ROUGHPLATE
Rough-in plate for use with 6" downlights

EXAMPLE:
FS-RL675-1100L-DIMTR-120-27K/30K/35K/40K/50K-90-WH

TYPE	LUMEN	CCT	CRI	FINISH
FS-RL675	1100L-DIMTR-120	27K/30K/35K/40K/50K	90+	WH - White

FS-RL675-RT-BZ

ACCESSORIES
<input type="checkbox"/> FS-RL675-RT-BZ - Bronze <input type="checkbox"/> FS-RL675-RT-BK - Black <input type="checkbox"/> FS-RL675-RT-BN - Brushed Nickel <input type="checkbox"/> FS-RL675-RT-CP - Copper

RL-ACC-SLIM-1-10F

OPTIONS
<input type="checkbox"/> RL-ACC-SLIM-1-10F - 10ft Long Extension <input type="checkbox"/> RL-ACC-SLIM-1-20F - 20ft Long Extension <input type="checkbox"/> RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6" <input type="checkbox"/> RL-ACC-SLIM-6-F-ROUGHPLATE - 6" Mounting Plate <input type="checkbox"/> AL-ACC-SLIM-6-F-ROUGHPLATE - 6" Flanged Roughplate