




REFLECTOR/
FLANGE COLORS

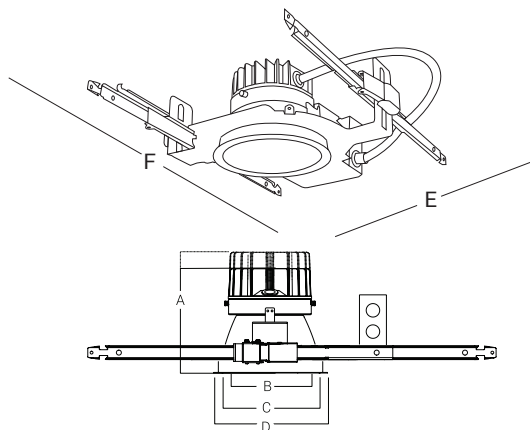

A 900L to 4000L: Height = 7-1/8"
A 6000L to 8000L: Height = 10-5/8"
B: Trim Aperture = 7-15/16"
C: Cut-Out = 8-11/32"
D: Trim Outside Dia = 9-1/8"
E: Width = 16-1/8"
F: Length = 20-33"

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGE
8000	7948	79 W
6000	6542	76 W
4000	4733	49 W
3000	3584	44 W
2000	2430	28 W
1500	1809	22 W
1200	1468	16 W
900	1113	12 W

Based on 4000K, 90+CRI with semi-specular chrome reflector.
Actual wattage may vary +/-5%

FEATURES


A highly sustainable and ultra-efficient architectural LED downlight that provides even, glare-free illumination. Available in a range of finishes, distributions, and lumen packages, it is ideally suited for use in corporate office space, hospitality, healthcare, commercial, academic, churches and retail.

OPTICS AND REFLECTOR


The reflector has a 45° visual cutoff, and is shipped standard with a Solite lens in a smooth frosted finish. Spun from 0.05" thick aluminum, with a 1-step anodized finish, and available in different colors or custom RAL finishes. Reflector flange options include self-flanged and white painted flange. Various distribution options are available, and all optics are field changeable.

LUMENS	900, 1200, 1500, 2000, 3000, 4000, 6000, 8000 (Custom lumen packages available)
CCT & DYNAMIC PLATFORMS	22K, 27K, 30K, 35K, 40K, 50K, Tunable White, Dims to Warm, RGB + White
CRI	90+ Standard, 98+ Optional
COLOR QUALITY	2 Step MacAdam Ellipse
DISTRIBUTIONS	WD (Wide Distribution), MD (Medium Distribution) and ND (Narrow Distribution)
TRIM OPTIONS	Downlight, Wall Wash, Double Wall Wash, Wet Location
REFLECTOR COLORS	CL (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), WT (Wheat), WH (White), MB (Black)
FLANGE COLORS	Self-Flanged WH (White), SCH (Semi-Specular Chrome), SHZ (Low Iridescent Satin Haze), BK (Black)
DIMMING	0-10V Flicker Free 1% Dimming Standard (DIM10), LUTH, LUTFB, LUT2W, ELDO10.1, ELDDMX.1, ELDDALI.1, DIMTR
EMERGENCY	10W - Up to 1000L Output 20W - Up to 2000L Output EMG-LED-G2-10W-SDT - Self Diagnostic (Consult Factory)
LIFETIME	L70 at 102,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21


WD: Wide
Candlepower Distribution Curve



MD: Medium
Candlepower Distribution Curve



ND: Narrow
Candlepower Distribution Curve



Reference IES files for additional distribution curve information.



THERMAL MANAGEMENT SYSTEM

Passive cooling Diecast Aluminum Heat Sink, LED light engine and driver are replaceable, upgradeable, and can be accessed from below the ceiling. The consistency in the quality of light is delivered with precision performance by the use of a unique locking mechanism that aligns the reflector with the light engine.

MOUNTING FRAME & BRACKETS

The downlight mounting frame is a fabricated assembly constructed of 16-gauge steel, with C-channel mounting brackets, included. The versatility of the mounting brackets allow for an adjustability of up to 28" horizontally, and 2-3/4" vertically, locking into place. With the added die-formed construction of the mounting frame, it provides maximum heat dissipation and rust protection.

DRIVER ELECTRICAL INFORMATION

The LED driver is rated for 50 to 60Hz at 120V/277V, also available in 347V input, produces less than 20%THD, has a power factor between 90% and 100%, and is thermally protected for additional safety. Junction box and Driver can be accessed from below the ceiling and above the ceiling. Junction Box is Listed for through branch circuit wiring.

DIMMING & DRIVER INFORMATION

DIM10 - 0-10V dimming on either MVOLT 120, 277 or 347V. Dimmable down to 1% of initial lumens, standard.

DIMTR - Triac & Electronic low voltage dimming. Available in 120V, and up to 4000 lumens only.

LUT2W - Lutron LTEA2W Hi-Lume 1%. 2-wire LED Driver Forward Phase Control, 1% dimming in 120V only. Available on all luminaires up to 3000 lumens.

LUTH - Lutron LDE1 Hi-Lume Eco System. 1% dimming with Soft in Fade to Black dimming technology. Available on all luminaires up to 3000 lumens.

LUTFB - Lutron PEQ0 Hi-Lume Premier Eco System. 0.1% dimming with Soft in Fade to Black dimming technology. Available on all luminaires up to 1500 lumens.

ELDO10.1 - EldoLED SoloDrive 0-10V. Dimming down to 0.1%.

DALI - DALI DT6, DT8 dimming down to 1%.

ELDODMX - EldoLED PowerDrive dimming down to 0.1%.

Please see EldoLED website for wiring diagrams and a list of compatible DMX and DALI control systems.

WARRANTY

Five-year warranty for parts and components. (Labor not included)

Example: HH8-LED-4000L-DIM10-MVOLT-MD-40K-90-HH8-8501-CL-WH

SERIES	LUMENS	DRIVER	VOLTAGE	CCT	EMERGENCY	TRIM TYPE	REFLECTOR/FLANGE COLORS
HH8-LED	☐ 900L ☐ 1200L ☐ 1500L ☐ 2000L ☐ 3000L ☐ 4000L ☐ 6000L ☐ 8000L ¹	☐ DIM10 ☐ DIMTR ³ ⁶ ☐ LUTH ² ⁶ ☐ LUT2W ³ ⁶ ☐ LUTFB ⁷ ☐ ELDO10-1 ² ☐ ELDODALI-1 ² ☐ ELDODMX-1 ²	☐ 120 ☐ 277 ☐ MVOLT ☐ 347 (DIM10 only) ☐ 50K ⁴	☐ 22K ☐ 27K ☐ 30K ☐ 35K ☐ 40K ☐ 50K ⁴	☐ EMG-LED-10W ☐ EMG-LED-20W ☐ INTG-EMG-LED-10W ☐ INTG-EMG-LED-20W ☐ EMG-LED-G2-10W-SDT* Typical lumen output of the luminaire is up to 1000L with EMG-LED-10W option & 2000L with EMG-LED-20W option in emergency mode. Contact the factory for details. Remote mounted installation * Consult Factory for Self Diagnostic	☐ HH8-8501 Flanged Downlight ☐ HH8-8577 Flanged Double Wall Wash ☐ HH8-8507 Flanged Wall Wash	☐ CL-WH ☐ CL-SCH ☐ SHZ-WH ☐ SHZ-SHZ ☐ WT-WH ☐ WH-WH ☐ MB-WH* ☐ CL-BK ☐ MB-BK*
			OPTICS	CRI	OPTIONS	TRIMLESS	* Black color trim is not ENERGYSTAR certified
			☐ WD ☐ MD ☐ ND	☐ 90+ ☐ 98+ ⁵	☐ CP (Chicago Plenum)	☐ HH8-TL-8507 Trimless Wall Wash ☐ HH8-TL-8501 Trimless Downlight	
						OPTIONS	
						☐ INTG (Reflector shipped with pre-punched hole to accept INTG-EMG-LED)	

¹ DIM10 5% is available only for 8000L ²LUTH, ELDO10-1, ELDODALI-1, and ELDODMX-1 are available in 120V and 277V ³DIMTR and are LUT2W available in 120V only
⁴ 50K series are available with 85+ CRI only ⁵ 98+ CRI is available in 27K, 30K and 40K only ⁶ DIMTR and LUTH, LUT2W Available for luminaires up to 4000L ⁷ LUTFB Available for luminaires up to 1500L
 -Reference last page for Control Options

1- Luminaire will be shipped with Powerpacks pre-installed, ready to be integrated to designated control systems

2- Luminaire will be shipped with Sensors installed on the luminaire, allowing for individual luminaire control. Luminaires will be ready to be integrated with designated control systems

3- Luminaire will be shipped with Sensors to be remotely installed on the ceiling. Luminaires will be ready to be integrated with designated control systems

BRAND	EASYFIT by EnOcean	LUTRON	enlighted	LEVITON®	OSRAM	PHILIPS EasySense	legrand®
CONTROL UNIT	☐ LEDRU LED Relay Zone Controller 0-10V ¹	☐ FCJS-010 Lutron Vive 0-10V Individual Pow Pak (Luminaire is shipped Vive Enabled) ¹⁴	☐ CU-4E-FMH Fixture Mount Control Unit ¹⁵	☐ ZL027 –NOW Intellect Power Control Module ¹⁶	☐ EN-WCM2-ZB-DR Wireless Control Module ¹⁷	☐ SBR -BS Xitanium SR Bridge ¹⁸	☐ LMFC-011 ON/OFF/0-10V dimming fixture controller ¹⁹
	☐ LEDDU LED Zone Controller 0-10V ¹	☐ FCJS-ECO Lutron Vive Eco-system Pow Pak (Luminaire is shipped Vive Enabled) ¹⁴		☐ ZL027 –NOW Intellect Power Control Module ¹⁶	☐ EN- ALC-ZB-BK-DR Wireless Area Lighting Control Module ¹⁷ ☐ ZBHA-CLM-DIM-ENC Connected Lighting Module DIM ¹⁷		
INTEGRAT SENSOR	N/A	N/A	N/A	N/A	N/A	N/A	N/A
*WIRELESS OCCUPANCY SENSOR	☐ EOSCU-W-EO Occupancy Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³	N/A	N/A	N/A	N/A	N/A	☐ LMDC-100 Dual technology PIR Ceiling Mount Occupancy Sensor ³
*WIRELESS DAYLIGHT SENSOR	☐ ELLSU-W-EO Light Level Sensor - Ceiling Mounted (Must be specified with LEDRU or LEDDU control unit) ³	N/A	N/A	N/A	N/A	N/A	☐ LMLS-400 Single zone switching and dimming digital photosensor ³
*WIRELESS OCCUPANCY & DAYLIGHT SENSOR	N/A	N/A	☐ SU-5E-IoT IoT Node Micro Sensor ³ ☐ SU-5E-CL Connected Lighting Micro Sensor ³ ☐ SU-5E-IL Independent Lighting / Enlighted One Micro Sensor ³ ☐ SU-5S-H-(IoT/CL/IL) Surface Mount Sensor ³ (Must be specified with CU- 4E-FMH Control Unit)	☐ ZL00J -TOW Intellect Intelligent Fixture Control System ³ (Must be specified with ZL027 –NOW Control Unit)	☐ EN-CLM-PIR-DD-ZB SensiLUM™ Wireless Integrated Sensor ☐ EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors ³ (Must be specified with EN-WCM2-ZB-DR or EN- ALC-ZB-BK-DR Control Unit)	☐ SNS200- CMP SNS200 for grouping ³	N/A
ACCESSORIES	N/A	N/A	☐ TMC-SU-5E Tile Mount Carrier ☐ CBL-5E-CU4-30N 30 inch Sensor Cable for CU-4 and IoT Ready™ drivers ☐ CBL-5E-CU4-7F 7 foot Sensor Cable for CU-4 and IoT Ready™ drivers	N/A	N/A	N/A	N/A
NOTES	N/A	4- Luminaire will be compatible with Lutron LRF2-OCR2B-P-WH Ceiling mount 360° occupancy/vacancy sensor & LRF2-DCRB-WH Ceiling-mount daylight sensor. Sensors must be ordered through Lutron.	5- Luminaire will be compatible with ENLIGHTED SU-5E-IoT, SU-5E-CL, SU-5E-IL, SU-5S-H, Sensors.	6-Luminaire will be compatible with Leviton Intellect App & Keypad Room Controller	7-Luminaire will be compatible with EN-SCPPH-1500-ZB Wireless Passive Infrared Occupancy and Photo Sensors	8-Luminaire will be compatible with Philips field and wireless switch.	9-Luminaire will be compatible with DLM Room control system LMPB-100. DLM control system must be orderd through Legrand.